

basic basic

FLIP-1

AN INTRODUCTION TO COMPUTER PROGRAMMING
IN BASIC LANGUAGE

second edition

JAMES S. COAN

```
2  FOR Y=1 TO 10
5  LET C=0
10  FOR X=1 TO 50
20  LET F=INT(2*RND(1))
30  IF F=1 THEN 60
40  PRINT "T";
50  GOTO 100
58  REM C COUNTS THE NUMBER OF HEADS
60  LET C=C+1
70  PRINT "H";
100 NEXT X
110 PRINT
120 PRINT "HEADS  ";C;"OUT OF 50 FLIPS"
125 NEXT Y
130 END
```

RUN

FLIP-1

```
HTTTTTHTTHTTHTTTTTTTTTHTHHHHHTTTTTHTHHHTHHHTTHTT
HEADS  21  OUT OF 50 FLIPS
HTTHTHTTHTTHTTHTTTHHHHTTTTTTHHHHTTHTTTHHHHTHTTTHH
HEADS  26  OUT OF 50 FLIPS
HTHTTTHTTHTTHTTTTTTTTTHTTHTTHTTHTTHTTTTTTTHHTTHHT
HEADS  17  OUT OF 50 FLIPS
THTTTTTHTHTHTHTHHHHHTTHTTHTTHTTTTTTTHHTHTTHTTHTT
HEADS  21  OUT OF 50 FLIPS
TTHHTTTTTHTHTTHTTHTTHHHHTTHTTHHHHTTTTTHTHHHTTHTTHTT
HEADS  24  OUT OF 50 FLIPS
HTHTHHHHHHHTTTTTTTTTHTTTHHHHTTHTTTTTHTTHTTHTTHTTHTH
HEADS  26  OUT OF 50 FLIPS
HTTTTTHTTTTTHTTHTTHTTTHHHHTTHTTTHHHHTTHTTHTTHTTTTTHT
HEADS  22  OUT OF 50 FLIPS
THTHHHHHTHTTTHHTTHTTTHHHHTTHTTHTTTHHHHTTHTTTHHTTHTT
HEADS  34  OUT OF 50 FLIPS
HTTHTHTTHTTTTTTTHHTTHTTTHHTTHTTTHHHHTTHTTHTTHTTHTT
HEADS  24  OUT OF 50 FLIPS
THTHTHTTHTTHTTHTTTHHHHTTHTTTHHTTTTTHTTHTTHTTHTTHTT
HEADS  26  OUT OF 50 FLIPS
```

DONE

HAYDEN

Basic BASIC

An Introduction to Computer Programming in BASIC Language

Hayden Computer Programming Series

COMPREHENSIVE STANDARD FORTRAN PROGRAMMING

James N. Haag

BASICS OF DIGITAL COMPUTER PROGRAMMING (Second Ed.)

John S. Murphy

BASIC BASIC: An Introduction to Computer Programming in BASIC Language (Second Ed.)

James S. Coan

ADVANCED BASIC: Applications and Problems

James S. Coan

DISCOVERING BASIC: A Problem Solving Approach

Robert E. Smith

ASSEMBLY LANGUAGE BASICS: An Annotated Program Book

Irving A. Dodes

PROGRAMMING PROVERBS

Henry F. Ledgard

PROGRAMMING PROVERBS FOR FORTRAN PROGRAMMERS

Henry F. Ledgard

FORTRAN WITH STYLE: Programming Proverbs

Henry F. Ledgard and Louis J. Chmura

COBOL WITH STYLE: Programming Proverbs

Louis J. Chmura and Henry F. Ledgard

BASIC WITH STYLE: Programming Proverbs

Paul Nagin and Henry F. Ledgard

SNOBOL: An Introduction to Programming

Peter R. Newsted

FORTRAN FUNDAMENTALS: A Short Course

Jack Steingraber

THE BASIC WORKBOOK: Creative Techniques for Beginning Programmers

Kenneth E. Schoman, Jr.

BASIC FROM THE GROUND UP

David E. Simon

APL: AN INTRODUCTION

Howard A. Peelle

Basic BASIC

SECOND EDITION

An Introduction to Computer Programming in BASIC Language

JAMES S. COAN

*Community Computer Corporation
Germantown Friends School*



HAYDEN BOOK COMPANY, INC.
Rochelle Park, New Jersey

Library of Congress Cataloging in Publication Data

Coan, James S

Basic BASIC: an introduction to computer programming in BASIC language.

(Hayden computer programming series)

Includes indexes.

1. Basic (Computer program language).
2. Electronic digital computers—Programming.

I. Title.

QA76.73.B3C62 1978

001.6'424

77-14640

ISBN 0-8104-5107-7

ISBN 0-8104-5106-9 pbk.

Copyright © 1970, 1978 by HAYDEN BOOK COMPANY, INC. All rights reserved. No part of this book may be reprinted, or reproduced, or utilized in any form or by any electronic, mechanical, or other means, now known or hereafter invented, including photocopying and recording, or in any information storage and retrieval system, without permission in writing from the Publisher.

Printed in the United States of America

4 5 6 7 8 9 PRINTING

79 80 81 82 83 84 85 YEAR

Preface

With the increasing availability of computer access through remote terminals and time sharing, more and more schools and colleges are able to introduce programming to substantial numbers of students.

This book is an attempt to incorporate computer programming, using BASIC language, and the teaching of mathematics. I believe the two activities support each other.

Flowcharts are used throughout the text. The general approach is to begin with short complete programs and then simply and methodically build them into larger programs. Each new capability or new organization of capabilities is presented to create a desired effect in a program. Details are introduced only as they become necessary or useful for the writing of a program, rather than as sets of facts to be memorized in case a particular situation should ever arise. Over 125 programs are used to achieve this.

All of the elementary BASIC language capabilities are presented in the first five chapters and Chap. 7. Chapter 6 and Chaps. 8–13 emphasize applications. The first seven chapters may be studied in conjunction with, or at any time following, a first-year algebra course. Chapters 8–13 are applications oriented, covering many of the popular topics of precalculus mathematics, with all of the required algorithms developed in the text. Thus, this text is suitable for use either as a supplementary text to be incorporated into existing mathematics courses, or as the text for a course or unit to cover programming alone.

Appendices A and B, respectively, present information for the operation of programs on paper tape and a few comments on error diagnosis. Appendix C introduces two formatting capabilities that are available on some time-sharing systems. Flowchart shapes are summarized in Appendix D. A summary of BASIC statement types is provided in Appendix E and an index of all the programs in Chaps. 2–13 is provided in Appendix F.

Many of the problems in the book are intended to enable the student to develop interesting mathematical concepts upon seeing the printed results of program RUNS. Possible solution programs are given in Appendix G for the even-numbered problems to give the student an indication of the correctness

of his program without being required to run every program. However, particularly at the beginning, students derive greater benefit from seeing programs run (or not run) than from any other programming activity.

I wish to thank Germantown Friends School for its support in the preparation of this text. Thanks are due Mrs. Geoffrey Wilson for test teaching and numerous students for test learning portions of the manuscript.

JAMES S. COAN

Philadelphia

Preface to the Second Edition

The First Edition of this book has been significantly enhanced by presenting character string handling and the use of data files. Since strings and files involve language differences which depend on the computer, two versions are presented. Demonstration programs are presented in Chap. 7 for both General Electric Information Services BASIC and Hewlett-Packard BASIC.

The little used statement RESTORE is no longer discussed, and the INPUT statement is now presented in Chap. 1.

Thanks are due to the Community Computer Corporation for assistance in the preparation of material for this Second Edition.

JAMES S. COAN

Philadelphia

Contents

Chapter 1—Introduction to BASIC	1
1-1 PRINT	1
1-2 READ—DATA	3
1-3 System Commands	4
1-4 LET	5
1-5 INPUT	6
1-6 Sample Programs	6
1-7 Comma and Semicolon in PRINT Statements	10
Summary and Problems for Chap. 1	11
Chapter 2—Writing a Program	13
2-1 Planning	13
2-2 REM	13
2-3 Flowcharting	13
2-4 IF—THEN	15
Summary and Problems for Chap. 2	22
Chapter 3—Loops and Lists	24
3-1 Introduction to Machine-Made Loops	24
Summary and Problems	31
3-2 More on Loops	31
Summary and Problems	34
3-3 Introduction to Lists	35
Summary and Problems	38
3-4 More on Lists	40
Summary and Problems	45
Chapter 4—Computer Functions	47
4-1 Introduction to INT(), SQR(), ABS(), and SGN()	47
Summary and Problems	50
4-2 Reducing Common Fractions and Dimension	
Conversions	50
Summary and Problems	54
4-3 Program-Defined Functions	55
Summary and Problems	61
4-4 Random Number Generator	62
Summary and Problems	71

Chapter 5—Elementary Data Processing	73
5-1 Introduction to Data Processing	73
Summary and Problems	77
5-2 Arrays	78
Summary and Problems	84
5-3 A More Detailed Questionnaire Analysis	85
Summary and Problems	89
Chapter 6—Specific Applications	91
6-1 Euclidean Algorithm	91
Problems	93
6-2 Change Base	93
Problems	98
6-3 Looking at Integers Digit by Digit	98
Problems	100
Chapter 7—Strings and Files	101
7-1 Introduction to Strings	101
7-2 Strings—The Substring Scheme	103
Summary and Problems	105
7-3 The String Array Scheme	106
Summary and Problems	108
7-4 Introduction to Data Files	109
7-5 Hewlett-Packard Files	110
Summary and Problems	114
7-6 General Electric Files	115
Summary and Problems	121
Chapter 8—The Quadratic Function	122
8-1 Zeros	122
8-2 Axis of Symmetry and Turning Point	123
8-3 Plotting the Parabola	125
Summary and Problems for Chap. 8	131
Chapter 9—Trigonometry	132
9-1 Introduction to $\sin(X)$, $\cos(X)$, and $\tan(X)$	132
9-2 Right Triangles and Arctangent	133
Summary and Problems	137
9-3 Law of Sines and Law of Cosines	138
Summary and Problems	142
9-4 Polar Coordinates	143
Summary and Problems	145
Chapter 10—Complex Numbers	147
10-1 Fundamental Operations	147
Summary and Problems	149
10-2 Polar Coordinates	149
Summary and Problems	151
10-3 Powers and Roots	152
Problems	153
Chapter 11—Polynomials	154
11-1 Fundamental Operations	154
Summary and Problems	159
11-2 Integral Zeros	159
Summary and Problems	163

11-3 Real Zeros	163
Summary and Problems	168
11-4 Complex Zeros	168
Summary and Problems	175
Chapter 12—MAT Instructions in BASIC	176
12-1 Introduction to MAT Instructions	176
Problems	179
12-2 Solving a Problem	180
Problems	183
12-3 Operations and Special Matrices	185
Summary and Problems	188
12-4 Solving Simultaneous Linear Equations	190
Summary and Problems	193
12-5 Transpose of a Matrix	194
Problems	196
Chapter 13—Elementary Probability	197
13-1 Introduction	197
13-2 Enumeration	197
Summary and Problems	203
13-3 Simple Probability	204
Summary and Problems	206
13-4 Random Simulation	206
Problems	209
13-5 Binomial Trials	210
Problems	214
Appendix A—Storing Programs on Paper Tape	215
A-1 Introduction	215
A-2 Punching Paper Tape Off-Line	215
A-3 Reading Paper Tape	216
A-4 Getting the Computer to Punch Paper Tape	216
Appendix B—Error Diagnosis	218
B-1 Introduction	218
B-2 Errors that Prevent RUN	218
B-3 Errors that Terminate a RUN	221
B-4 Errors that Cause Unexpected or Incorrect Results	222
Summary	224
Appendix C—Special Formatting Functions	225
C-1 TAB(X)	225
C-2 IMAGE Statement	227
Appendix D—Summary of Flowchart Shapes	228
Appendix E—Summary of Statements in BASIC	229
Matrix Instructions	230
Functions	231
Files	232
Appendix F—Index of Programs in Text	235
Appendix G—Answers to Even-Numbered Problems	240
Index	263

Basic BASIC

An Introduction to Computer Programming in BASIC Language

CHAPTER 1

Introduction to BASIC

In working with a computer, you, the programmer, must communicate with the computer. In order to do that you will have to use a language that the computer will understand. There are many languages written for this purpose. The language of this text is called BASIC. The actual physical communication is rather complicated and we will ignore most of the mechanics except for the apparatus at our end of things. The device we will be using is called a *remote terminal*. It will have a specific name depending on the manufacturer. The remote terminal has a keyboard, which is the part we are most concerned about.

1-1 PRINT

No matter how complicated a particular set of instructions is, you will have to tell the computer to put the results into some form discernible to yourself. Therefore, let us begin with a discussion of the PRINT statement. If you want the computer to write the following statement "THIS IS A SHORT PROGRAM," you will type on the keyboard of the terminal as follows:

```
10 PRINT "THIS IS A SHORT PROGRAM."  
20 END
```

The computer, on proper instruction, will do exactly what you have set out to do.

The two lines 10 and 20 constitute a complete program. Several comments are in order here.

- 1) Note that every line in a program must begin with a positive integer.
- 2) The statement that we want to write out is in quotes; this may be used to good advantage, for example, for headings and labels.
- 3) In many time-share systems, every program must have as its highest numbered line the END statement. In some systems, the END statement is optional.

- 4) Note that all the letters are capitals. The terminal you may use or may not be restricted in this way. Note also that the letter "O" has a slash mark to distinguish it from the digit "0." On some terminals the reverse is true, the digit "0" has a slash and the letter "O" does not. On some printers one is more nearly a circle than the other or one is nearly diamond shaped. You can easily determine the method used by your equipment by examining some sample output on your screen or "hard copy."
- 5) It is conventional although not required to use intervals of 10 for the numbers of adjacent lines in a program. This is because any modification in the program must also have line numbers. So you can use the *in-between* numbers for that purpose. It should be comforting to know at this point that the line numbers do not have to be typed in order. No matter what order they are typed in, the computer will follow numerical order in executing the program.
- 6) Each line of a program is called a *program statement*.

You probably think of the computer as something that more commonly produces numerical results and you are partly correct. Suppose you wish to multiply 23.4 by 91. One way of doing this on the computer would be to write a program like this:

```
10 PRINT 23.4*91
20 END
```

Then on proper instruction the computer will type out the following and stop.

```
2129.4
DONE
```

Computers vary as to the message that gets printed here. Notice the absence of quotes. In this case you have instructed the computer to perform an operation. Had you in fact wanted 23.4 * 91 typed out, then you would change the program. You might write the following:

```
10 PRINT "23.4*91=", 23.4*91
20 END
```

This time the result will be as follows:

```
23.4*91=      2129.4
DONE
```

You have succeeded in instructing the computer not only to perform an operation, but to print out the result in easily understandable form, which is desirable throughout mathematics. Notice the use of the comma here. The comma may be used to separate the different parts of a PRINT statement. Used in this way, a comma is called a *delimiter*. Notice too, that there are eight spaces between the equals sign and the number. A way to eliminate all but one of them will be explained later. There are many fine points that we will discuss as we progress, but for now we will take it in small quantities.

If we were limited to the PRINT and the END instructions, we would quickly return to using pencil and paper or an ordinary desk calculator. With-

out some additional capability, the computer would soon disappear. This brings us to the READ and DATA statements.

PRINT

Characters in quotes will be printed exactly as typed. Computed results will be typed as decimal numbers or as integers.

1-2 READ-DATA

The READ statement says to look for DATA as in the following:

```
10 DATA 23.4, 91, 83, 19, 87, 94, 76, 5.98, 876, 918
20 READ A, B
30 PRINT A*B
35 GOTO 20
40 END
```

The computer ignores the DATA statement until it finds a READ, then it takes the first number in the first DATA statement and assigns that value to the first variable in the READ statement. Then, if there is a comma and another variable in READ as in our example, the computer assigns the second number in the DATA line to it; were there a third variable, the computer would continue until it ran out of variables. In our program, the first time through, $A = 23.4$ and $B = 91$. The next line says PRINT the product. Having printed the product the computer looks for the next instruction, which is GOTO 20. This is a new one that means exactly what it says. So the computer will GOTO line 20 and execute that instruction again. At this point the computer "knows" that it has already read and used the first two numbers in the DATA line. So it goes to the third and fourth numbers and assigns them to A and B in order and proceeds to print the product of 83 and 19, then goes back and assigns the fifth and sixth numbers to A and B, and so on until it runs out of numbers in the DATA line. There may be any number of DATA lines in a given program; all you need to realize for the time being is that a comma must be used to separate each discrete item of data and a comma should not be placed after the last item in a particular DATA line. Also, be careful not to use commas to designate thousands, millions, etc. *Warning:* You may not put variables or operation symbols in a DATA line. Only numbers in decimal form are allowed so far. Here is the computer's response to the above program:

```
2129.4
1577
8178
454.48
804168.
```

OUT OF DATA IN LINE 20

Note the explicit message at the completion of the print-out. This will vary from computer to computer.

In our examples so far, we have used only multiplication (*). The other arithmetic operations that you may use are addition ($+$), subtraction ($-$), division ($/$), and exponentiation (raising to a power). There are two symbols in common use for exponentiation: one is an upwards arrow ($\uparrow$), and the other is a double asterisk (**). Symbols used to instruct the computer to perform some operation are called *operators*. The symbols listed here are specifically designated as the arithmetic operators. The numbers on which the operation is to be performed are called *operands*. Contrary to convention in algebra, the multiplication symbol must be present. AB in algebra must be written $A * B$ for the computer. The computer assigns the same priorities to arithmetic operations as are assigned in algebra. If there are several operations of the same priority to be performed on the same line, the computer does them from left to right. Several sample programs will be given soon.

READ

The READ statement looks for numbers in a DATA statement. READ X, Y, Z looks for numbers in groups of three.

DATA

The DATA statement supplies values for the variables designated in the corresponding READ statement. Items of data must be separated by a comma. Numbers only are allowed.

1-3 SYSTEM COMMANDS

There are two kinds of instructions of which you should be aware. We have already discussed an instruction given by a program that you have written. We have not yet mentioned an equally important kind of instruction, the *system command*. We must realize that the computer does nothing by itself. Therefore, there must be what is called an *executive program* which will respond to your wishes. You need not worry about the executive program; it is taken care of by the people who maintain the computer.

The first system command required is referred to as the *sign-on* or *log-on*. The exact form of this varies from computer to computer. So we really cannot be specific here. It simply notifies the computer that you would like to use it.

Once you are signed on, the next most important command is RUN. After you have typed out your program, the computer must have a way of knowing that you want it to execute the program. So you must type RUN and then touch the return key on the keyboard. Only then will it respond to the programmed instructions.

Possibly next in importance is the command SCR (SCRub or SCRatch) or

CLE (CLEar) followed by depressing the return key. (Which you use will depend on the computer you are connected with.) Suppose you have run a program and someone else would like to run his. The old program may be erased by using the SCR command. So whenever you begin a new program it might be wise to simply type SCR and touch the return key. The system command must *not* be preceded by a number. There are several other commands that we will take up as they seem appropriate.

RUN

Notifies the computer to execute the program instructions. Must not have a number in front of it.

SCR or CLE

— NEW

Notifies the computer that you are not going to use the current program. The current program is erased from the working area of the computer. Must not have a number in front of it.

1-4 LET

At this point you do have enough information to write quite a few programs. However, another statement type that may be used to make life easier is the LET statement. The LET statement may be used to assign any number or any algebraic expression to any variable. Using a LET statement, the last program would look like this:

```
10 DATA 23.4,91.83,19.87,94.76,5.98,876.918
20 READ A,B
30 LET C=A*B
40 PRINT C
50 GOTO 20
60 END
RUN
```

```
2129.4
1577
8173
454.48
804168.
```

```
OUT OF DATA IN LINE 20
```

We obtain the same results as before. In this particular program, we really did not save anything. However, in any situation where we need to write the value of $A \times B$ several times or the expression is more involved, we will see that a saving may result. There are many things that you could not do without a LET capability.

LET

May be used to assign explicit values to a variable as `LET X = 4.56`, or may be used to assign algebraic expressions to a variable as `LET V = X * F + Y * G`. *Note:* All variables on the right-hand side must have been previously evaluated. On some computers LET is optional. Such systems permit `Z = 4.56`, for example.

1-5 INPUT

The INPUT statement serves much the same purpose as the READ statement in that it permits us to provide numbers for the computer to work with. For example, `100 INPUT A` will cause the computer to print a question mark and stop at line 100. The question mark is a signal to whoever is operating the terminal that he or she is to type the desired value for A on the keyboard and press the carriage return key to resume the run of the program. Likewise, `100 INPUT A, B, C` will call for three numbers separated by commas to be typed at the keyboard. It is advisable to have the computer print a label so that the operator can determine the nature of the numbers required. In the following program, note that the semicolon at the end of line 100 enables us to type the values for A and B on the same line as the printed label. The input numbers 15, 17 following the question mark were typed at the keyboard by the program operator.

```
100 PRINT "INPUT TWO NUMBERS:";
110 INPUT A,B
120 PRINT " THE NUMBERS ARE:";A;B
130 PRINT "   THEIR SUM IS:";A+B
140 PRINT "THEIR PRODUCT IS:";A*B
150 END
RUN
```

```
INPUT TWO NUMBERS: ?15,17
THE NUMBERS ARE: 15    17
THEIR SUM IS: 32
THEIR PRODUCT IS: 255

DONE
```

INPUT

Causes the computer to request data from the keyboard.

1-6 SAMPLE PROGRAMS

If we want the computer to obtain a decimal value for a compound fraction, there may be several programs that will do the job. Here we will have to use our knowledge of the order of operations as determined in algebra.

Three programs follow that find a decimal value for

$$\frac{2/5 + 3/7}{3/4 - 1/3}$$

```
10 LET N=2/5+3/7
20 LET D=3/4-1/3
30 PRINT N/D
40 END
RUN
```

1.98857

DONE

```
10 LET F=(2/5+3/7)/(3/4-1/3)
20 PRINT F
30 END
RUN
```

1.98857

DONE

```
10 PRINT (2/5+3/7)/(3/4-1/3)
20 END
RUN
```

1.98857

DONE

Parentheses serve as a powerful tool in grouping terms properly for the desired results. Keep in mind that priorities are exactly as they are in algebra and that if several operations of the same priority appear in the same line, they are executed from left to right.

Carefully study the programs which follow to see how the placement of the parentheses affects the results.

```
10 PRINT "3/5/3/5="; 3/5/3/5
20 PRINT "3/(5/3/5)="; 3/(5/3/5)
30 PRINT "3/5/(3/5)="; 3/5/(3/5)
40 PRINT "(3/5)/(3/5)="; (3/5)/(3/5)
50 PRINT "(3/5/3)/5="; (3/5/3)/5
60 PRINT "(3/5)/3/5="; (3/5)/3/5
70 END
RUN
```

3/5/3/5= .04

3/(5/3/5)= 9.

3/5/(3/5)= 1

(3/5)/(3/5)= 1

(3/5/3)/5= .04

(3/5)/3/5= .04

DONE

```
10 PRINT "A="; 2+3+1+3+2+1
20 PRINT "B="; 2+(3+1)+3+2+1
30 PRINT "C="; 2+3+(1+3)+2+1
40 PRINT "D="; 2+3+1+3+(2+1)
50 PRINT "E="; 2+(3+1+3)+2+1
60 END
RUN
```

8 Basic BASIC

```
A= 19
B= 26
C= 25
D= 36
E= 16385
```

DONE

It is important to know the capacity of the computer you are working with. Notice that according to the computer, $(2/5 + 3/7)/(3/4 - 1/3) = 1.98857$. If we work that out longhand, the result would be 1.98857142. BASIC provides from 6 to 15 digits, if they are needed, depending on the computer, with the last digit rounded off in decimal numbers, if it is the capacity digit.

If the results require more than the digit capacity of the computer, the computer prints in scientific notation as follows:

```
10 LET A=98781.
20 LET A1=8976
30 LET P=A*A1
40 PRINT A,"*",A1,"=",P
50 END
RUN
```

```
98781.      *      8976      =      8.86658E+08
```

DONE

The E + 08 means "times ten to the eighth power" and the decimal number is rounded off to the sixth digit. When the computer uses this notation, it is called *E-format*. Again we get large spaces using the comma to delimit the printed results. We will discuss this before we wind up chapter one.

A new item A1 appears in the above program in line 20. There you will find the statement LET A1 = 8976. The computer treats this as a new variable. In BASIC you may use any letter of the alphabet and any letter of the alphabet followed by a single digit as a variable. Some computers have additional simple variables. Thus a large number of variables are available.

Probably the best way to learn how the computer handles scientific notation is by experience. So, let us run a sample program to see what happens.

```
5 PRINT "X","Y","G","P","S"
10 DATA 1.31E+10,2.13E+11,1.16132E-05,2.83E+06
20 READ X,Y
26 LET G=X/Y
40 LET P=X*Y
50 LET S=X+Y
60 PRINT X,Y,G,P,S
65 GOTO 20
70 END
RUN
```

X	Y	Q	P	S
1.31000E+10	2.13000E+11	6.15023E-02	2.79030E+21	2.26100E+11
1.16132E-05	2.83000E+06	4.10360E-12	32.8654	2.83000E+06

OUT OF DATA IN LINE 20

Notice the use of Q for quotient, P for product, etc. This is a technique that is useful not only on the computer, but throughout mathematics.

Suppose you wish to write a program to find the total cost of a purchase in which there are different numbers of items at various prices, say 2 @ \$.35, 3 @ \$2.65, 11 @ \$.25, 1 @ \$9.49, and 35 @ \$1.59. We could have many more, but for a sample this should suffice. This program could of course be written in several ways, but here is one possibility:

```

10 PRINT "ITEMS","UNIT PRICE","COST","SUBTOTAL"
20 DATA 2,.35,3,2.65,11,.25,1,9.49,35,1.59
25 LET T=0
30 READ N,P
40 LET T=T+N*P
45 PRINT N,P,N*P,T
50 GOTO 30
70 END
RUN

```

ITEMS	UNIT PRICE	COST	SUBTOTAL
2	.35	.7	.7
3	2.65	7.95	8.65
11	.25	2.75	11.4
1	9.49	9.49	20.89
35	1.59	55.65	76.54

OUT OF DATA IN LINE 30

The single figure we set out to obtain is in the lower right-hand corner. The result is \$76.54; however, the other information is bound to be useful in at least some situations. Besides, even if we only print the right-hand column, we do not yet know how to dispose of the first four figures in that column. If you only want to print the right-hand column, then lines 10 and 45 may be altered thus:

```

10 PRINT "SUBTOTAL"
45 PRINT T

```

and only that column will be printed. Notice that line 10 is executed only once and line 45 is executed five times. The GOTO statement in line 50 only returns the computer back to line 30. So the computer only prints the headings once and only lets $T = 0$ once.

Still, in the last program, the combination of lines 25 and 40 may seem strange, but it will not as soon as you gain a little more insight into how the computer works. Line 25 is said to initialize the value of T at 0, i.e., give it an initial value of 0. When the computer executes the initializing statement, line

25 LET T = 0, it “says” that there is a location in the computer storage area which this program will call T and that this program also requires that the number zero be stored in that location for now. If we then say 26 LET T = 5, then the computer will put the number 5 in that location designated as T and zero will no longer be there. If we write a program that says 25 LET T = 0 followed by 26 LET T = T + 1, then the computer goes to the location where it is storing the value for T, “sees” 0, adds 1 to it, and returns the result to the location from which it just got 0, thereby replacing 0 (the old value) with 1 (the new value). So we see that in BASIC (as in other computer languages) = does not mean “two names for the same thing.” It means, instead, that the number on the right is to be placed in a location whose name is specified on the left. Thus we see that the equals sign as used here really specifies an operation for the computer to perform. So the equals sign is called an *assignment operator* or a replacement operator, and the LET statement is called the *assignment statement* or replacement statement.

Let us go through the program line by line. The lowest numbered line is a PRINT statement. So, right off, the computer prints the headings. Then it recognizes that the next statement is a DATA statement and ignores it. Line 25 assigns the value 0 to T. Then in line 30 the computer reads the first two numbers in the DATA line. Line 40 says that the previous value of T is to be taken out of storage and added to N times P. So, the first time through line 40, the value of T on the left will be 0 (from storage) plus the cost of two items at \$.35, or \$.70, and the computer returns the value .70 to the location in storage called T. Line 50 sends the computer back to read the next two numbers in the DATA line and to add their product (7.95) to .70 to get 8.65. It should be clear that we are printing the values of N, P, N times P, and T each time we read two new numbers. This process continues until the computer finds no more data. This causes the computer to terminate the RUN.

1-7 COMMA AND SEMICOLON IN PRINT STATEMENTS

Let us look at one more capability. In two of the programs of this chapter, the results were printed out with unnecessary great spaces. You may have noticed that we did not have these spaces in the two programs where semicolons were used in the PRINT statements. We have two delimiters, i.e., we have two signals that tell the computer how closely we want the results printed. The rules are a little complicated, but in general, the semicolon specifies closer spacing than the comma. The comma sets up zones across the page. The number of characters in the zones does vary from computer to computer, but 15 characters per zone is common. This zone width does not change with the number of digits in the numbers being printed. The semicolon sets up different sized zones depending on the number of digits in the number and whether it is in scientific notation. Here is the program from p. 8 again. First we run it. Then we insert a line which replaces the comma print delimiters with semicolon delimiters. And we call for another RUN.

```

10 LET A=98781.
20 LET A1=8976
30 LET P=A*A1
40 PRINT A,"*",A1,"=",P
50 END
RUN

```

```

98 781.      *              89 76      =              8.86658E+08

```

```

DONE
41 PRINT A;"*";A1;"=";P
RUN

```

```

98 781.      *              89 76      =              8.86658E+08

```

```

    98 781.      * 89 76      = 8.86658E+08

```

```

DONE

```

The output of this program is much more closely spaced. Notice that in the last line of the printing there is a space between the * and 8976. The computer leaves a space there for a + sign but does not print it. If the number printed were negative, then there would be a minus sign printed in that space. The same holds true for the space between the = and 8.86658E + 08. Also notice that in all program runs there is a space before the first number printed in any line if the number is positive. However, if we write 10 PRINT "3" in a program, then when we run the program, 3 will be printed in the very first space. This is because the computer treats things in quotes differently from the values of variables for printing purposes.

SUMMARY OF CHAP. 1

1) We now have the PRINT statement which puts results in readable form. It may be used for titles, headings, and labels.

2) Everything in quotes will be printed just as you type it (except more quotes).

3) Commas or semicolons may be used between the different items to be printed to control spacing.

4) The READ statement is used to read data. Several variables may be read with a single READ statement by separating them with commas, or they may be read with different READ statements. Just be sure the data is in proper order to match the READ variables.

5) The DATA statement supplies data for the READ statements. Discrete items of data must be separated with commas.

6) The LET statement may be used to assign any value or any algebraic expression to any variable.

7) The INPUT statement allows the operator to enter data from the keyboard in response to a question mark.

8) The GØTØ statement is used to alter the progress of the computer during the execution of a program.

9) The END statement may or may not be required. If required, it must carry the highest line number in the program.

10) The system commands to date are RUN and SCR or CLE. System commands must *not* be preceded by line numbers.

PROBLEMS FOR CHAP. 1*

1) Define the following items: BASIC, PRINT, END, READ-DATA, LET, RUN, GØTØ, statement, system command, program, remote terminal, comma delimiter, semicolon delimiter, scientific notation, initialize, and print zone.

2) What is the greatest number of variables permissible in a single BASIC program thus far?

3) Which of the following are valid BASIC variables? A, XI, 1B, XA, Y12.

4) The statement was made in Chap. 1 that you cannot have the computer print quotes by putting quotes inside quotes. Why not?

5) Write a program to add 2081, 682, 1161, and 72.03.

6) Write a program to add $1E6$ and $1E - 3$. Comment on the result.

7) Have the computer multiply $2E3$ by $1E - 1$.

8) Have the computer print a decimal value for $\frac{7}{8}$.

9) Modify the purchase program on p. 9 to total the number of items.

10) Write a program that will print the sum of the first 10 counting numbers. Put the numbers in as data.

11) Write a program that will print the product of the first 10 counting numbers.

✓ 12) Write a program that will multiply two binomials. In other words, for $(Ax + B)(Cx + D)$, you will put in data in groups of four numbers (A, B, C, D), and you want the computer to write out the three numbers that are coefficients in the product.

✓ 13) Have the computer print products of fractions by putting the numerators and denominators in as data and printing the numerator and denominator of the product as two numbers.

✓ 14) Do the same for adding fractions as in problem 13).

15) Have the computer print all possible arrangements of three digits using each once. Assign the digits in a DATA line and use semicolon spacing.

16) Write programs to print decimal values for the following:

$$(a) \quad \frac{\frac{1}{2} + \frac{1}{3}}{\frac{1}{3} - \frac{1}{4}}$$

$$(b) \quad \frac{2/3}{5/6} + \frac{3/4}{2/3}$$

$$(c) \quad \left(\frac{\frac{1}{2} + \frac{3}{7}}{2 \cdot 3^3 - 1} \right) \left(\frac{\frac{4^3 - 3^2}{5}}{11/4} \right)$$

$$(d) \quad \frac{(23.481 - 7.098)^4}{4.98^3 - 87.8^2}$$

* Check marks (✓) in front of problem numbers indicate the more difficult problems.

CHAPTER 2

Writing a Program

2-1 PLANNING

In Chap. 1 we looked at some programs and tried to analyze them, but we did not really go into the development of the programs themselves. Programs do not just happen, they do not appear whole. They are planned and developed with some considerable care. There are two important tools that we will be using to help us write programs. One is a new BASIC statement type, the REM statement. The other is flowcharting.

2-2 REM

XXX REM (REMark), where XXX is a line number in a BASIC program, notifies the computer that what follows is to be ignored during the RUN of the program. This means that you may write any message you like following REM. None of what you type has any effect on the execution of the program, but you may comment or remark upon the function of a particular line or a group of lines or the entire program.

REM

Permits the programmer to remark or comment in the body of his program.

EXAMPLE

```
118 REM THE NEXT THREE LINES PRINT THE FIRST SUM.  
9 REM THIS PRØGRAM ADDS PAIRS ØF NUMBERS.
```

2-3 FLOWCHARTING

Flowcharting, or block diagramming as it is sometimes called, is useful in planning programs in any computer language or for that matter in planning the solving of any problem, whether or not you are using a computer. We

introduce flowcharting by an example. Suppose we want to add the counting numbers from 1 to 50 including 1 and 50. We will need two variables: one for counting and the other to keep track of the sum. We want to start the counting variable at 1 and the summing variable at 0. Then for every value of the counting variable we want to add the counting variable to the old value of the summing variable to get a new value of the summing variable. Figure 2-1 represents a rough flowchart for such a process.

Figure 2-1 attempts to break the problem into its most fundamental steps. By using a diagram of this kind, we are able to show the direction we must follow to do the problem. We would like to have each step small enough for the computer to handle with one BASIC statement. However, this will not always be practical. In our example, though, it will be both practical and reasonable to have each step be a BASIC statement. With that in mind we redraw the diagram using statements more nearly like those in BASIC language. At the same time we will introduce the more standard practice of having different shapes for boxes that indicate different kinds of functions. The shapes used for this example are listed in Fig. 2-2 and the new flowchart is Fig. 2-3(A).

This time we are very close to being able to write the program directly from the flowchart. Of the statements in Fig. 2-3(A), the only one for which we do not yet have a corresponding BASIC language statement is decision-making. BASIC has a statement type that allows us to alter the path of the computer through a program depending on whether an algebraic sentence is true or false.


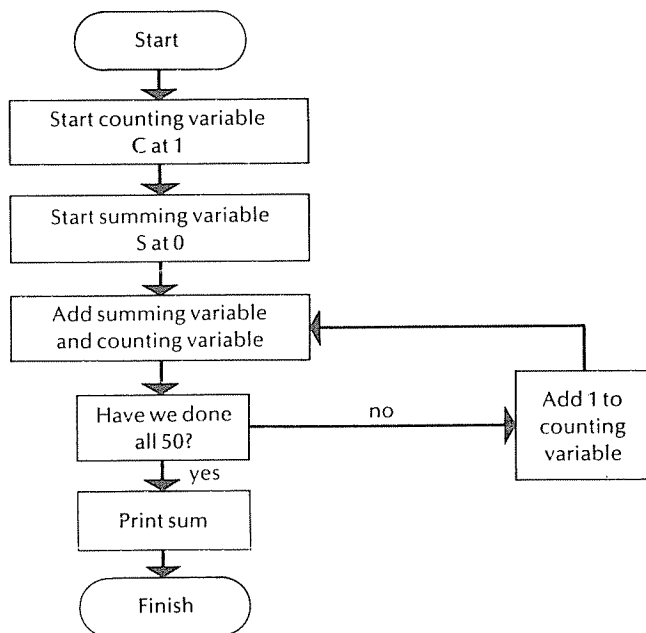


Fig. 2-1. Diagram for adding counting numbers from 1 to 50.

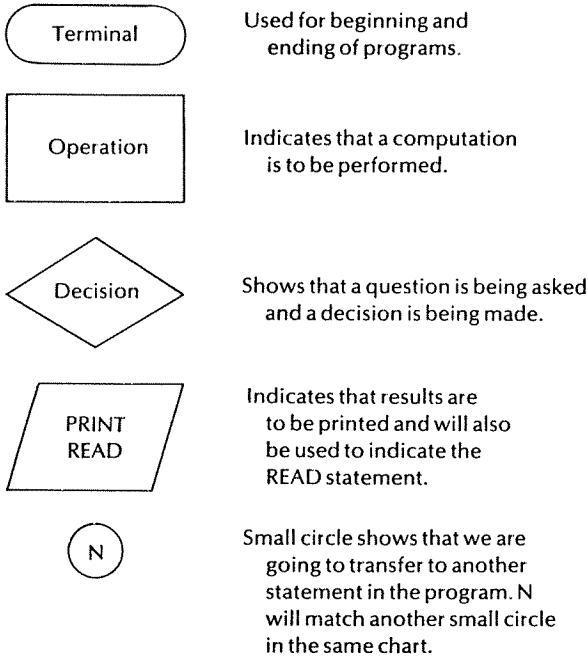

Arrowheads will indicate direction in all cases.

Fig. 2-2. First five shapes used for flowcharting.

2-4 IF-THEN

XXX IF $Z = Q$ THEN 230 means that if Z does equal Q , then the next line to be executed is line number 230. If Z does not equal Q , then the computer is directed to simply execute the line with the next number after XXX.

The equals sign appears in the IF-THEN statement. Used here the equals sign is clearly not the assignment operator we defined earlier. In the IF-THEN statement the equals sign specifies a required relation (mathematical equality) to exist between two numbers. Therefore, the equals sign is now designated as a relational operator.

With the IF-THEN statement added to our growing list of BASIC statements, we should be able to write the program directly from the flowchart. See Fig. 2-3(B). If we simply copy the program in Fig. 2-3(B) and run it, it looks like the program below.

```

10 LET C=1
20 LET S=0
30 LET S=S+C
40 IF C=50 THEN 70
50 LET C=C+1
60 GOTO 30
70 PRINT S
80 END
RUN

```

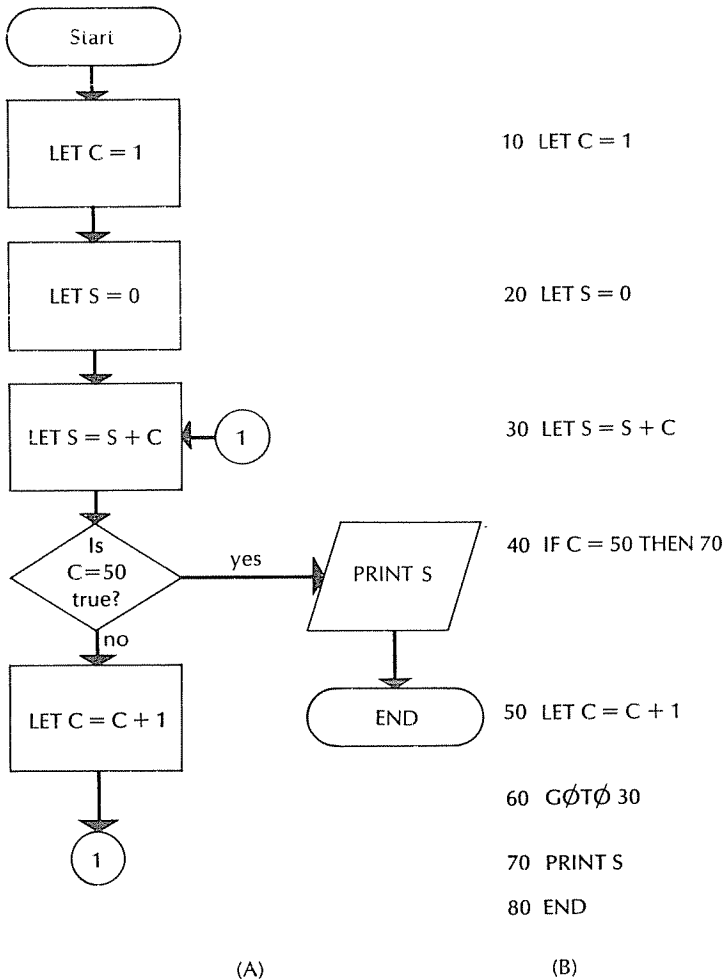


Fig. 2-3. (A) Flowchart for adding counting numbers 1 to 50. (B) Program written from flowchart.

BASIC allows us to give programs names. This requires a system command and will vary with the system tied in with your terminal. Some systems use the command NAME-, while others use NAME without the hyphen. After the system command, you type the name to be used. Being able to name programs will be helpful to us here as we will be able to refer to programs by name from now on.

We will give the last program a name, insert some REM statements to explain the function of certain lines, and add a label to make the printed result clearer. It is always recommended that you write programs with the thought that someone else will be reading them and you may not be there to do the explaining. You may even find that you cannot understand your own

```

SUM1

3  REM THE EXECUTIVE PROGRAM ALLOWS US TO GIVE OUR PROGRAM A
   NAME
5  REM THE RESTRICTIONS ON NAMES VARY FROM SYSTEM TO SYSTEM
8  REM *****
9  REM WE ARE ADDING INTEGERS ONE THROUGH 50 IN THIS PROGRAM
10 LET C=1
20 LET S=0
30 LET S=S+C
38 REM HAVE WE ADDED 50 (THE LAST NUMBER TO BE ADDED) YET?
40 IF C=50 THEN 70
48 REM WE HAVEN'T ADDED 50 YET *** SO WE ADD ONE
50 LET C=C+1
60 GOTO 30
68 REM WHEN C=50 WE PRINT S (THE SUM) IN LINE 70
70 PRINT S
80 END
RUN
SUM1

1275

DONE
70 PRINT "THE SUM OF THE INTEGERS FROM ONE TO FIFTY IS";S
RUN
SUM1

THE SUM OF THE INTEGERS FROM ONE TO FIFTY IS 1275

DONE

```

programs several weeks after you write them, unless they have good REM statements. See SUM1.

Let us do another program, similar to SUM1, where we will add all the odd integers from 5 through 1191. This time instead of starting the counting variable at 1, we will have to start it at 5. Since we are only interested in odd numbers, we will have to add 2 instead of 1 each time we add the new number to the summing variable. We will test N (the number added) each time through the summing step to decide whether we have reached the desired number, in this case 1191. First we draw the flowchart in Fig. 2-4. This flowchart is very much like the one in Fig. 2-3(A). See SUM2. Again, of

```

SUM2

10 LET N=5
20 LET S=0
28 REM LINE 30 ADDS THE NEW NUMBER TO THE SUMMING VARIABLE.
30 LET S=S+N
40 IF N=1191 THEN 70
48 REM ADD 2 IN LINE 50 FOR ODD NUMBERS
50 LET N=N+2
60 GOTO 30
70 PRINT "SUM OF ODD NUMBERS FROM 5 TO 1191 IS";S
80 END
RUN
SUM2

SUM OF ODD NUMBERS FROM 5 TO 1191 IS 355212.

DONE

```

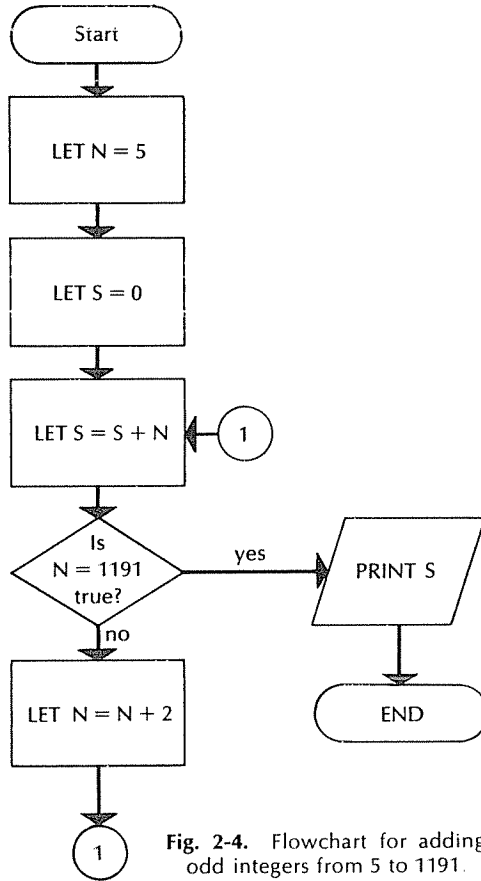


Fig. 2-4. Flowchart for adding odd integers from 5 to 1191.

course, we use the IF-THEN statement, because we have to decide each time we add 2 whether or not we have reached 1191.

The IF-THEN instruction is called a *conditional transfer*. Unless instructed otherwise, the computer executes the statements of the program in numerical order. The IF-THEN statement allows us to tell the computer to alter that order of execution on the condition that an algebraic sentence is true. If the algebraic sentence is false, then the computer passes to the next line in sequence. On the other hand, the GOTO statement is an *unconditional transfer*.

IF-THEN

XXX IF YYYYYY THEN ZZZ. If YYYYYY is true, transfer to line ZZZ. If YYYYYY is false, pass to the next line after XXX.

You may have more than one conditional transfer in the same place in a program. This would be necessary if you wanted to test for several conditions. Suppose in SUM2 you want to see the sum several times during the RUN. Let us look at the sum for the first two, for $N = 731$, and the last two.

First we should draw a new flowchart. It is clear from the flowchart that we have to decide each time we print the sum whether or not we have finished or have to add 2 and take the sum again. See Fig. 2-5 and SUM3.

Note that we test N for three relations: 1) "less than 9," 2) "equals 731," and 3) "greater than 1188." We have already seen the equals sign used as a relational operator. The two new relational operators "less than" ($<$) and "greater than" ($>$) are introduced here.

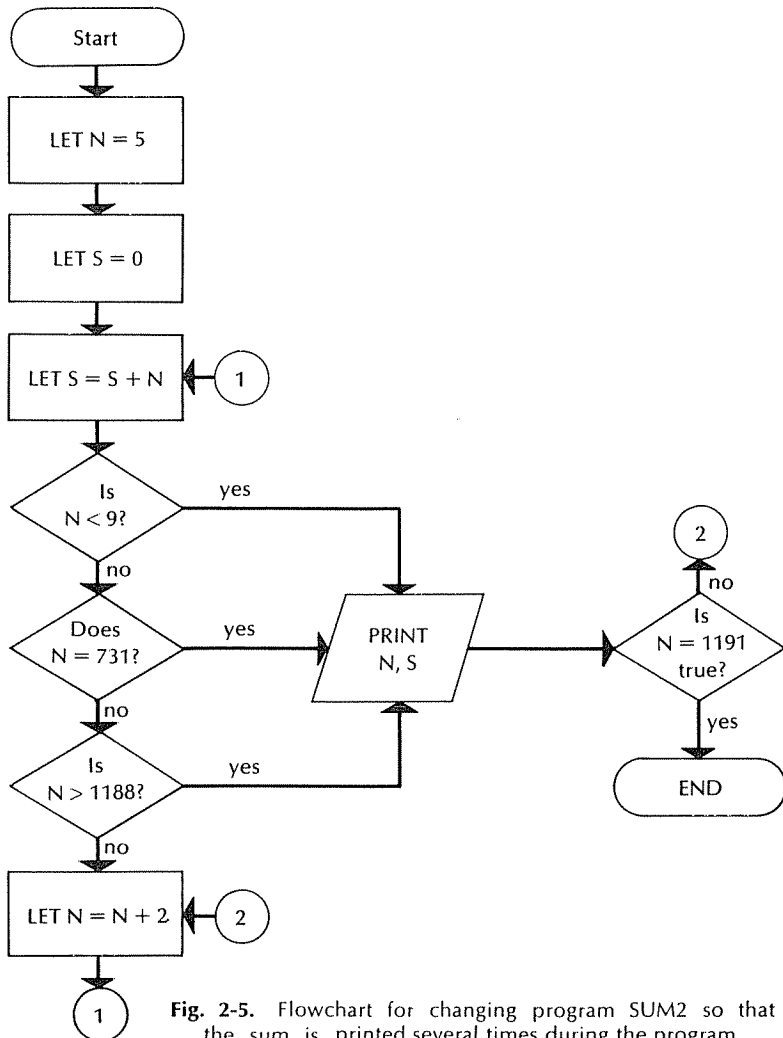


Fig. 2-5. Flowchart for changing program SUM2 so that the sum is printed several times during the program.

20 Basic BASIC

SUM3

```
5 PRINT "SUM OF ODD"
6 PRINT "NUMBERS FROM"
7 PRINT "FIVE TO", "IS"
10 LET N=5
20 LET S=0
28 REM LINE 30 ADDS THE NEW NUMBER TO THE SUMMING VARIABLE.
30 LET S=S+N
40 IF N<9 THEN 90
50 IF N=731 THEN 90
60 IF N>1188 THEN 90
68 REM ADD 2 IN LINE 70 FOR ODD NUMBERS
70 LET N=N+2
80 GOTO 30
90 PRINT N,S
100 IF N<1191 THEN 70
110 END
RUN
SUM3
```

```
SUM OF ODD
NUMBERS FROM
FIVE TO      IS
5             5
7             12
731          133952.
1189         354021.
1191         355212.
```

DONE

Other relational operators are “less than or equal to” ($\leq$), “greater than or equal to” ($\geq$), and “not equal to” ($\neq$). Some time-sharing systems require a set of alphabetic relational operators (such as EQ for $=$) instead of the symbols listed above.

Some facts about flowcharts should be becoming clearer. Arrowheads along connecting lines show the direction the computer is to follow. Rectangles and parallelograms have only one exit arrow, but they may have more than one entrance arrow. Diamonds have two exit arrows. Can diamonds have more than one entrance arrow?

We said previously that we did not know how to eliminate some of the printing in the SUBTOTAL column. Look at the purchase program on p. 9 again. We had no way of preventing the computer from running out of data. Now we can simply tack on some artificial data at the end of the DATA line, which could not possibly be data in the problem, and use the conditional transfer to test each time data is read to see if the computer has read the artificial data. If the computer has read the artificial data, then we do not want to use it; but we have a signal for the computer that it is time to print the total and terminate the run without reading any more data. Artificial data used in this way is called *dummy data*. If we are talking about prices and numbers of items, we can use 0 or negative numbers for dummy data. Let us use 0 for the number of items and 0 for the price and name the program TOTAL. See the flowchart in Fig. 2-6.

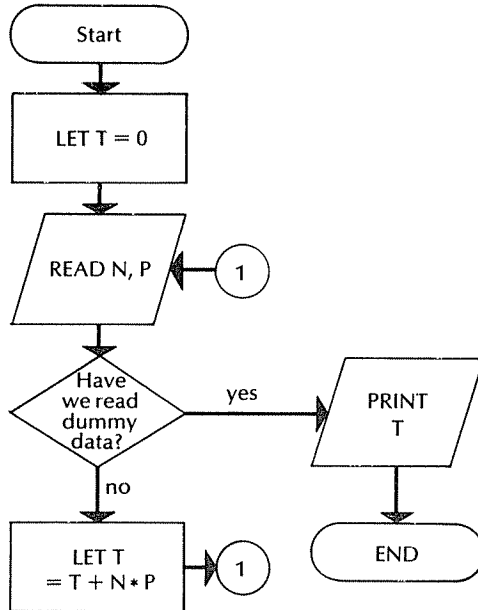


Fig. 2-6. Flowchart for using dummy data in program TOTAL.

TOTAL

```

5  REM THIS PROGRAM IS A MODIFICATION OF A PROGRAM THAT WE DID
   BEFORE.
10  PRINT "TOTAL COST = $";
20  DATA 2,.35,3,2.65,11,.25,1,9.49,35,1.59,0,0
21  REM THE DUMMY DATA IN THIS DATA LINE IS , ,
25  LET T=0
30  READ N,P
34  IF N=0 THEN 45
40  LET T=T+N*P
42  GOTO 30
45  PRINT T
70  END
RUN
TOTAL

```

TOTAL COST = \$ 76.54

DONE

Look at lines 10 and 45 and then look at the printed result. These two PRINT instructions are executed on the same printed line. This is accomplished by using the semicolon at the end of the PRINT instruction in line 10. The semicolon there tells the computer to wait after printing the \$ until it executes the next PRINT instruction in the program and to print that on the same line right after the \$. Again there is a single space for the plus sign which is not printed. If the number were negative, there would be a minus sign there.

SUMMARY OF CHAP. 2

1) We are now able to remark about a program right in the program itself by using REM. You should use REM statements so that whoever reads your program can determine what they are intended to do. It will also help you to remember your own programs weeks or months later when you yourself have forgotten what they will do.

2) Flowcharting will prove a very valuable process that we will use to develop programs to solve problems.

3) The ability to have the computer make decisions, using IF-THEN, and act according to the outcome of the decisions greatly increases the complexity of the problems we may solve by computer.

4) We now distinguish between conditional and unconditional transfer statements.

5) Dummy data may be used to gain a greater control over what we can ask the computer to do after it has read the last item of data.

PROBLEMS FOR CHAP. 2

Unless instructed otherwise, draw a flowchart for every problem that calls for a computer program to be written. Also use REM liberally.

1) Write a short description of each of the following terms: flowchart, dummy data, IF-THEN, REM, conditional transfer, unconditional transfer.

2) In the program TØTAL, why did we use two 0's for dummy data? Why couldn't we have used just one 0 since line 34 only tests to see if $N = 0$?

3) Bill took four tests. His marks were 100, 86, 71, and 92. What was his average score?

4) Modify the program SUM2 to count the number of odd numbers from 5 to 1191 by first modifying the flowchart.

5) Three pairs of numbers follow in which the first number is the base and the second number is the altitude of a triangle: 10, 21; 12.5, 8; 289, 114. Write a program to print in good form the base, the altitude, and the area for the three triangles.

6) Find the number of and the sum of all positive integers greater than 1000 and less than 2213 divisible by 11.

7) A man is paid 1¢ the first day on the job, 2¢ the second day, 4¢ the third day, and so on, doubling each day on the job for 30 days. You are to calculate his wages on the 30th day and his total for the 30 days.

8) Write a program to print the integers from 1 to 25 paired with their reciprocals.

9) Write a program to print the integers from 75 to 100 paired with their reciprocals.

10) Rewrite the program TØTAL to count the number of different items in the order and print the total.

11) A customer put in an order for four books which retail at \$5.95 and carry a 25% discount, three records at \$3.98 with a 15% discount, and one record player for \$39.95 on which there is no discount. In addition, there is a 2% discount allowed on the total order for prompt payment. Write a program to compute the amount of the order.

12) Write a program to balance a checkbook that includes the following transactions: Sept. 2, deposit \$9.00; Sept. 5, write a check for \$3.24; Sept. 10, write a

check for \$1.98; and Sept. 17, write a check for \$3.85. Assume that the balance was \$14.23 on Sept. 1. Have the computer print the balance after each transaction.

13) Write a program to find the amount of \$100.00 deposited for one year in a savings account at 4% per year compounded four times yearly.

✓ 14) In the song "The 12 Days of Christmas," gifts are bestowed upon the singer in the following pattern: the first day she received a partridge in a pear tree; the second day two turtle doves and a partridge in a pear tree; the third day three french hens, two turtle doves, and a partridge in a pear tree. This continues for 12 days. On the 12th day she received $12 + 11 + \dots + 2 + 1$ gifts. How many gifts were there all together?

✓ 15) For problem 14) have the computer print the number of gifts on each of the 12 days and the total up to that day.

✓ 16) George had test scores of 83, 91, 97, 100, and 89. Write a program to compute his average. Have the computer count how many tests George took.

✓ 17) Write a program that will take more than one set of test scores, find the average for each set, and print the result before going back to read the next set of scores.

CHAPTER 3

Loops and Lists

3-1 INTRODUCTION TO MACHINE-MADE LOOPS

A computer loop may be defined as a self-repeating sequence of program statements. This being true, loops are not new to us. Most of the programs we wrote in Chap. 2 used a loop. In those programs we initialized a variable with the idea that we would be adding a fixed number repeatedly and doing something each time we added the fixed number. Let us draw a flowchart and write a program to simply print the integers 1 through 6. See LØØP1 and Fig. 3-1.

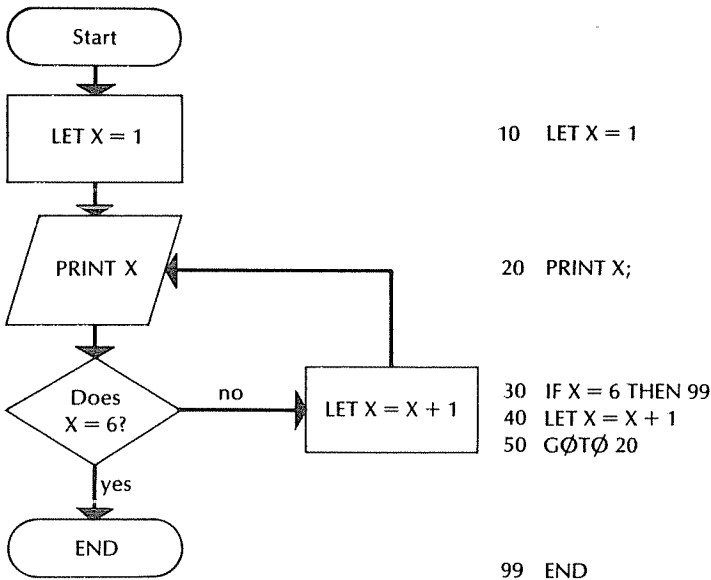


Fig. 3-1. Flowchart for LØØP1 for printing six integers.

```

L00P1

10 LET X=1
20 PRINT X;
30 IF X=6 THEN 99
40 LET X=X+1
50 GOTO 20
99 END
RUN
L00P1

1      2      3      4      5      6
DONE

```

In L00P1 we first print the number and then test to see if we have printed the last number in the sequence. If we have, then we stop. If we have not printed the last number, then we add 1 and print the new number. The results we obtain are entirely equivalent to the results we would get when we test to see if the number we are about to print is too great before we print it. If it is not too great, then we print it. If it is too great, then we stop. Consider the flowchart of Fig. 3-2 and L00P2.

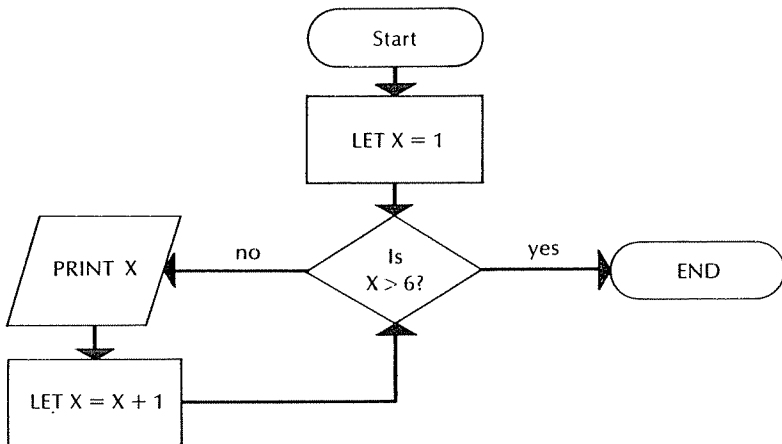


Fig. 3-2. Flowchart for L00P2 for testing X before it is printed.

```

L00P2

10 LET X=1
20 IF X>6 THEN 99
30 PRINT X;
40 LET X=X+1
50 GOTO 20
99 END
RUN
L00P2

1      2      3      4      5      6
DONE

```

FØR-NEXT

Loops are used so routinely in programming that BASIC provides a machine-made loop. Program LØØP3 is the machine equivalent of our program LØØP2.

Notice that the two statements 10 FØR X = 1 TØ 6 and 50 NEXT X in LØØP3 do the work of the four statements 10, 20, 40, and 50 in LØØP2. FØR X = 1 TØ 6 indicates doing everything between this statement and NEXT X, beginning with X = 1 and ending with X = 6. NEXT X tells the computer to add 1 to the old value of X and go to the beginning of the loop again. When X = 6, LØØP3 prints 6. After it prints 6, line 50 says NEXT X. This means, add 1 and go to the beginning of the loop. At this point in the RUN the value of X is 7, not 6 as you might think. Since 7 is greater than 6, the FØR-NEXT combination instructs the computer to execute the next instruction after NEXT X, which in program LØØP3 is END.

LØØP3

```
10 FØR X=1 TØ 6
30 PRINT X;
50 NEXT X
99 END
RUN
LØØP3
```

1	2	3	4	5	6
DØNE					

A machine loop does not have to begin with 1. It may begin wherever you require. The variable that is incremented in the machine loop may be treated in the same way as other variables in the program. However, you are warned against changing the value of that variable. LØØP3+, which is a modification of LØØP3, prints the values of X, 2 * X, X - 10, X + 3, and X / (-3).

LØØP3+

```
5 PRINT "X      2*X    X-10  X+3    X/(-3)"
10 FØR X=1 TØ 6
30 PRINT X;2*X;X-10;X+3;X/(-3)
50 NEXT X
99 END
RUN
LØØP3+
```

X	2*X	X-10	X+3	X/(-3)
1	2	-9	1	-.333333
2	4	-8	8	-.666667
3	6	-7	27	-1
4	8	-6	64	-1.33333
5	10	-5	125	-1.66667
6	12	-4	216	-2

DØNE

Notice lines 80, 100, 150, 220, 240, and 310 in program LUPDEM. They are all of the form XXX PRINT. This statement is sometimes called the *blank PRINT*. It has the effect of directing the computer to turn up a new

line of paper at the terminal. In some cases, XXX PRINT serves to begin a new line; in others, XXX PRINT results in a space between lines of printed output.

LUPDEM

```

10 REM **THIS PROGRAM IS INTENDED TO DEMONSTRATE SOME OF
20 REM **THE CAPABILITIES OF THE FOR-NEXT STATEMENT PAIR
30 REM
40 PRINT "50 FOR X=14 TO 20 PRODUCES THE FOLLOWING VALUES FOR X"
50 FOR X=14 TO 20
60 PRINT X;
70 NEXT X
80 PRINT
90 REM BASIC ALLOWS US TO INCREMENT A LOOP BY VALUES OTHER THAN ONE
100 PRINT
110 PRINT "120 FOR X=1 TO 19 STEP 2 PRODUCES;"
120 FOR X=1 TO 19 STEP 2
130 PRINT X;
140 NEXT X
150 PRINT
160 REM THE STEP NEED NOT INCREASE THE VALUE OF X
170 PRINT
180 PRINT "190 FOR X=345 TO 282 STEP -9 GIVES;"
190 FOR X=345 TO 282 STEP -9
200 PRINT X;
210 NEXT X
220 PRINT
230 REM DECIMALS ARE ALLOWED IN BASIC
240 PRINT
250 PRINT "260 FOR X=91.5 TO 3 STEP -15.7 YIELDS;"
260 FOR X=91.5 TO 3 STEP -15.7
270 PRINT X;
280 NEXT X
290 REM VARIABLES MAY BE USED TO SET UP A MACHINE LOOP IN BASIC
300 PRINT
310 PRINT
320 PRINT "330 LET A=5, 340 LET B=45, 350 LET C=6 AND"
325 PRINT "360 FOR V=A TO B STEP C GIVES THESE RESULTS;"
330 LET A=5
340 LET B=45
350 LET C=6
360 FOR V=A TO B STEP C
370 PRINT V;
380 NEXT V
390 END

```

RUN

LUPDEM

```

50 FOR X=14 TO 20 PRODUCES THE FOLLOWING VALUES FOR X
  14    15    16    17    18    19    20

120 FOR X=1 TO 19 STEP 2 PRODUCES;
  1      3      5      7      9     11     13     15     17     19

190 FOR X=345 TO 282 STEP -9 GIVES;
  345    336    327    318    309    300    291    282

260 FOR X=91.5 TO 3 STEP -15.7 YIELDS;
  91.5          75.8          60.1          44.4          28.7          13.

330 LET A=5, 340 LET B=45, 350 LET C=6 AND
360 FOR V=A TO B STEP C GIVES THESE RESULTS;
  5      11      17      23      29      35      41
DØNE

```

FØR-NEXT

FØR X = A TØ B STEP C sets up a machine loop with first number A, last number B, and increment C. See LUPDEM for detail.

Now we will look again at some of the programs in Chap. 2 and do them with a FØR-NEXT loop. Let us redo program SUM3 and call it SUM3+. Of course as we should expect, the printed results for SUM3+ are identical with those of SUM3. See the flowchart in Fig. 3-3.

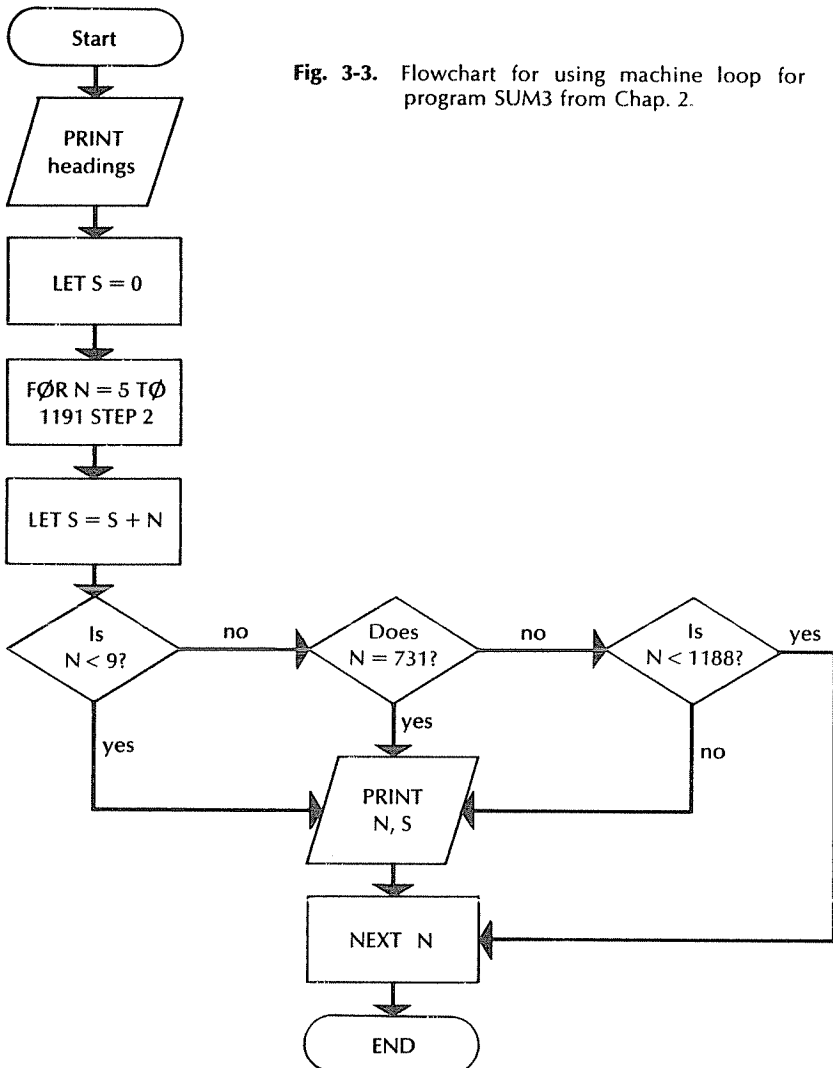


Fig. 3-3. Flowchart for using machine loop for program SUM3 from Chap. 2.

SUM3+

```

4  REM THIS PROGRAM IS A MODIFICATION OF SUM3 FROM CHAPTER TWO
5  PRINT "SUM OF ODD"
6  PRINT "NUMBERS FROM"
7  PRINT "FIVE TO","IS"
10 LET S=0
20 FOR N=5 TO 1191 STEP 2
28 REM LINE 30 ADDS THE NEW NUMBER TO THE SUMMING VARIABLE.
30 LET S=S+N
40 IF N<9 THEN 90
50 IF N=731 THEN 90
60 IF N<1188 THEN 100
90 PRINT N,S
100 NEXT N
110 END
RUN
SUM3+

```

```

SUM OF ODD
NUMBERS FROM
FIVE TO      IS
5             5
7             12
731          133952.
1189         354021.
1191         355212.

```

DONE

FØR-NEXT may be used to count the number of times the computer does a particular operation or a set of operations. For instance, we can use a machine loop to count the number of different items in program TØTAL of Chap. 2 and at the same time instruct the computer to read data repeatedly. We did not know how many items of data there were, but that does not matter. We can simply pick a number that we are sure is greater than the number of times we want the computer to read data. There could not possibly be more than say 50 items.

So in TØTAL+ we can use FØR X = 1 TØ 50. Then we can test for the dummy data each time data is read, using the conditional transfer to get the data out of the loop and to print the results, when N is 0.

TØTAL+

```

5  REM THIS PROGRAM IS A MODIFICATION OF A PROGRAM THAT WE DID
   BEFORE
20 DATA 2,.35,3,2.65,11,.25,1,9.49,35,1.59,0,0
21 REM THE DUMMY DATA IN THIS DATA LINE IS , ,
25 LET T=0
27 FOR X=1 TO 50
30 READ N,P
34 IF N=0 THEN 45
40 LET T=T+N*P
42 NEXT X
45 PRINT "TØTAL CØST = $";T;"THERE ARE";X-1;"DIFFERENT ITEMS"
70 END
RUN
TØTAL+

```

TØTAL CØST = \$ 76.54 THERE ARE 5 DIFFERENT ITEMS

DONE

Look carefully at line 45 in TØTAL+. This line gives the printing instructions. The counting loop calls for X to go from 1 to 50, but line 45 says print $X - 1$. Since X counts the number of times the READ statement is executed, 1 is added even when the dummy data is read; but we do not want to count the dummy data. So we have to tell the computer to subtract 1. An alternative method would be to use FØR X = 0 TØ 50. Then we could call for printing the value of X.

The same loop may be used several times in the same program. Every time the computer executes the FØR statement, the limits on the incremented variable are reestablished. Suppose in a group of five people each person took six tests. And we want to read their scores and find the average for each person. We can set up a loop FØR X = 1 TØ 6 and use this repeatedly until the computer runs out of data. The flowchart appears in Fig. 3-4 and we call the program AVG. Note that the flowchart of Fig. 3-4 contains no END box. This is because the computer runs out of data in the READ statement and termination is automatic. Notice in the program that each score is printed as it is read. This is one way of keeping track of whose average is being printed on each line in the printed results. Also note that each line of data is devoted to the scores for one person. This makes it easy to organize the typing of data.

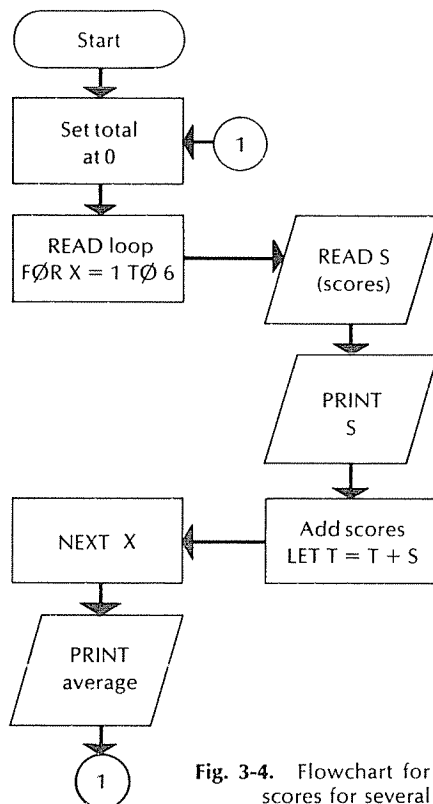


Fig. 3-4. Flowchart for averaging test scores for several people.

AVG

```

10 LET T=0
20 FOR X=1 TO 6
30 READ S
35 PRINT S;
40 LET T=T+S
50 NEXT X
60 PRINT "AVG="; T/6
68 REM WE SEND THE COMPUTER BACK TO LINE 10 TO SET T AT ZERO
   AGAIN
70 GOTO 10
80 DATA 65, 68, 73, 85, 82, 87
82 DATA 74, 87, 90, 88, 87, 88
84 DATA 88, 97, 91, 92, 90, 89
86 DATA 91, 83, 78, 89, 79, 87
88 DATA 65, 76, 67, 50, 60, 66
100 END
RUN
AVG

```

65	68	73	85	82	87	AVG= 76.6667
74	87	90	88	87	88	AVG= 85.6667
88	97	91	92	90	89	AVG= 91.1667
91	83	78	89	79	87	AVG= 84.5
65	76	67	50	60	66	AVG= 64

OUT OF DATA IN LINE 30

SUMMARY

We see that it is not necessary for us to construct repetitive operations. This may be done automatically with the FOR-NEXT statement pair in BASIC.

PROBLEMS FOR SEC. 3-1

Draw flowcharts for all programs unless instructed otherwise.

- 1) Add the counting numbers from 1 to 50 using FOR-NEXT.
- 2) Do problem 6) in Chap. 2 using a machine loop.
- 3) Do problem 7) in Chap. 2 with FOR-NEXT.
- 4) Do problem 8) in Chap. 2 using a machine loop.
- 5) Do problem 9) in Chap. 2 with FOR-NEXT.
- 6) Find the sum of the reciprocals of all the integers from 1 to 1000.
- 7) Find the sum of the reciprocals of the integers from 900 to 1000. Compare this number with the result of problem 6).
- 8) Do problem 13) in Chap. 2 using a machine loop.
- 9) Find the sum of the squares of the reciprocals of the integers from 1 to 1000.
- 10) If you were given \$1.00 today, \$2.00 tomorrow, \$3.00 the next day, and so on for 12 days, how many dollars would you have been given? Suppose this went on for 30 days. Then how much? Compare this with problem 3).

3-2 MORE ON LOOPS

In program AVG in Sec. 3-1, we went through the read and sum loop five times, once for each person's test data. When we have the computer do the same set of operations five times, we are actually using a loop. So let us rewrite AVG with a loop FOR P = 1 TO 5 and call it AVGCNG.

AVGCNG

```

5  FOR P=1 TO 5
10  LET T=0
20  FOR X=1 TO 6
30  READ S
35  PRINT S;
40  LET T=T+S
50  NEXT X
60  PRINT "AVG="; T/6
70  NEXT P
80  DATA 65, 68, 73, 85, 82, 87
82  DATA 74, 87, 90, 88, 87, 88
84  DATA 88, 97, 91, 92, 90, 89
86  DATA 91, 83, 78, 89, 79, 87
88  DATA 65, 76, 67, 50, 60, 66
100 END
RUN
AVGCNG

```

65	68	73	85	82	87	AVG= 76.6667
74	87	90	88	87	88	AVG= 85.6667
88	97	91	92	90	89	AVG= 91.1667
91	83	78	89	79	87	AVG= 84.5
65	76	67	50	60	66	AVG= 64

DONE

Notice that the X loop is entirely within the P loop. Loops written in this way are called *nested loops*. They occur often in programming. Loops may be nested to almost any number you may require, but the loops must be completed from within. The FOR statements and the NEXT statements must be paired. Legal and nonlegal combinations are shown below.

Legal

```

FOR A=1 TO 8
FOR B=2 TO 7
FOR C=2.3 TO 6.1
NEXT C
FOR D=A TO B
NEXT D
NEXT B
NEXT A

```

Illegal

```

FOR A=1 TO 8
FOR B=2 TO 7
FOR C=2.3 TO 6.1
NEXT A
NEXT C
FOR D=A TO B
NEXT D
NEXT B

```

Suppose we want to calculate compound interest on \$2000 at 4% compounded quarterly for nine years. When you take your savings account book to the bank after the first of the year, it calculates the interest four times at 1% each time. In nine years you take the book to the bank nine times. This is an ideal example for nested loops. One loop goes from 1 to 9, with a loop inside going from 1 to 4. This provides a good computer model for the actual problem. As the program is written, it is a simple matter to have the principal printed at the end of each year. A line may be inserted between 50 and 60 to print the amount after each year. The program could also have been written using FOR X = .25 TO 9 STEP .25, or even FOR X = 1971.25 TO 1980 STEP .25. If you want to be able to do several problems at several interest rates, then substitute a variable, which may be assigned as data, for .01 in line 40. See CMPINT and Fig. 3-5.

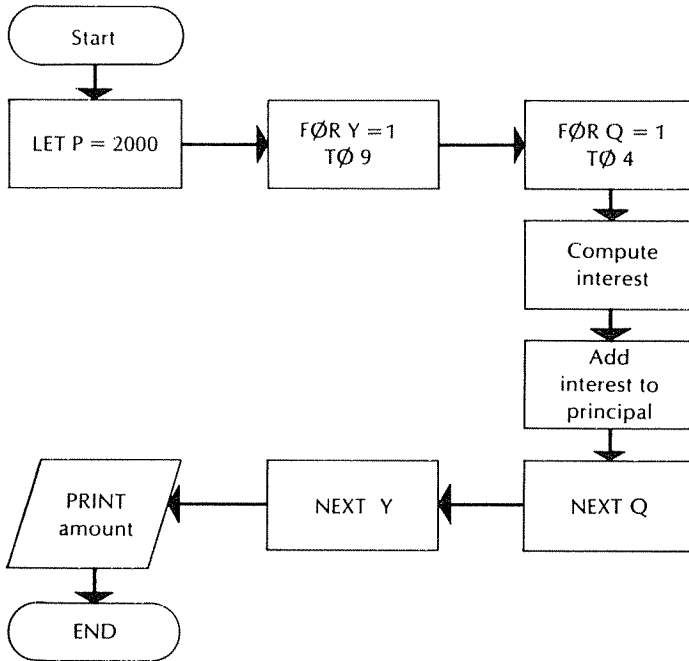


Fig. 3-5. Flowchart for finding the compound amount of \$2000 after nine years compounded quarterly.

CMPINT

```

8  REM  START THE PRINCIPAL P AT $2000
10 LET P=2000
18  REM  GØ FØR 9 YEARS
20  FØR Y=1 TØ 9
28  REM  GØ FØUR QUARTERS EACH YEAR
30  FØR Q=1 TØ 4
38  REM  CØMPUTE THE INTEREST FØR THIS QUARTER
40  LET I=.01*P
48  REM  ADD THE INTEREST TØ THE PRINCIPAL
50  LET P=P+I
52  REM *** WE CCULD HAVE USED LET P=P+.01*P HERE
60  NEXT Q
62  REM AFTER FØUR QUARTERS THE CØMPUTER GETS TØ NEXT Y
70  NEXT Y
80  PRINT "AFTER 9 YEARS THE AMOUNT IS $";P
90  END
RUN
CMPINT

```

AFTER 9 YEARS THE AMOUNT IS \$ 2861.54

DØNE

We may want to have the limits of one loop determined by the variable in another loop. For instance, we can print a triangle of numbers in which each row prints all of the counting numbers up to and including the row number.

We need one loop for rows and another for columns. We want the number of columns to go from 1 to the row number. This is accomplished by program TRAGL. Now you can do problem 14) in Chap. 2 very easily. (Of course you could do the problem before, but it took a longer program.)

TRAGL

```
10 FOR R=1 TO 10
20 FOR C=1 TO R
30 PRINT C;
40 NEXT C
50 PRINT
60 NEXT R
70 END
```

RUN

TRAGL

```
1
1 2
1 2 3
1 2 3 4
1 2 3 4 5
1 2 3 4 5 6
1 2 3 4 5 6 7
1 2 3 4 5 6 7 8
1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8 9 10
```

DONE

SUMMARY

Loops may be nested inside other loops as long as we see to it that operations are done from within, much the same as we deal with sets of parentheses within other sets of parentheses in algebraic expressions. There may be as many loops within other loops as the problem may require up to a point. The limits of one loop may be set by the variables of other loops. Caution is urged against inadvertently changing the loop variable within the loop, although we may use its value for any purpose.

PROBLEMS FOR SEC. 3-2

1) In TRAGL we printed from 1 to the row number. Write a program to print from the row number to 10 for ten rows.

2) Print the multiplication table up to 12×12 .

3) Print the addition table up to $12 + 12$.

4) Find the compound interest on \$1000 at 5% compounded quarterly for 10 years. Print the amount after each year with the year number.

5) In problem 4), have the computer print the interest cumulatively each year.

6) Print a table showing compound interests on \$1000 for one, two, three, and four years at 4%, 4½%, 5%, and 5½% compounded quarterly. Print year 1 through 4 at the top, and put the interest rate in the first column of each row. Put the rate in a loop `FOR R = 4 TO 5.5 STEP .5`.

7) Redo problem 14) in Chap. 2 using nested loops.

✓ 8) Write a program to read 10 numbers from data, find the largest number, print it and the position it occupied in the data line. This requires only one loop, but you will have to read the first number directly from data outside the loop and then have the loop begin with 2 to read the rest of the data. (This is essentially a problem of storing values.)

✓ 9) Write a program to print all sets of three integers less than 20 so that they can be the sides of a right triangle. Print no duplications, i.e., if you have the computer print 3, 4, 5, do not print 4, 3, 5.

10) Write a program to print the integers 1 through 50 in order in 5 rows of 10 columns each.

11) Write a program to print the integers 1 through 50 in order in 10 rows of 5 columns each.

✓ 12) Print a table of the squares of positive integers 1 through 29. Label the columns 0 through 9 and the rows 0, 10, and 20. Make the entry in the table be the square of the sum of the row and column labels.

13) Have the computer print the product and the sum of all possible different pairs of integers from 15 to 20.

3-3 INTRODUCTION TO LISTS

Recall that in Chap. 1 it was stated that when a program specifies a variable, the computer sets up a location with the variable as its name. This provides a means for the computer to store numbers for later use. You are about to meet a very powerful extension of that concept, the *computer list*. A computer list sets up not a single location for a variable, but many locations for a variable. If we use the computer for a list of say four items (we may have many more) and choose to call it L, the different locations of the list will be L[1], L[2], L[3], and L[4]. If we want the list to contain the numbers 4, 9, -92, and 8, this could be accomplished by saying LET L[1] = 4, LET L[2] = 9, LET L[3] = -92, and LET L[4] = 8. The numbers in brackets may be thought of as subscripts and they designate at which location of the L list the number is being stored. However, the LET statement with explicit subscripts is not really any better than assigning a different variable for each number. So values are usually assigned in a loop with the subscript being the variable in the loop. In the demonstration program LIST1 we are letting S go from 1 to 4 and reading L[S] from data. There may be several lists in the same program. Any letter of the alphabet may be used to designate a list. At this point we are limited to 10 or 11 items in a list, depending on the computer. If we have 10, they are numbered 1 through 10. Some computers start at 0.

As you can see from the RUN of LIST1, we may use any or all of the numbers in a list. We can print them forwards or backwards. We can rearrange them at will. We may look at the numbers in any identifiable manner. Lists are incredibly useful when you learn to handle them.

Let us use lists and loops to write all possible combinations of four digits in one list taken in pairs with four digits in another list. First we draw a flowchart as in Fig. 3-6. We call the program PAIRS.

LIST1

```

8  REM  WE ARE READING FOUR ITEMS OF DATA WITH A LOOP
10  FOR S=1 TO 4
20  READ L(S)
30  NEXT S
38  PRINT "WE CAN PRINT THE ITEMS OF THE LIST EXPLICITLY"
40  PRINT "L(1) L(2) L(3) L(4)"
50  PRINT L(1);L(2);L(3);L(4)
60  PRINT
70  PRINT "WE CAN ALSO USE A LOOP.  THE LONGER THE LIST THE
    BETTER"
80  PRINT "BEING ABLE TO USE A LOOP IS"
90  FOR X=1 TO 4
100  PRINT L(X);
120  NEXT X
130  PRINT
135  PRINT
140  PRINT "WE CAN OPERATE ON THE NUMBERS IN THE LIST"
145  PRINT "  B  L(B) B*L(B)"
150  FOR B=1 TO 4
155  PRINT B;L(B);B*L(B)
160  NEXT B
170  PRINT
180  PRINT "WE CAN PRINT THE LIST BACKWARDS WITH FOR X=4 TO 1
    STEP -1"
190  FOR X=4 TO 1 STEP -1
200  PRINT L(X);
210  NEXT X
220  PRINT
225  PRINT
230  PRINT "WE CAN RELOCATE ITEMS IN THE LIST"
240  PRINT "250 LET Z=L(1), 260 LET L(1)=L(2) AND 270 LET
    L(2)=Z"
245  PRINT "GIVE THE FOLLOWING RESULT"
250  LET Z=L(1)
252  REM **HERE WE ARE STORING THE VALUE OF L(1) IN Z
260  LET L(1)=L(2)
262  REM  WE HAVE PUT THE VALUE OF L(2) INTO L(1)
270  LET L(2)=Z
272  REM  HERE THE OLD VALUE OF L(1) IS PUT INTO L(2) FROM Z
280  PRINT "L(1) =";L(1)
290  PRINT "L(2) =";L(2)
300  PRINT "LOOK CAREFULLY AT THE ORIGINAL LIST"
310  PRINT "WE HAVE EXCHANGED ITEMS ONE AND TWO"
320  PRINT
330  PRINT "WE CAN PUSH EVERY NUMBER UP FOUR LOCATIONS IN THE
    LIST"
340  FOR P=1 TO 4
350  LET L(P+4)=L(P)
360  NEXT P
370  FOR N=1 TO 8
380  PRINT L(N);
390  NEXT N
500  DATA 4,9,-92,8
9999  END

```

```

RUN
LIST1

```

```

WE CAN PRINT THE ITEMS OF THE LIST EXPLICITLY
L(1) L(2) L(3) L(4)
  4      9     -92    8

```

WE CAN ALSO USE A LOOP. THE LONGER THE LIST THE BETTER
BEING ABLE TO USE A LOOP IS

4 9 -92 8

WE CAN OPERATE ON THE NUMBERS IN THE LIST

B	L[B]	B*L[B]
1	4	4
2	9	18
3	-92	-276
4	8	32

WE CAN PRINT THE LIST BACKWARDS WITH FOR X=4 TO 1 STEP -1
8 -92 9 4

WE CAN RELOCATE ITEMS IN THE LIST

250 LET Z=L[1], 260 LET L[1]=L[2] AND 270 LET L[2]=Z

GIVE THE FOLLOWING RESULT

L[1] = 9

L[2] = 4

LOOK CAREFULLY AT THE ORIGINAL LIST

WE HAVE EXCHANGED ITEMS ONE AND TWO

WE CAN PUSH EVERY NUMBER UP FOUR LOCATIONS IN THE LIST

9 4 -92 8 9 4 -92 8

DONE

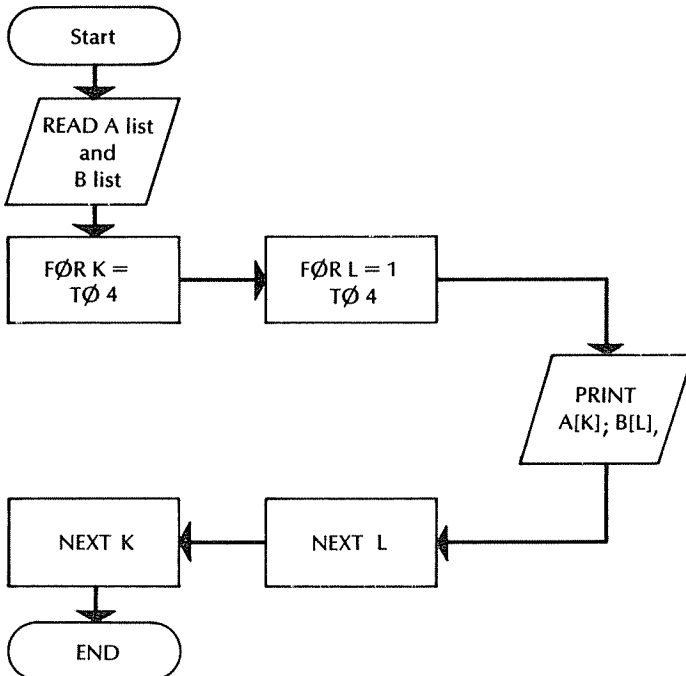


Fig. 3-6. Flowchart for program PAIRS for printing all combinations from two four-item lists.

PAIRS

```

10 REM 20 TO 40 READ THE A LIST
20 FOR I=1 TO 4
30 READ A[I]
40 NEXT I
45 REM 50 TO 65 READ THE B LIST
50 FOR J=1 TO 4
60 READ B[J]
65 NEXT J
67 REM HERE IS ANOTHER NESTED LOOP
70 FOR K=1 TO 4
80 FOR L=1 TO 4
90 PRINT A[K];B[L],
91 REM *** NOTICE THE USE OF THE SEMICOLON AND THE COMMA
100 NEXT L
110 PRINT
120 NEXT K
500 DATA 1,3,5,7
510 DATA 2,3,6,9
999 END
RUN
PAIRS

```

1	2	1	3	1	6	1	9
3	2	3	3	3	6	3	9
5	2	5	3	5	6	5	9
7	2	7	3	7	6	7	9

DONE

SUMMARY

The computer list has been introduced. A list is like a subscripted variable in that it takes on different values according to the subscript. Each of the numbers in a list is a variable unto itself. It may be handled in the same way that any of our previous variables may be handled. The numbers in a list may be rearranged. In order to exchange two numbers in a list, we first have to store one of them in another variable.

PROBLEMS FOR SEC. 3-3

1) Using one READ statement in a loop, prepare a nine-element list using the following numbers: 6, -89, 200, 31, 999, -999, 0, 1, and 18. Print out the list across the page first in the order given, then in reverse order.

2) Fill a 10-element list with the squares of the subscripts. Print the element number and the listed value in order in two columns down the page.

3) Prepare a 10-element list using the following numbers: 17, 18, 281, -722, 0, -5, -16, 11, -1, and 10. Find the largest number in the list and its location. Print them. Then exchange the largest number with the first element in the list and print the new list with a loop.

4) Prepare one list with the numbers 6, 4, 11, 51, and 17 and another with 51, 12, 11, and 16. Now print all possible pairs using one number from each list.

5) Repeat problem 4), without printing a pair if the numbers are the same.

6) Redo program TOTAL in Chap. 2 using an N list for numbers of items and a P list for prices. Instead of $N * P$ use $N[I] * P[I]$.

7) Prepare one list with the numbers 6, 11, 15, 17, 26, and 83 and another with 15, 19, 27, 83, and 91. Have the computer form a new list that contains only those numbers that are in both lists.

8) Using the two lists given in problem 7), create a new list consisting of all numbers that appear in either list. If the number appears in both lists, enter it only once in the new list.

9) LET $F[1] = 1$ and LET $F[2] = 1$, then fill the next eight positions in F so that every entry is the sum of the previous two entries. Print the complete list. You have begun to form the sequence known as the Fibonacci numbers.

✓ 10) Form a 10-item list consisting of the first 10 positive odd integers in order. Form a second list so that each entry contains the sum of all the numbers in the first list up to and including the location number for the second list.

11) Prepare one list containing 6, 1, 3, 7, 2, and 9 and another containing 8, 2, 3, 9, 7, and 4. Form a third list containing the sums of the corresponding elements, i.e., $A[I] = F[I] + S[I]$.

12) Do problem 11), but enter the products in the third list.

✓ 13) Fill a four-element list with 9, 60, 700, and 3000. Fill a three-element list with 7, 30, and 200. Sum up the products of all possible pairs of numbers, one from each list.

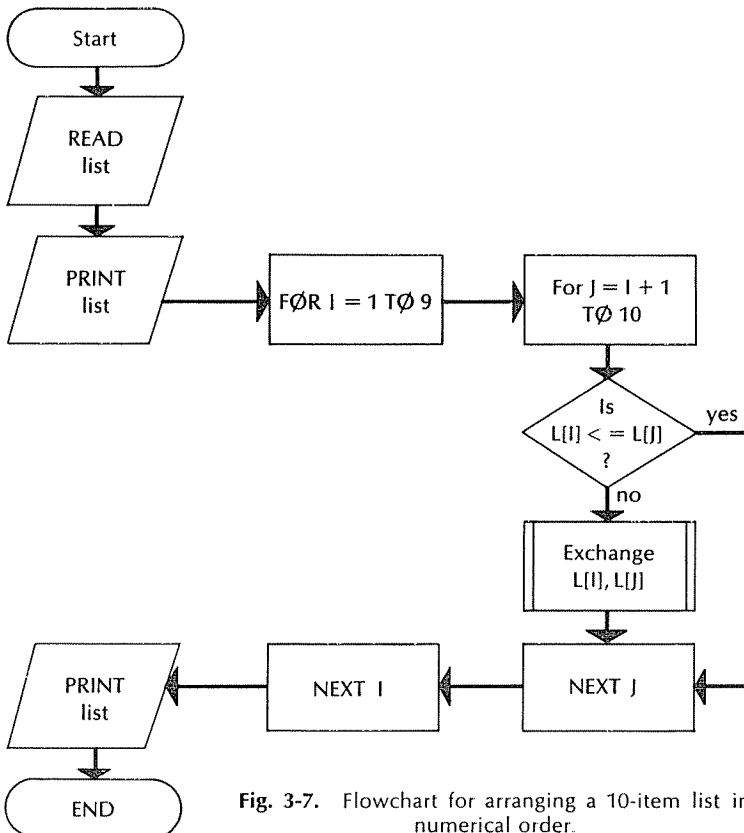


Fig. 3-7. Flowchart for arranging a 10-item list in numerical order.

3-4 MORE ON LISTS

We will now discuss the arrangement of a list in numerical order. If we look at every pair of numbers in a list of numbers and they are all in numerical order, then we are assured that the entire list is in order. Thus, we must instruct the computer to look at all the pairs and determine whether or not they are in order. If the pair is in numerical order, then we want the computer to look at the next pair. If it is not, then we want the computer to exchange the two numbers. We can accomplish this in the same manner as was done in program LIST1. In other words, we store one of the numbers in a new variable. Then we put the second variable's value into the first variable and the original value of the first variable into the second variable from the storage variable. The three statements look like this:

```
XXX LET S = L[I]
YYY LET L[I] = L[J]
ZZZ LET L[J] = S
```

ARANGE

```
10 REM WE ARE READING THE LIST FROM DATA
20 FOR X=1 TO 10
30 READ L[X]
40 NEXT X
50 PRINT "HERE IS THE LIST IN ORIGINAL ORDER"
60 FOR Y=1 TO 10
70 PRINT L[Y];
80 NEXT Y
90 PRINT
100 REM NOW WE TEST PAIRS OF NUMBERS TO SEE IF THEY ARE IN
    ORDER
110 FOR I=1 TO 9
118 REM WHY DON'T WE SAY FOR I=1 TO 10????
120 FOR J=I+1 TO 10
130 IF L[I] <= L[J] THEN 300
140 LET S=L[I]
150 LET L[I]=L[J]
160 LET L[J]=S
170 REM WE HAVE REVERSED TWO ELEMENTS OF THE LIST
180 REM **** SEE PROGRAM LIST1 ****
300 NEXT J
400 NEXT I
405 PRINT "AND HERE IS THE LIST IN ORDER FROM SMALLEST TO
    GREATEST"
410 FOR Y=1 TO 10
420 PRINT L[Y];
430 NEXT Y
500 DATA 6, -19, 28, 20, -32, 74, 19, 28, 23, 43
999 END
```

RUN

ARANGE

```
HERE IS THE LIST IN ORIGINAL ORDER
 6   -19   28   20   -32   74   19   28   23   43
AND HERE IS THE LIST IN ORDER FROM SMALLEST TO GREATEST
-32  -19    6   19   20   23   28   28   43   74
```

DONE

In flowcharting when we have a process of this kind, which has been used and clearly defined, we can avoid being explicit by using a shape to indicate a predefined process. The generally accepted shape is a rectangle with two additional vertical lines, which appears in the flowchart of Fig. 3-7 for program ARANGE that solves the problem we have just outlined.

In program ARANGE, the list is read in lines 20, 30, and 40. Then, for the purpose of seeing the list in the original order, it is printed immediately in lines 60, 70, and 80. In lines 110 and 120 two loops are set up, where the I loop represents the first number of the pair and the J loop represents the second number. As per line 118, why did we not let I go from 1 to 10? Had we done that, at some point in the program the computer would have to compare $L[10]$ and $L[10]$, which is not necessary. The first time through, $L[1] = 6$ and $L[2] = -19$. The first element is not less than or equal to the second. Thus, we want the computer to exchange these two elements. This is done by lines 140, 150, and 160. As the computer leaves line 160, $L[1] = -19$ and $L[2] = 6$. It is relatively simple for us to have the computer print the list every time it is necessary to exchange two elements of the list. All that is required is to insert four statements exactly like 60, 70, 80, and 90. This is done in program ARANG1 in lines 200, 210, 220, and 230. This means that the more numbers out of order, the more printing we might expect. Study the printing of ARANG1 carefully. Notice that after the first reversal, $L[1] = -19$ and $L[2] = 6$ as promised.

Look at the three sets of lines: 60, 70, 80, 90; 200, 210, 220, 230; and 410, 420, 430, 440. You should recognize that these three sets of lines are identical. BASIC provides a convenient program statement that allows us to type out that set of lines only once and then call that set of lines from anywhere in the program. The statement is GØSUB XXX, where XXX designates the first line of the set of lines you would like repeated. The set of program statements that is repeated is called a *subroutine*. When the computer encounters YYY GØSUB XXX, it initially behaves as it would for GØTØ XXX. However, the computer “remembers” where it was when it left YYY and will return to the next higher numbered line after YYY when it finishes the subroutine. In order to achieve this, the computer must “know” when it has completed the subroutine. You, the programmer, must notify the computer where the end is by inserting a line ZZZ RETURN at the end of the subroutine. Then the computer will “know” that it must go to the line immediately following the GØSUB XXX it most recently encountered.

GØSUB—RETURN

YYY GØSUB XXX sends the computer to line XXX to execute all lines it encounters until the RETURN statement, which sends the computer back to the line following YYY. GØSUB is especially useful in programs where the same set of lines is used several times.

ARANG1

```

10 REM WE ARE READING THE LIST FROM DATA
20 FOR X=1 TO 10
30 READ L[X]
40 NEXT X
50 PRINT "HERE IS THE LIST IN ORIGINAL ORDER"
60 FOR Y=1 TO 10
70 PRINT L[Y];
80 NEXT Y
90 PRINT
95 PRINT "HERE WE ARE ARRANGING THE LIST"
100 REM NOW WE TEST PAIRS OF NUMBERS TO SEE IF THEY ARE IN
    ORDER
110 FOR I=1 TO 9
118 REM WHY DON'T WE SAY FOR I=1 TO 10????
120 FOR J=I+1 TO 10
130 IF L[I] <= L[J] THEN 300
140 LET S=L[I]
150 LET L[I]=L[J]
160 LET L[J]=S
170 REM WE HAVE REVERSED TWO ELEMENTS OF THE LIST
180 REM **** SEE PROGRAM LIST! ****
200 FOR Y=1 TO 10
210 PRINT L[Y];
220 NEXT Y
230 PRINT
300 NEXT J
400 NEXT I
405 PRINT "AND HERE IS THE LIST IN ORDER FROM SMALLEST TO
    GREATEST"
410 FOR Y=1 TO 10
420 PRINT L[Y];
430 NEXT Y
440 PRINT
500 DATA 6,-19,28,20,-32,74,19,28,23,43
999 END
RUN
ARANG1

```

```

HERE IS THE LIST IN ORIGINAL ORDER
 6   -19   28   20  -32   74   19   28   23   43
HERE WE ARE ARRANGING THE LIST
-19    6   28   20  -32   74   19   28   23   43
-32    6   28   20  -19   74   19   28   23   43
-32   -19  28   20    6   74   19   28   23   43
-32   -19  20   28    6   74   19   28   23   43
-32   -19    6   28   20   74   19   28   23   43
-32   -19    6   20   28   74   19   28   23   43
-32   -19    6   19   28   74   20   28   23   43
-32   -19    6   19   20   74   28   28   23   43
-32   -19    6   19   20   28   74   28   23   43
-32   -19    6   19   20   23   74   28   28   43
-32   -19    6   19   20   23   28   74   28   43
-32   -19    6   19   20   23   28   28   74   43
-32   -19    6   19   20   23   28   28   43   74
AND HERE IS THE LIST IN ORDER FROM SMALLEST TO GREATEST
-32   -19    6   19   20   23   28   28   43   74

```

DONE

GOSUB

```

10 PRINT "THIS PROGRAM IS INTENDED TO DEMONSTRATE GOSUB'S
    BEHAVIOUR"
20 GOSUB 700
30 FOR X=1 TO 3
40 GOSUB 500
45 GOSUB 700
50 NEXT X
60 GOSUB 400
70 PRINT 70
75 GOSUB 700
80 GOSUB 400
90 PRINT 90
95 GOSUB 700
100 LET X=4
110 GOSUB 500
115 GOSUB 700
120 GOSUB 400
130 PRINT 130
135 GOSUB 700
140 GOSUB 600
150 PRINT 150
155 GOSUB 700
399 GOTO 999
400 PRINT "HERE WE ARE AT LINE";
410 RETURN
500 PRINT "THIS IS GOSUB 500";X;"TIMES"
510 RETURN
600 PRINT "CALL GOSUB 400 FROM GOSUB 600"
610 GOSUB 400
620 RETURN
700 PRINT
710 RETURN
999 END
RUN
GOSUB

```

THIS PROGRAM IS INTENDED TO DEMONSTRATE GOSUB'S BEHAVIOUR

THIS IS GOSUB 500 1 TIMES

THIS IS GOSUB 500 2 TIMES

THIS IS GOSUB 500 3 TIMES

HERE WE ARE AT LINE 70

HERE WE ARE AT LINE 90

THIS IS GOSUB 500 4 TIMES

HERE WE ARE AT LINE 130

CALL GOSUB 400 FROM GOSUB 600

HERE WE ARE AT LINE 150

DONE

Let us look at a demonstration program before we use GOSUB in ARANG1. Go through program GOSUB line by line to be sure you see what has happened. Line 10 is reasonably clear. Line 20 says GOSUB 700. Line 700 says PRINT and the next line is RETURN. Thus the computer generates one blank line and goes to line 30, which sets up a loop. Inside the loop, GOSUB 500 and 700 are called three times, once each for $X = 1, 2$, and 3 . This program

ARANG2

```

10 REM WE ARE READING THE LIST FROM DATA
20 FOR X=1 TO 10
30 READ L[X]
40 NEXT X
50 PRINT "HERE IS THE LIST IN ORIGINAL ORDER"
60 GOSUB 410
95 PRINT "HERE WE ARE ARRANGING THE LIST"
100 REM NOW WE TEST PAIRS OF NUMBERS TO SEE IF THEY ARE IN
    ORDER
110 FOR I=1 TO 9
118 REM WHY DON'T WE SAY FOR I=1 TO 10????
120 FOR J=I+1 TO 10
130 IF L[I] <= L[J] THEN 300
140 LET S=L[I]
150 LET L[I]=L[J]
160 LET L[J]=S
170 REM WE HAVE REVERSED TWO ELEMENTS OF THE LIST
180 REM ***** SEE PROGRAM LIST1 *****
200 GOSUB 410
300 NEXT J
400 NEXT I
405 PRINT "AND HERE IS THE LIST IN ORDER FROM SMALLEST TO
    GREATEST"
407 GOSUB 410
408 GOTO 999
410 FOR Y=1 TO 10
420 PRINT L[Y];
430 NEXT Y
440 PRINT
450 RETURN
500 DATA 6,-19,28,20,-32,74,19,28,23,43
999 END
ARANG2

```

```

HERE IS THE LIST IN ORIGINAL ORDER
 6   -19   28   20   -32   74   19   28   23   43
HERE WE ARE ARRANGING THE LIST
-19   6   28   20   -32   74   19   28   23   43
-32   6   28   20   -19   74   19   28   23   43
-32  -19   28   20   6   74   19   28   23   43
-32  -19   20   28   6   74   19   28   23   43
-32  -19   6   28   20   74   19   28   23   43
-32  -19   6   20   28   74   19   28   23   43
-32  -19   6   19   28   74   20   28   23   43
-32  -19   6   19   20   74   28   28   23   43
-32  -19   6   19   20   28   74   28   23   43
-32  -19   6   19   20   23   74   28   28   43
-32  -19   6   19   20   23   28   74   28   43
-32  -19   6   19   20   23   28   28   74   43
-32  -19   6   19   20   23   28   28   43   74
AND HERE IS THE LIST IN ORDER FROM SMALLEST TO GREATEST
-32  -19   6   19   20   23   28   28   43   74

```

DONE

is not intended to actually achieve any particular result except to give us a chance to trace out the path of the computer through several GØSUB statements.

You might wonder why 399 GØTØ 999 is in there. Consider what would happen if it were not there. Line 155 says GØSUB 700, which means go to line 700, execute a line feed, and return. Then what? Line 400 is next. Print "HERE WE ARE AT LINE," and "RETURN." RETURN where? RETURN in this subroutine responds only to GØSUB 400 and there was no such statement. The computer cannot execute such a set of instructions and will print a message to that effect. So you must build a barrier in front of subroutines to prevent the computer from accidentally beginning without the proper GØSUB statement. Notice that lines 500, 600, and 700 are already protected by RETURN statements.

Now we should be ready to enter the GØSUB concept into ARANG1. This program is called ARANG2. Examine lines 60, 200, and 407. See the barrier at line 408 to prevent accidentally beginning the subroutine.

SUMMARY

- 1) The computer list is beginning to emerge as a powerful storage area for keeping numbers while we have the computer perform tests on numbers in the list.
- 2) We can rearrange the elements in numerical order by testing all pairs and exchanging any that are not in the required order.
- 3) GØSUB permits us to use the same set of program statements many times at many different points in a program without disturbing the progress of the computer through the rest of the program.

PROBLEMS FOR SEC. 3-4

- 1) Write a program to print the following numbers in decreasing numerical order: 34, -67, 10, 0, -99, 103, and 1. Count the number of times the computer has to exchange two numbers and the number of comparisons.
- 2) Write a program to print the following numbers in increasing numerical order: 45, 76, -76, 45, and 98. Do not print the duplicated number, but leave it in the list.
- 3) Program the computer to list the numbers in order in problem 1) by comparing elements one and two first, then elements two and three, then elements three and four, etc. Create a switch $S = 0$ for *off* and $S = 1$ for *on*. Turn the switch off, then if an exchange is required, turn the switch on. After testing the last two elements, look at the switch. If it is on, go through the list again. If it is off, print the list; it must be in order. Count the number of tests and the number of exchanges.
- 4) Prepare a five-element list using the averages of the test scores from program AVG in Sec. 3-1. Then arrange the averages in decreasing order and print a number representing the position in the original list. This latter can be done by setting up a second list containing 1, 2, 3, 4, 5, then exchanging these numbers each time the corresponding averages are exchanged.
- 5) Prepare one list with the numbers 0, 6, 1, 3, 7, 2, 3, 1, 4, and 9 and another with 0, 8, 2, 3, 9, 7, 4, 1, 2, and 4. Prepare a third list with the sums of the corresponding elements. So far this is similar to problem 11) in Sec. 3-3. Beginning with

the highest subscript, look at each entry in the sum list. If the entry is less than 10, proceed to the next entry. If the entry is more than 9, subtract 10 from that entry and add 1 to the entry with the next lower subscript. Print all three lists across the page, one above the other, with the sum list last. What have you accomplished?

✓ 6) On seven consecutive days the high and low temperatures were as follows: 51-71, 48-67, 50-77, 55-78, 55-76, 55-75, 49-79. Write a program using lists to find the greatest range and the number of the day on which it occurred, the average high, and the average low.

✓ 7) Prepare two 10-element lists using the following numbers: 43, 65, 92, 38, -45, 0, 15, 61, -61, -15, 45, 54, 52, -14, 49, -3, 66, 72, 29, -1. Arrange all the numbers in increasing numerical order.

✓ 8) The following test scores are given: 65, 71, 82, 63, 90, 58, 66, 67, and 68. Program the computer to list the scores, calculate the average, and then find the number of test scores that were above average and the number below average. Also, find the score where there are the same number of scores above as below.

✓ 9) The Fibonacci numbers are generated by letting the first two numbers of the sequence equal 1, and from there on each number may be found by taking the sum of the previous two elements in the sequence. So you get 1, 1, 2, 3, 5, 8, 13, etc. Prepare two lists: one with the first 10 and the other with the second 10. For each element from 2 to 19 find the difference between the square of the element and the product of the elements immediately preceding and following. In other words, print $F[I]^2 - F[I-1] * F[I+1]$.

CHAPTER 4

Computer Functions

4-1 INTRODUCTION TO INT(), SQR(), ABS(), AND SGN()

The four functions discussed in the following, will prove very useful in BASIC.

INT(X) is used in two ways. In some computers, INT(X) determines the greatest integer not greater than X. For example, if $A = \text{INT}(43.2)$, then $A = 43$; if $A = \text{INT}(6)$, then $A = 6$; and if $A = \text{INT}(-2.3)$, then $A = -3$. In other computers, INT(X) truncates the number X, i.e., it simply removes the decimal part. So if $A = \text{INT}(-2.3)$, then $A = -2$.

SQR(Y) computes the non-negative square root of Y. For example, if $B = \text{SQR}(16)$, then $B = 4$.

Some computers will not compute if $B = \text{SQR}(-16)$. However, if we have many values for which we want the square roots and some happen to be negative, we can instruct the computer to take the square root of the absolute value of Y. BASIC provides ABS(Y) for just such occurrences. For example, $\text{ABS}(18.3) = 18.3$, and $\text{ABS}(-24.61) = 24.61$. So we can use $\text{SQR}(\text{ABS}(Y))$ for the problem above.

A fourth BASIC function which you may not have much call for right now is SGN(N). SGN(N) is +1 if N is positive, 0 if N is 0, and -1 if N is negative. The number in parentheses is called the *argument of the function*. Note that the argument may be an explicit number, a variable, another function, or any algebraic expression. Study the demonstration program ASIS to see how the computer handles these functions.

INT(X) computes the greatest integer of X.

SQR(X) computes the positive square root of X.

ABS(X) computes the absolute value of X.

SGN(X) is +1 if X is positive, 0 if X = 0, -1 if X is negative.

ASIS

```

10 PRINT "X","ABS(X)","SQR(ABS(X))","INT(X)","SGN(X)"
20 READ X
30 PRINT X,ABS(X),SQR(ABS(X)),INT(X),SGN(X)
40 DATA -899913,-35.2,-.032
50 DATA 0,.032,23.412,8391
60 GOTO 20
70 END
RUN
ASIS

```

X	ABS(X)	SQR(ABS(X))	INT(X)	SGN(X)
-899913.	899913.	948.637	-899913.	-1
-35.2	35.2	5.93296	-36	-1
-.032	.032	.178885	-1	-1
0	0	0	0	0
.032	.032	.178885	0	1
23.412	23.412	4.8386	23	1
8391	8391	91.6024	8391	1

OUT OF DATA IN LINE 20

One common use of `INT( )` is for factoring integers. We can look at the quotient of two integers, and if that is an integer, then the denominator is a factor. For example, $65/5 = \text{INT}(65/5)$; therefore 5 is a factor of 65. So in order to find the greatest factor, all we have to do is start with the integer, one less than the number we are trying to factor, and test to see if it divides without remainder. If it does, we use the conditional transfer and send the computer to a `PRINT` statement. If it does not, we let the computer subtract 1 by using a loop and try again. If we start at `N`, we will get $N/N = \text{INT}(N/N)$ the first time through even for prime numbers. Let us also print `N` is prime if it is.

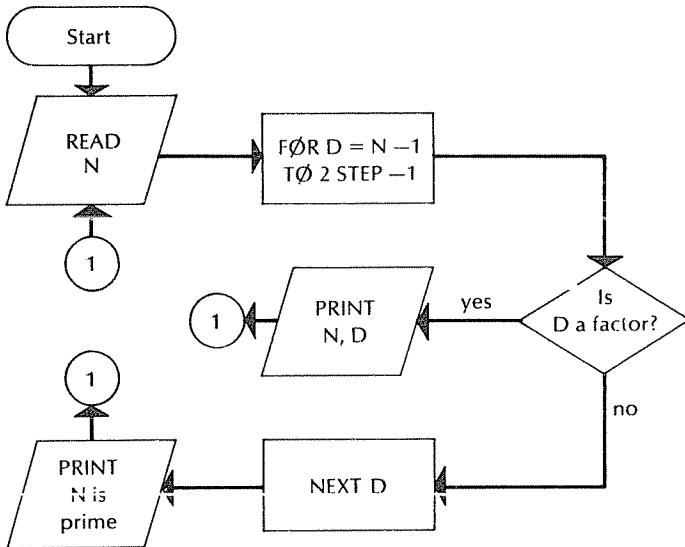


Fig. 4-1. Flowchart for factoring integers.

PRIME1

```

10 READ N
20 FOR D=N-1 TO 2 STEP -1
30 IF N/D=INT(N/D) THEN 70
40 NEXT D
50 PRINT N;"IS PRIME"
60 GOTO 10
70 PRINT D;"IS THE GREATEST FACTOR OF";N
80 GOTO 10
90 DATA 1946,1949,1009,1003
100 DATA 11001,240,11
110 END
RUN
PRIME1

```

```

973 IS THE GREATEST FACTOR OF 1946
1949 IS PRIME
1009 IS PRIME
59 IS THE GREATEST FACTOR OF 1003
3667 IS THE GREATEST FACTOR OF 11001
120 IS THE GREATEST FACTOR OF 240
11 IS PRIME

```

OUT OF DATA IN LINE 10

So we stop at 2 rather than 1. First we draw the flowchart in Fig. 4-1, then write the program PRIME1.

In PRIME1 the computer tested $1949/D$ with 1947 different values for D before it decided that 1949 is prime. That is a lot of tries. Whenever reasonable, we should try to improve the efficiency of our program. What do we know about factors of integers? We know that the smallest possible factor is 2. So the greatest could be $N/2$. For 1949 then, we can reduce the number of tries to 975. But we also know that if we try all possible divisors down to the square root of the number we are trying to factor, then the quotients will also be less

PRIME2

```

10 READ N
20 FOR D=2 TO SQR(N)
30 IF N/D=INT(N/D) THEN 70
40 NEXT D
50 PRINT N;"IS PRIME"
60 GOTO 10
70 PRINT N/D;"IS THE GREATEST FACTOR OF";N
80 GOTO 10
90 DATA 1946,1949,1009,1003
100 DATA 11001,240,11
110 END
RUN
PRIME2

```

```

973 IS THE GREATEST FACTOR OF 1946
1949 IS PRIME
1009 IS PRIME
59 IS THE GREATEST FACTOR OF 1003
3667 IS THE GREATEST FACTOR OF 11001
120 IS THE GREATEST FACTOR OF 240
11 IS PRIME

```

OUT OF DATA IN LINE 10

than the square root. So we might try $\text{FØR } D = N - 1 \text{ TØ } \text{SQR}(N) \text{ STEP } -1$. Well, $\text{SQR}(1949)$ is approximately 44 and this means 1904 tries, which is much worse. But why not go from 2 up to $\text{SQR}(1949)$? Now we have only 43 tries and if we do get divisibility for other numbers, we will have the smallest factor and we can get the greatest factor by dividing the number by its smallest factor. This seems worth making the necessary changes in `PRIME1`. Only lines 20 and 70 require changing. Line 20 is the line which sets up the loop to test for divisibility and line 70 is the `PRINT` statement. In the `PRINT` statement we want N/D printed now, whereas we wanted D printed before. See `PRIME2`.

SUMMARY

Four computer functions were introduced.

- 1) `INT(A)` evaluates the greatest integer of A .
- 2) `SQR(B)` finds the positive square root of B .
- 3) `ABS(C)` computes the absolute value of C .
- 4) `SGN(D)` becomes $+1$ if D is positive, 0 if D is 0 , and -1 if D is negative.

The value in parentheses is called the argument of the function.

PROBLEMS FOR SEC. 4-1

- 1) Modify `PRIME2` to write all pairs of factors.
- 2) Modify the program in problem 1) to print no duplications.
- 3) Write a program that will print only prime factors of integers.
- 4) Write a subroutine that will perform the work of `ABS( )`, without using another computer function.
- 5) Write a subroutine that will perform the work of `SGN( )`, without using another computer function.
- 6) Write a program to print all different pairs of factors of the following set of integers: 711, 991, -991 , 453, -654 , 1009, -1009 , 9001.
- 7) Write a program to print all of the prime positive integers less than 100. Do not let the computer try numbers divisible by 2.
- 8) Print the prime integers from 1000 to 1500. Do not let the computer test the even numbers.
- ✓ 9) For each of the following pairs of numbers, find two numbers so that the sum of your two is the first number in the given pair and the product is the second number in the given pair: 3, 2; 7, 12; 11, 28; -11 , 28; 3, -28 ; 76, 1003; 7, 8; 34, 289.

4-2 REDUCING COMMON FRACTIONS AND DIMENSION CONVERSIONS

Reducing Fractions

We are finally ready to reduce fractions to lowest terms. Look at problems 13) and 14) in Chap. 1. There, if we had added $5/6$ and $7/8$ we would have gotten $82/48$. Since, however, it is customary to reduce fractions, we would like to get $41/24$.

All we have to do is find the largest factor of the numerator that is also a factor of the denominator. Only this time we have to go all the way to 2. So we will use the procedure of program PRIME1. First we should prepare a flowchart. See Fig. 4-2. We simply find the greatest factor of the numerator and see if it is also a factor of the denominator. If it is, fine. If it is not, then we go back and find the next greatest factor of the numerator and test to see if that is a factor of the denominator. If it is, fine. If not, we go back again and look for the next factor of the numerator. If we get all the way to 2 without a number that is a factor of both numerator and denominator, then we print the fraction as it was given. See program REDUCE.

We should try to pick the largest factor of the smaller number to reduce the number of tries the computer has to execute.

Dimension Conversions

We find the INT() function useful in simplifying dimensioned numbers to simplest form. Suppose we change 93 in. to feet and inches. By hand we would divide 93 by 12 and the whole number in the result would be in feet. Then the remainder would be in inches. The problem would appear as follows:

$$\begin{array}{r} 7 \\ 12 \overline{)93} \\ \underline{84} \\ 9 \end{array}$$

and we would say 7 ft 9 in. with no difficulty. We can easily get the 7 by using INT(93/12), but it is an exercise in mathematics to get the 9. Let us look at the division problem in more detail:

$$\begin{array}{r} 7.75 \\ 12 \overline{)93.00} \\ \underline{84} \\ 9.0 \\ \underline{8.4} \\ .60 \\ \underline{.60} \\ .00 \end{array} \qquad \begin{array}{r} .75 \\ 12 \overline{)9.00} \\ \underline{8.4} \\ .60 \\ \underline{.60} \\ .00 \end{array}$$

We see that if we divide 12 into the remainder after integer division, we get the decimal portion of the result if we divide by 12 by decimal division. That is,

$$9/12 = 93/12 - \text{INT}(93/12)$$

for this problem. Or in general, for N divided by D and calling the remainder R we get

$$R/D = N/D - \text{INT}(N/D)$$

Multiplying both sides by D we get

$$R = N - \text{INT}(N/D) \cdot D$$

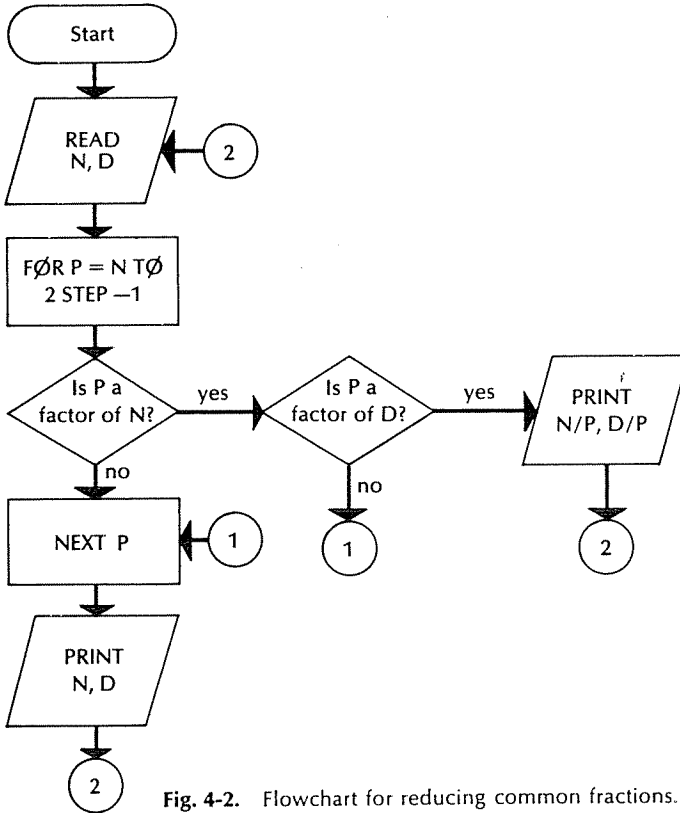


Fig. 4-2. Flowchart for reducing common fractions.

REDUCE

```

10 READ N,D
20 FOR P=N TO 2 STEP -1
30 IF N/P=INT(N/P) THEN 70
40 NEXT P
50 PRINT N"/"D
60 GOTO 10
70 IF D/P=INT(D/P) THEN 90
80 GOTO 40
90 PRINT N"/"D"="N/P"/"D/P
100 GOTO 10
110 DATA 5,6
120 DATA 82,48
130 DATA 3,4
140 DATA 36,48
150 END
RUN
REDUCE

```

```

5    / 6
82   / 48 = 41 / 24
3    / 4
36   / 48 = 3   / 4

```

OUT OF DATA IN LINE 10

So all we need is a program statement $\text{LET } R = N - \text{INT}(N/D) * D$. See line 20 in program DEMREM.

DEMREM

```

5  PRINT "NUMERATOR","DENOMINATOR","REMAINDER","INTEGER QUOTIENT"
10 READ N,D
15  REM  FIND THE REMAINDER WHEN 'N' IS DIVIDED BY 'D'
20  LET R=N-INT(N/D)*D
30  PRINT N,D,R,INT(N/D)
40  GOTO 10
50  DATA 93,12,100,25,365,52,365,7
52  DATA 365,12,52,13,5280,440,55,6
60  END
RUN
DEMREM

```

NUMERATOR	DENOMINATOR	REMAINDER	INTEGER QUOTIENT
93	12	9	7
100	25	0	4
365	52	1	7
365	7	1	52
365	12	5	30
52	13	0	4
5280	440	0	12
55	6	1	9

OUT OF DATA IN LINE 10

Now we can easily convert numbers in inches to feet and inches. First see the flowchart in Fig. 4-3 and then the program CONVRT.

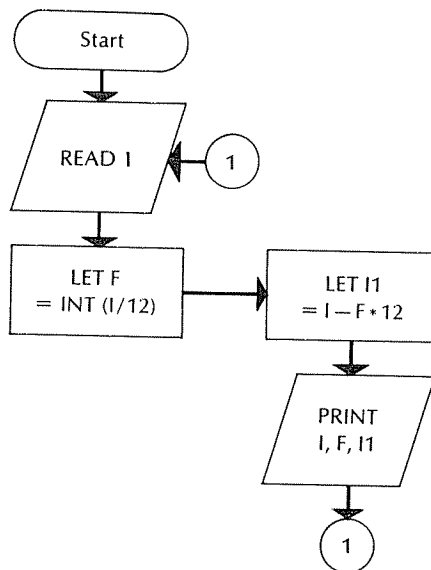


Fig. 4-3 Flowchart for converting numbers in inches to feet and inches.

54 Basic BASIC

CONVRT

```
10 READ I
20 LET F=INT(I/12)
30 LET I1=I-F*12
40 PRINT I"INCHES ="F"FEET  "I1"INCHES"
45 GOTO 10
50 DATA 9,86,47,37,947,480
60 END
```

RUN

CONVRT

9	INCHES = 0	FEET	9	INCHES
86	INCHES = 7	FEET	2	INCHES
47	INCHES = 3	FEET	11	INCHES
37	INCHES = 3	FEET	1	INCHES
947	INCHES = 78	FEET	11	INCHES
480	INCHES = 40	FEET	0	INCHES

OUT OF DATA IN LINE 10

SUMMARY

1) We can now find the greatest common factor of two integers and thus reduce fractions to lowest terms.

2) We have seen that the INT() function may be used to break quotients up into their integer part and their decimal part less than 1.

3) We can find the remainder in a division problem by using $R = N - \text{INT}(N/D) * D$. This allows us to convert dimensioned numbers, such as inches, to feet and inches.

PROBLEMS FOR SEC. 4-2

1) Write a program to add two simple fractions and print the sum reduced to lowest terms.

2) Improve the efficiency of program REDUCE by putting the smaller number in the P loop in line 20.

3) Write a program to convert improper fractions to mixed numbers.

4) Convert inches to yards and feet and inches.

✓ 5) Write a program to multiply two fractions, converting the result to a mixed number in reduced form.

✓ 6) Convert dollars in decimal form to the equivalent in coins.

7) Do problem 5) for adding two fractions.

8) For each of the following pairs of numbers, find the greatest common factor: 190, 1083; 27, 35; 27, 36; 16, 34; 12, 30.

9) For each of the following pairs of numbers, find the least common multiple: 190, 1083; 25, 745; 187, 34.

10) Prepare a list consisting of the first 10 Fibonacci numbers. Find the greatest common factor for every pair in the list, prepare a list of these with no duplications, and print them.

✓ 11) Write a program to find the greatest common factor of sets of three numbers assigned as data.

4-3 PROGRAM-DEFINED FUNCTIONS

Suppose we have \$56.31 in a savings account bearing 4½% interest compounded monthly and we hear of a bank that is offering 4¾% compounded quarterly. Should we change banks? We did work with compound interest earlier. So this should be a matter of doing two calculations in the same program. Let us leave the \$56.31 in each bank for 10 years and see if there is enough difference to change banks. For compounding monthly, we use the yearly rate divided by 12, and calculate and add the interest 12 times per year. For quarterly compounding, we use the yearly rate divided by 4, and calculate and add interest four times per year. In this case, use one loop for the years and a 1 to 12 loop for monthly compounding and a 1 to 4 loop for quarterly compounding, both inside the same 1- to 10-year loop. The flowchart in Fig. 4-4 should help to sort out this plan.

Since the intent is to develop several concepts in this program that will require changing the printing, the variables will be printed individually on separate lines. This technique may often save typing when you anticipate

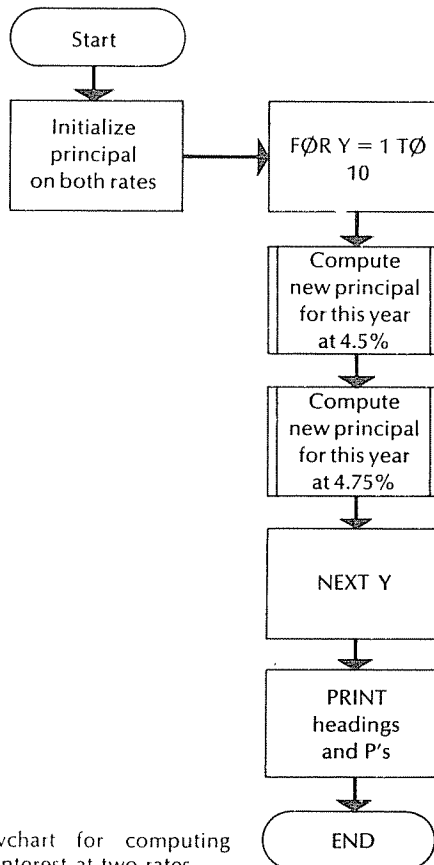


Fig. 4-4. Flowchart for computing compound interest at two rates.

making changes as you develop a program. Thus in program BANK1 lines 130 and 150 are printed with semicolons at the end so that the printing can be placed at the ends of those lines from PRINT instructions on other lines. The values of the different principals will be printed, according to instructions, on lines 140 and 160.

Note: On some computers line 10 of BANK1 would be written as 10 LET P, P1 = 0.

We can certainly obtain the information we want from the RUN of this program in its present form. Clearly, we would get more interest by changing banks. You will have to decide whether it is worth switching. Even so, let us see what we can do to simplify the results. For instance, when we talk about money, most of us tend to round off to the nearest cent. So we should be able to have the computer do that too. We could multiply by 100 and then take the greatest integer, but that would give 8823 for P and we want dollars and cents. Let us then divide by 100 again and get 88.23. However, we really want 88.24 because the .007 is more than one half a cent. We can obtain this by adding .5 after we multiply by 100, then taking the greatest integer and dividing by 100 again. Adding .5 to positive numbers from .5 to .99 results in numbers from 1.0 to 1.49, and sends positive numbers from .01 to .49 into numbers from .51 to .99. When we take INT(the sum), the result increases by 1 for numbers .5 or more and is unchanged for numbers less than .5. Thus

BANK 1

```

10 LET P=P1=56.31
20 FOR Y=1 TO 10
22 REM FOR TEN YEARS
30 FOR M=1 TO 12
32 REM COMPOUND MONTHLY AND COMPUTE INTEREST
40 LET I=P*4.5/100/12
50 LET P=P+I
60 NEXT M
62 REM THAT FIGURES THE INTEREST FOR THIS YEAR COMPOUNDED
   MONTHLY
70 FOR Q=1 TO 4
72 REM COMPOUND QUARTERLY
80 LET I1=P*4.75/100/4
90 LET P1=P+I1
100 NEXT Q
102 REM THAT TAKES CARE OF THE QUARTERLY INVESTMENT FOR THIS
   YEAR
108 REM NOW TO COMPUTE THE NEXT YEAR
110 NEXT Y
120 PRINT "FOR TEN YEARS"
130 PRINT "04.5% COMPOUNDED MONTHLY...";
140 PRINT P
150 PRINT "04.75% COMPOUNDED QUARTERLY...";
160 PRINT P1
9999 END
RUN
BANK 1

```

```

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY... 88.2374
04.75% COMPOUNDED QUARTERLY... 90.2943

```

DONE

```

RØUND

10 READ X
20 LET Y=INT(X*100+.5)/100
30 PRINT Y,X
40 DATA 2.31462,2.34999,2.35001,382,617.346,3.86149E-02
50 GØTØ 10
60 END
RUN
RØUND

2.31          2.31462
2.35          2.34999
2.35          2.35001
382           382
617.35        617.346
.04           3.86149E-02

ØUT ØF DATA IN LINE 10

```

we have a rounding function all our own as follows:

$\text{LET } Y = \text{INT}(X * 100 + .5)/100$

Let us try this with a few numbers to see that it actually works, before we insert it in our banking problem. See RØUND. (It may often be wise to perfect a technique in a smaller uninvolved program before trying it in a longer more complicated one. There should be fewer sources of error in the final program.)

RØUND works out well. However, we often have more than one variable that we want to round off. BASIC has a way of doing this. We may define any function of our own using $\text{DEF FNA}(X) = \text{ZZZZZZZZZZZZ}$, where X is a dummy variable. It simply holds a place where we will later enter the variable for which we want the function evaluated. The format of our rounding function looks like this:

$\text{XXX DEF FNH}(Z) = \text{INT}(Z * 100 + .5)/100$

XXX is the line number of the statement number of the DEFining statement in a BASIC program. We may substitute any letter of the alphabet for H. Thus, we may for example, $\text{DEF FNI}()$ and $\text{DEF FNJ}()$ for other functions in the same program. The third letter is the one that identifies which function we are calling for. We may define another function that rounds off to tenths as $\text{ZZZ DEF FNT}(G) = \text{INT}(G * 10 + .5)/10$ and whenever we call for $\text{FNT}()$, we round off to tenths. Let us see how this works out in program $\text{DEF}()$.

DEF

$\text{XXX DEF FNA}(X) = (\text{any legal BASIC expression})$. BASIC provides a program-defined function. It begins with FN followed by a third letter which is used to identify the function. (Some computers allow more than one argument.)

```
DEF()
```

```
20 DEF FNH(H)=INT(H*100+.5)/100
30 DEF FNT(T)=INT(T*10+.5)/10
40 PRINT "X","Y","X/Y","FNH(X/Y)","FNT(X/Y)"
45 READ X,Y
50 PRINT X,Y,X/Y,FNH(X/Y),FNT(X/Y)
60 DATA 1,11,10,3,3,4,6,11.2,3.125,8.6324
70 GOTO 45
80 END
RUN
DEF()
```

X	Y	X/Y	FNH(X/Y)	FNT(X/Y)
1	11	9.09091E-02	.09	.1
10	3	3.33333	3.33	3.3
3	4	.75	.75	.8
6	11.2	.535714	.54	.5
3.125	8.6324	.362008	.36	.4

```
OUT OF DATA IN LINE 45
```

Now we can alter our compound interest program BANK1. We only need to change two lines and insert the DEF statement. It is common practice to put all DEF statements at the beginning of the program. Let us also put in dollar signs (\$).

```
2 DEF FNH(X)=INT(X*100+.5)/100
140 PRINT "$"FNH(P)
160 PRINT "$"FNH(P1)

RUN
BANK1

FOR TEN YEARS
@4.5% COMPOUNDED MONTHLY...$ 88.24
@4.75% COMPOUNDED QUARTERLY...$ 90.29

DONE
```

The results in the above program are rounded off to the nearest cent and the dollar signs make it clear that we are dealing with money. However, it would be even better if we could line up the decimal points. If your version of BASIC does not provide a computer function to override the semicolon spacing, you may write your own subroutine that will allow you to place results exactly where you want them printed. In our particular problem all we want to do is move the first number three spaces to the right. But we might then want to move them both further to the right. So let us take the time to develop a subroutine.

What we are trying to do is to gain control over the number of spaces between items of printed output. This implies getting the computer to print different numbers of spaces according to our need. This suggests putting XXX

PRINT " "; in a loop and letting the high number be a variable that equals the number of blank spaces required. The following subroutine will print X spaces.

```
500  FØR S = 1 TØ X
510  PRINT " ";
520  NEXT S
530  RETURN
```

In BANK1, no matter where we place the numbers, we will have to put the first number three spaces further to the right than the second number. We may now accomplish the required spacing by first printing according to line 130 and then setting a reasonable value of X followed by GØSUB 500. Upon getting the computer to print according to line 150, we next LET X = X - 3 put in three fewer spaces and GØSUB 500 again. Finally, we must be sure that we do not let the computer enter the subroutine accidentally. Should this happen, the computer will attempt to execute the RETURN statement when there was no prior GØSUB to direct it. To avoid this we can use 490 GØTØ 9999. However, BASIC has the statement XXX STØP for just such a situation.

STØP

XXX STØP is equivalent to XXX GØTØ 9999 when 9999 is the END statement.

Below we list the latest changes, and name the resulting program BANK2. The entire program is listed to see where things fit together. As you can see, the results are aligned in the RUN.

```
132  LET X=4
138  GØSUB 500
156  LET X=X-3
158  GØSUB 500
490  STØP
500  FØR S=1 TØ X
510  PRINT " ";
520  NEXT S
530  RETURN
```

RUN
BANK2

```
FØR TEN YEARS
Ø4.5% CØMPØUNDED MØNTHLY...    $ 88.24
Ø4.75% CØMPØUNDED QUARTERLY... $ 90.29
```

DØNE

BANK2

```

2  DEF FNH(X)=INT(X*100+.5)/100
10 LET P=P1=56.31
20 FOR Y=1 TO 10
22 REM FOR TEN YEARS
30 FOR M=1 TO 12
32 REM COMPOUND MONTHLY AND COMPUTE INTEREST
40 LET I=P*4.5/100/12
50 LET P=P+I
60 NEXT M
62 REM THAT FIGURES THE INTEREST FOR THIS YEAR COMPOUNDED
   MONTHLY
70 FOR Q=1 TO 4
72 REM COMPOUND QUARTERLY
80 LET I1=P1*4.75/100/4
90 LET P1=P1+I1
100 NEXT Q
102 REM THAT TAKES CARE OF THE QUARTERLY INVESTMENT FOR THIS
   YEAR
108 REM NOW TO COMPUTE THE NEXT YEAR
110 NEXT Y
120 PRINT "FOR TEN YEARS"
130 PRINT "04.5% COMPOUNDED MONTHLY...";
132 LET X=4
138 GOSUB 500
140 PRINT "$"FNH(P)
150 PRINT "04.75% COMPOUNDED QUARTERLY...";
156 LET X=X-3
158 GOSUB 500
160 PRINT "$"FNH(P1)
490 STOP
500 FOR S=1 TO X
510 PRINT " ";
520 NEXT S
530 RETURN
9999 END
RUN
BANK2

```

```

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY...      $ 88.24
04.75% COMPOUNDED QUARTERLY...  $ 90.29

```

DONE

Now as long as we have the spacing subroutine available, let us try several values of X in line 132 and see what happens.

```

132 LET X=10
RUN
BANK2

```

```

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY...      $ 88.24
04.75% COMPOUNDED QUARTERLY...  $ 90.29

```

DONE

```

132 LET X=20
RUN
BANK2

```

```

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY...      $ 88.24
04.75% COMPOUNDED QUARTERLY...    $ 90.29

```

```

DONE

```

```

132 LET X=3
RUN
BANK2

```

```

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY...      $ 88.24
04.75% COMPOUNDED QUARTERLY...    $ 90.29

```

```

DONE

```

Note: See Appendix C for TAB() and PRINT USING formatting functions.

SUMMARY

1) The program-defined function DEF FNA(X) has been introduced. This allows us to have the computer perform the same function on different variables.

2) The STOP statement may be used to terminate the RUN of a program at places other than the physical end of the program. The end of a program specified in this way may be referred to as the *logical end*.

3) We have constructed a subroutine that enables us to control more precisely than with the semicolon or comma the spacing of printed results by putting " "; in a loop. This gives more versatility of format.

PROBLEMS FOR SEC. 4-3

1) Find the square roots of the integers from 11 to 23. Print the integer, its square root, and its square root rounded off to the nearest thousandth and to the nearest tenth with appropriate labels.

2) How much money will you have in the bank, if you deposit \$5 at the beginning of every month for 25 years in a savings account which pays 4½% compounded monthly?

3) Define a function for $Y = -3X^2 + 7X - 3$. Print pairs of values for $X = -4$ to 5.

4) Do problem 2), but for daily compounding. Ignore leap year; use 12, 30-day months.

✓ 5) Set up a table of amounts that \$100.00 will be at the end of 5, 10, 15, and 20 years at 4%, 4½%, 4¾%, and 5% per year compounded monthly. Put the rates in a rate loop. Print the years across the top and the rates in the first column of each row.

✓ 6) Write a program to compare \$99.00 compounded monthly at 4¾%, quarterly at 5%, and daily at 4½% for 15 years. Print with the decimal points lined up.

7) Define a function for $Y = 3X + 4$. Print pairs of values for X and Y for $X = -5$ to 5.

8) Define a function for $Y = 2X^2 + 8X - 1$. Print pairs of values for X and Y for $X = -6$ to 2.

4-4 RANDOM NUMBER GENERATOR

The last computer function we will consider in this chapter is RND(X). Often in programming we want numbers to try out a new program. Also, there are many events in mathematics and science that occur at random. If we do not have any real data or we want a very large number of numbers, it is desirable to have the computer pick the numbers for us. This can be done in BASIC with the computer function RND(X).

RND(X) picks at random a decimal fraction between 0 and 1. It will not pick 0 or 1. Depending on the computer, the value of X may be immaterial, but there must be a number in parentheses. If the argument does not affect the numbers generated, it is called a *dummy argument*. Some computers use the argument to determine the numbers generated. Computers vary as to the actual set of random numbers generated. Some have a fixed set of numbers that is the same every time RND() is used in the same program. Such a random number generator is called a *pseudo random number generator*. Others give a different set of numbers each time you run the same program. Program RND(1) is a short routine that prints a few random numbers.

```
RND(1)
```

```
10 FOR X=1 TO 10
20 PRINT RND(5),
30 NEXT X
40 END
RUN
RND(1)
```

```
  .788345      .865051      .595169      .285522      .856583
  6.97632E-02  .209305      .12793      .383804      .651428
```

```
DONE
```

Before we get very far trying to use RND(Z) we realize that numbers between 0 and 1 do indeed limit us greatly as a source of data. Suppose we want data selected from 1 to 10. First we might try to multiply the random number by 10 before taking the INT() function. Let us try it in RND(2).

```
RND(2)
```

```
10 FOR X=1 TO 20
20 PRINT INT(10*RND(1)),
30 NEXT X
40 END
RUN
RND(2)
```

```
  3    5    5    2    6    3    1    0    2    3    9    4
  2    2    6    3    9    4    3    4
DONE
```

Program RND(2) seems only to give integers 0 through 9. However, RND(Z) will never take on 1 as a value, and therefore multiplying by 10 will never yield 10 as the product. But we can add 1 to each of the above integers and both include 10 and exclude 0, which is exactly what we set out to do. The 1 can be added either before or after taking INT(). We get 1 to 10 in program RND(3).

RND(3)

```
10  FOR X=1 TO 30
20  PRINT INT(10*RND(1))+1);
30  NEXT X
40  END
RUN
RND(3)
```

```
 5      8      4      5      3      3      7      5      5      10      9      10
 8      7      1      7      1      8      3      4      2      10      9      1
 1      6      6      1      3      3
DONE
```

If we want decimal numbers from 1 to 11, not including 11, all we have to do is leave out the INT(), as in RAND3+.

RAND3+

```
10  FOR X=1 TO 10
20  PRINT 10*RND(9)+1);
30  NEXT X
40  END
RUN
RAND3+
```

```
10.0205      3.06177      7.18546      4.55652      1.66971      8.00928
2.02798      9.08411      5.25247      8.75757
DONE
```

Now we have a way to determine the interval in which the numbers are picked. If we can get 1 to 11 with $10 * \text{RND}(Z) + 1$, we ought to be able to get 1 to 100 with $99 * \text{RND}(Z) + 1$.

RND(X)

XXX LET Y = RND(X) will assign at random a number between 0 and 1 to Y. We can get integers from 1 to A with $\text{INT}(A * \text{RND}(X) + 1)$.

Now, what shall we do with randomly assigned numbers? The possibilities are endless. We could put some in a list and arrange them in numerical order. Remember ARANGE? Instead of reading data, we can use randomly assigned numbers. This time, let us not print the list after every exchange, but only after it is in order. How about picking integers from 1 to 250? This will require $\text{INT}(250 * \text{RND}(1) + 1)$. This time let us rewrite the program to look at successive adjacent pairs in the list. This method was outlined in problem 3) of Sec. 3-4. As we have the computer look at each pair, we have it decide whether the first is less than or equal to the second. If it is, then we do not exchange—exactly as in ARANGE. But if the first is greater than the second, we call for the exchange. However, there is no guarantee that the list is in order after the first time through. So we have to turn on a switch after each exchange. Then after the computer has gone through the list comparing 1 and 2, then 2 and 3, then 3 and 4, etc., we have it check the switch. The

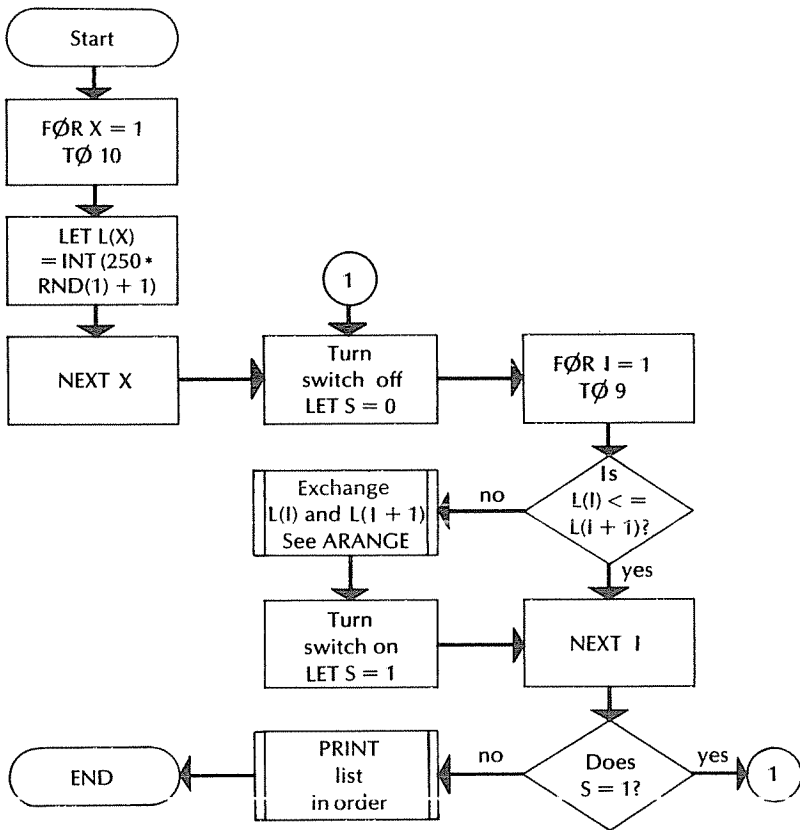


Fig. 4-5. Flowchart for arranging a list of numbers assigned from RND() using comparison of adjacent pairs.

name of the switch can be any number of things, but here we will use S. If $S = 0$, the switch is off. If $S = 1$, the switch is on and we tell the computer to look at the list again. If the switch is off, we want the computer to print the ordered list. Under what conditions do you think this will be the most efficient ordering technique? The name of this program is ARANG3 and its flowchart is in Fig. 4-5.

ARANG3

```

10  FOR X=1 TO 10
20  LET L(X)=INT(250*RND(1)+1)
40  NEXT X
58  REM   TURN THE SWITCH OFF!!!
60  LET S=0
70  FOR I=1 TO 9
80  IF L[I] <= L[I+1] THEN 130
90  LET K=L[I]
100 LET L[I]=L[I+1]
110 LET L[I+1]=K
120 LET S=1
121 REM *** TURN THE SWITCH ON ***
130 NEXT I
138 REM IS THE SWITCH ON??
140 IF S=1 THEN 60
142 REM   IF THE SWITCH IS OFF THERE WERE NO EXCHANGES AND
143 REM THE LIST IS IN ORDER
145 PRINT "THE NUMBERS IN ORDER"
150 FOR X=1 TO 10
160 PRINT L(X);
170 NEXT X
180 END
RUN
ARANG3

```

```

THE NUMBERS IN ORDER
 12   67   75   98   109   161   162   199   221   231
DONE

```

The program looks fine, but nobody could prove that we really used the ordering routine to put the list in order, because we do not know what the original list was. So let us put back the routine that prints the list as it is formed.

```

5  PRINT "HERE IS THE LIST AS IT IS BEING FORMED***"
30 PRINT L(X);
42 PRINT
RUN
ARANG4

```

```

HERE IS THE LIST AS IT IS BEING FORMED***
 94   156   216   22   64   65   195   210   129   11
THE NUMBERS IN ORDER
 11   22   64   65   94   129   156   195   210   216
DONE

```

Fine! Now we believe it. We have just put 10 random numbers in order. It is about time we found out how to create longer lists.

DIM

We can usually get 10 (or 11) elements in a list. If we want longer lists we simply notify the computer that we wish to specify a greater dimension for our list. The BASIC statement is XXX DIM L[Z], where Z is the highest subscript in the list. Computers vary. Some allow a variable in parentheses, while others require an explicit integer. If you do not know how long the list is going to be, simply pick a number larger than you think you will need. You need not use every location in the list. Let us dimension a list in ARANG4 up to 75 and use 20 locations to see how a longer list looks.

```

2  DIM L(75)
7  LET N=20
10  FOR X=1 TO N
70  FOR I = 1 TO N-1
150  FOR X=1 TO N
RUN
ARANG5

HERE IS THE LIST AS IT IS BEING FORMED***
41    246    236    83    248    119    107    195    85    128    134    25

73    93     27    204    111    208    122    241
THE NUMBERS IN ORDER
25    27     41    73     83     85     93     107    111    119    122    128

134    195    204    208    236    241    246    248
DONE

```

The program seems to work nicely. Let us try a few other numbers.

```

7  LET N=5
RUN
ARANG5

HERE IS THE LIST AS IT IS BEING FORMED***
71     86     6     141    172
THE NUMBERS IN ORDER
6      71     86     141    172
DONE

```

For N = 25 we list the entire program with all the changes we have made. Notice that when we made the original change we put lines 10, 70, and 150 in terms of N so that we would not have to retype them each time we made a minor change in the length of the list. See ARANG5.

DIM

XXX DIM A[24], B[75], L[33] dimensions three lists. The A list has 24 as its highest subscript, B has 75, and L has 33. You may dimension as many lists as will fit on one line.

ARANG5

```

2  DIM L[75]
5  PRINT "HERE IS THE LIST AS IT IS BEING FORMED***"
7  LET N=25
10 FOR X=1 TO N
20 LET L[X]=INT(250*RND(1)+1)
30 PRINT L[X];
40 NEXT X
42 PRINT
58 REM   TURN THE SWITCH OFF!!!
60 LET S=0
70 FOR I=1 TO N-1
80 IF L[I] <= L[I+1] THEN 130
90 LET K=L[I]
100 LET L[I]=L[I+1]
110 LET L[I+1]=K
120 LET S=1
121 REM *** TURN THE SWITCH ON ***
130 NEXT I
138 REM IS THE SWITCH ON??
140 IF S=1 THEN 60
142 REM   IF THE SWITCH IS OFF THERE WERE NO EXCHANGES AND
143 REM THE LIST IS IN ORDER
145 PRINT "THE NUMBERS IN ORDER"
150 FOR X=1 TO N
160 PRINT L[X];
170 NEXT X
180 END
RUN
ARANG5

```

HERE IS THE LIST AS IT IS BEING FORMED***

107	195	85	130	138	38	112	209	127	5	15	168
5	138	162	109	75	98	44	6	18	177	30	213

138

THE NUMBERS IN ORDER

5	5	6	15	18	30	38	44	75	85	98	107
109	112	127	130	138	138	138	162	168	177	195	209

213

DONE

We will now generate random data for one other type of problem. If it is 4 o'clock, 10 hours later it will be 2 o'clock. This concept contains the seed of the development of modular arithmetic. First let us write a little program to take random times and add random numbers of hours. The random times must be numbers from 1 to 12. The random numbers of hours could have virtually any range, but 1 to 36 will do. The flowchart of Fig. 4-6 should help to organize the problem. We can determine the number of computations with a loop. Here we are picking 10 pairs of numbers, with T for time and H for hours. Then we add them and check to see if the sum is less than or equal to 12. If the sum is less than or equal to 12, we want to have the sum printed as the time. If the sum is greater, we want to subtract 12 and check to see if the result is less than or equal to 12, etc. After the sum is printed we want the computer to return and pick another pair and repeat the same process until 10 pairs of numbers have been picked and processed. See CLOCK1.

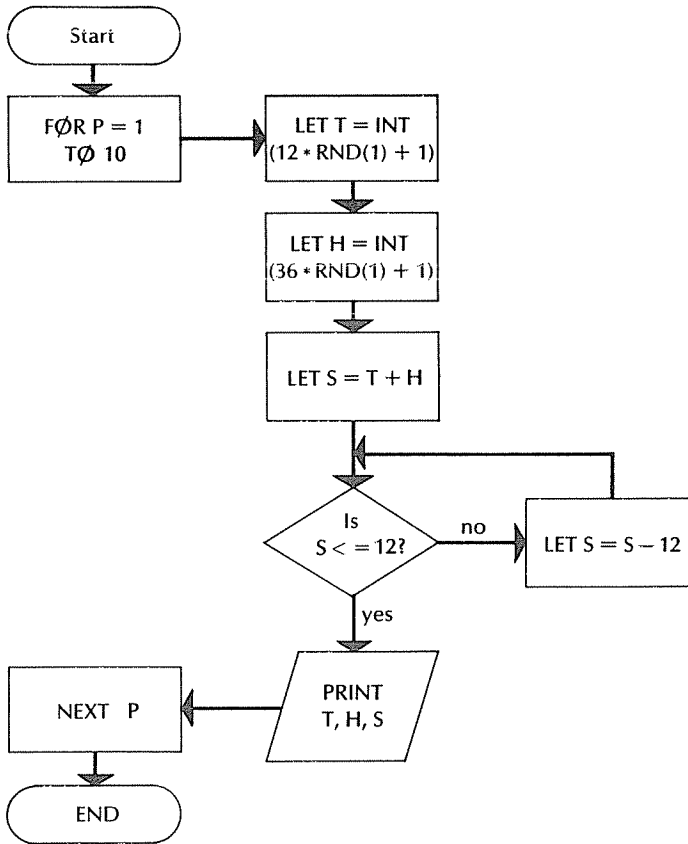


Fig. 4-6. Flowchart for adding hours to times and computing times for program CLOCK.

Now, if we want to change the number picked for hours, we can change line 30 to 30 LET H = INT(12 * RND(1) + 1) and get the same range for both T and H. But then we would have two lines using exactly the same function:

```

20 LET T = INT(12 * RND(1) + 1)
30 LET H = INT(12 * RND(1) + 1)

```

This situation is a candidate for the program-defined function:

```
DEF FNC(Z) = INT(12 * RND(Z) + 1)
```

Then lines 20 and 30 are

```

20 LET T = FNC(1)
30 LET H = FNC(1)

```

CLØCK1

```

10 FOR P=1 TO 10
20 LET T=INT(12*RND(1)+1)
30 LET H=INT(36*RND(1)+1)
40 LET S=T+H
50 IF S <= 12 THEN 80
60 LET S=S-12
70 GØTØ 50
80 PRINT H"HØURS FRØM"T"Ø "CLØCK IT WILL BE"S"Ø "CLØCK"
90 NEXT P
100 END

```

RUN

CLØCK1

```

8   HØURS FRØM 6   Ø "CLØCK IT WILL BE 2   Ø "CLØCK
33  HØURS FRØM 9   Ø "CLØCK IT WILL BE 6   Ø "CLØCK
27  HØURS FRØM 5   Ø "CLØCK IT WILL BE 8   Ø "CLØCK
33  HØURS FRØM 5   Ø "CLØCK IT WILL BE 2   Ø "CLØCK
31  HØURS FRØM 9   Ø "CLØCK IT WILL BE 4   Ø "CLØCK
32  HØURS FRØM 12  Ø "CLØCK IT WILL BE 8   Ø "CLØCK
2   HØURS FRØM 9   Ø "CLØCK IT WILL BE 11  Ø "CLØCK
28  HØURS FRØM 4   Ø "CLØCK IT WILL BE 8   Ø "CLØCK
8   HØURS FRØM 10  Ø "CLØCK IT WILL BE 6   Ø "CLØCK
4   HØURS FRØM 11  Ø "CLØCK IT WILL BE 3   Ø "CLØCK

```

DØNE

In CLØCK2 we change lines 20 and 30 and insert line 5 to define FNC() and list the program in full.

CLØCK2

```

5  DEF FNC(Z)=INT(12*RND(Z)+1)
10 FOR P=1 TO 10
20 LET T=FNC(1)
30 LET H=FNC(1)
40 LET S=T+H
50 IF S <= 12 THEN 80
60 LET S=S-12
70 GØTØ 50
80 PRINT H"HØURS FRØM"T"Ø "CLØCK IT WILL BE"S"Ø "CLØCK"
90 NEXT P
100 END

```

RUN

CLØCK2

```

6   HØURS FRØM 6   Ø "CLØCK IT WILL BE 12  Ø "CLØCK
7   HØURS FRØM 8   Ø "CLØCK IT WILL BE 3   Ø "CLØCK
7   HØURS FRØM 12  Ø "CLØCK IT WILL BE 7   Ø "CLØCK
8   HØURS FRØM 3   Ø "CLØCK IT WILL BE 11  Ø "CLØCK
5   HØURS FRØM 7   Ø "CLØCK IT WILL BE 12  Ø "CLØCK
4   HØURS FRØM 4   Ø "CLØCK IT WILL BE 8   Ø "CLØCK
7   HØURS FRØM 5   Ø "CLØCK IT WILL BE 12  Ø "CLØCK
4   HØURS FRØM 11  Ø "CLØCK IT WILL BE 3   Ø "CLØCK
11  HØURS FRØM 3   Ø "CLØCK IT WILL BE 2   Ø "CLØCK
10  HØURS FRØM 12  Ø "CLØCK IT WILL BE 10  Ø "CLØCK

```

DØNE

Modular Arithmetic

From the clock program we can easily develop the concept of modular addition. The biggest difference between modular addition and the last program is that for modulo 12 addition mathematicians define the set of integers as $\{0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11\}$, dropping 12 and appending 0. Now we may not allow sums of 12 as before. So we will have to change line 50 to test for less than or equal to 11 not 12. But we must not change line 60 which subtracts 12. Why? Since we defined a function in CLØCK2, we need change only line 5 to generate integers from 0 to 11. As we wrote CLØCK1, we would have had to change two lines. Of course, we will have to change the printing and name the new program MØD12.

MØD12

```

5 DEF FNC(Z)=INT(12*RND(Z))
10 FOR P=1 TO 10
20 LET T=FNC(1)
30 LET H=FNC(1)
40 LET S=T+H
50 IF S <= 11 THEN 80
60 LET S=S-12
70 GOTO 50
80 PRINT H;"+"T;"="S"MØD 12"
90 NEXT P
100 END
RUN
MØD12

```

```

 7 + 6 = 1 MØD 12
 8 + 5 = 1 MØD 12
 2 + 9 = 11 MØD 12
 8 + 6 = 2 MØD 12
10 + 8 = 6 MØD 12
 1 + 1 = 2 MØD 12
 1 + 3 = 4 MØD 12
 7 + 11 = 6 MØD 12
10 + 9 = 7 MØD 12
 1 + 7 = 8 MØD 12

```

DØNE

```

RUN
MAMØD12

```

```

10 + 4 = 2 MØD 12
 1 + 2 = 3 MØD 12
 6 + 1 = 7 MØD 12
 3 + 10 = 1 MØD 12
 1 + 10 = 11 MØD 12

```

DØNE

MAMØD12

```

5 DEF FNC(Z)=INT(12*RND(Z))
10 FOR P=1 TO 5
20 LET A=FNC(1)
30 LET B=FNC(1)
40 LET S=A+B
50 PRINT A;"+"B;"=" ";
60 GOSUB 500
70 LET S=A*B
80 PRINT A;"*"+B;"=" ";
85 GOSUB 500
87 PRINT
90 NEXT P
490 STOP
500 IF S <= 11 THEN 530
510 LET S=S-12
520 GOTO 500
530 PRINT S"MØD 12 ";
540 RETURN
9999 END

```

```

10 * 4 = 4 MØD 12
 1 * 2 = 2 MØD 12
 6 * 1 = 6 MØD 12
 3 * 10 = 6 MØD 12
 1 * 10 = 10 MØD 12

```

Where there is addition, multiplication is bound to follow. Suppose we multiply 5 by 7. We are accustomed to getting 35. But for MØD12 we only allow 0 through 11, so we subtract 12 and get 23, which is still too large. Subtract 12 again to get 11. Thus we are going to use the subtraction routine in the multiplication part of MØD12 also. This is a GØSUB situation. In the flow-

chart of Fig. 4-7, the GØSUB predefined process is the subroutine of lines 50, 60, and 70 in MØD12. Of course, there are more changes in printing. We call the program MAMD12 (Multiply and Add MoD 12).

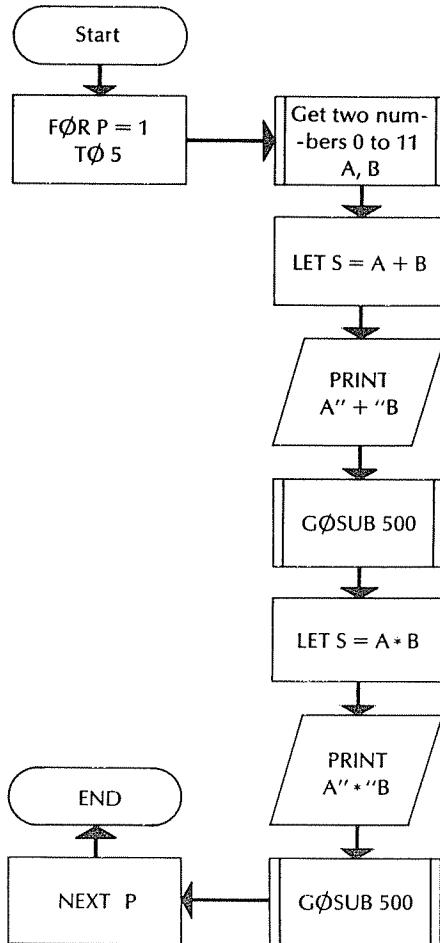


Fig. 4-7. Flowchart for adding and multiplying mod 12 for program MAMD12.

SUMMARY

Two major expansions in our programming capability have occurred in this section. We are now able to generate random numbers in any range we like. They can be limited to integers or they can be decimal numbers. And lists may now be dimensioned to the length that we require. We have also used the GØSUB statement to good advantage in a modular arithmetic program.

PROBLEMS FOR SEC. 4-4

1) Print a list of 30 randomly assigned numbers from 2.00 to 20.00 with tenths and hundredths permitted but no digits to the right.

2) Print a list of 25 integers from -200 to 200 assigned by a random number function in increasing order.

3) Print the list in problem 2) to guarantee that there are no duplications. In other words, if you generate a number that has already been used, generate another.

4) Prepare a list of the first 18 Fibonacci numbers. For all nonequal pairs find the greatest common factor. Enter the greatest common factors in a list with no duplications and print the result.

5) Prepare a list of the first 20 Fibonacci numbers. For $1 = 2$ to 19 print $F[I] ** 2 - F[I - 1] * F[I + 1]$.

6) Use three lists to add two 20-digit numbers. Use one list for each number and enter the digits one by one as elements in the list. Use the third list as the sum list. Be sure to carry if the sum of the two corresponding digits is 10 or more.

7) Do problem 6) using two lists instead of three.

✓ 8) Use three lists to multiply two 10-digit numbers digit by digit. (Could this be done with two lists?)

9) Modify program MAMD12 to find the remainder after dividing the value of S by 12 to replace the subroutine that uses successive subtraction.

10) Write a program to do arithmetic mod 5 and mod 6, five problems each. Put 5 and 6 in a data line and write one random function so that it generates 0 to 4 for mod 5 and 0 to 5 for mod 6.

11) Have the computer print the addition table and the multiplication table for mod 6.

12) Have the computer do subtraction mod 7.

13) Write a program in which the mod and the number of problems are selected at random, and the problems are generated with random data.

14) Have the computer generate pairs of integers and find the greatest common factor.

15) Have the computer generate sets of three integers and find the greatest common factor.

16) Generate pairs of integers and find the least common multiple.

17) Generate sets of four integers and treat them as coefficients of two binomials and find the three coefficients of the product; i.e., generate A, B, C, and D in $(AX + B)(CX + D)$ and find E, F, and G in $EX ** 2 + FX + G$. Print all five numbers in two groups, one group for A, B, C, and D and another for E, F, and G.

✓ 18) Form two 20-element lists with integers in the same range. Form two other lists. One list is to contain all numbers that appear in both lists, i.e., the intersection of the two lists. The other list is to contain a number if it is in either of the original two lists, but only entering it once if it is in both lists. In other words, find the union.

19) Fill a 25-element list with the first 25 positive odd integers. Fill a second 25-element list with the sum of all the entries of the first list up to and including the subscript number of the second list.

20) Modify CLOCK1 to handle times in hours and minutes.

CHAPTER 5

Elementary Data Processing

5-1 INTRODUCTION TO DATA PROCESSING

One of the very common uses of computers is for data processing. There is no clear cut definition for data processing that distinguishes it from other kinds of computer activity. In a sense, all computer work is data processing. However, data processing often implies that the computer is being used to sort, collate, tabulate, and/or otherwise process data. Such activities as processing questionnaires fall in this category.

Tabulating One Item

Let us ask some families how many television sets they have in their homes. The answers will be numbers, one number per family. We can set up a list so that the first element counts the number of families with one set and the Nth element counts the number of families with N sets. Before we begin counting, there will be zero families having each number of sets. So we will have to initialize each element of the list at 0. Then when the number for a family is read, we will add 1 to the element in the list corresponding to that number of television sets. If the first family has one set, then we have the computer look at $T[1]$. $T[1] = 0$ to start, and adding 1 makes $T[1] = 1$. The next time a family has one set we have the computer add 1 to $T[1]$, and then $T[1]$ will equal 2. The process is repeated until all data is read. We will have to use dummy data, since we want to print the results only after we have tabulated all data. We can draw a simple flowchart. See Fig. 5-1.

Of course we could allow for a larger number of sets by simply using a longer list. We could have provided for zero sets by letting $T[1]$ tabulate 0, $T[2]$ tabulate 1, $T[3]$ tabulate 2, etc. Then line 60 in program TV'S would read

```
60 LET  $T[N + 1] = T[N + 1] + 1$ 
```

because, when N is 0, you want $T[1]$ and when N is 1, you want $T[2]$, etc. Or we could use 0 subscripts if they are available.

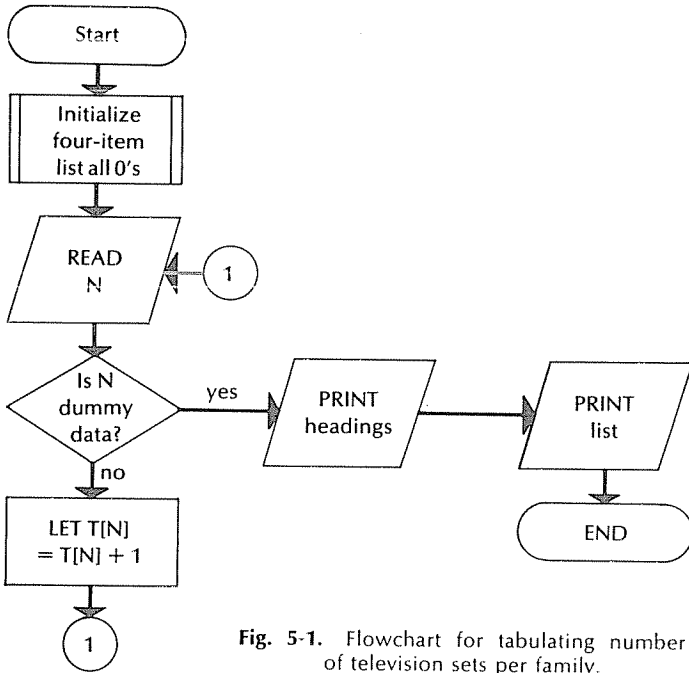


Fig. 5-1. Flowchart for tabulating number of television sets per family.

TV'S

```

10 FOR I=1 TO 4
20 LET T(I)=0
30 NEXT I
31 REM EACH ELEMENT IN THE LIST IS NOW ZERO
40 READ N
49 REM TEST FOR THE END OF DATA
50 IF N=-1 THEN 80
59 REM INCREASE THE TABULATING ELEMENT FOR N SETS BY ONE
60 LET T(N)=T(N)+1
70 GOTO 40
80 PRINT "NO. OF TV'S","NO. OF FAMILIES"
89 REM NOW PRINT THE NUMBER OF SETS AND THE NUMBER OF FAMILIES
90 FOR I=1 TO 4
100 PRINT I,T(I)
110 NEXT I
498 REM EACH ITEM OF DATA IS THE NUMBER OF TV'S IN ONE FAMILY
500 DATA 1,3,4,1,2,1,3,1,1,2,4,1,3,1,2,4,1,3,1,1,1,4,1,3,2,
2,1,2
510 DATA 2,1,3,3,2,2,1,1,1,2,2,3,4,4,2,4,1,4,2,4,2,1,2,1
520 DATA -1
999 END
RUN
TV'S

```

NO. OF TV'S	NO. OF FAMILIES
1	20
2	15
3	8
4	9

DONE

There are some more things that we can do with TV'S. We might have the computer count the number of families or count the total number of television sets. These figures may be computed as the data is being read. There can be a counting statement $\text{LET } C = C + 1$ somewhere between lines 50 and 70, and there can be a summing statement in the same part of the program. $\text{LET } S = S + N$ will total the number of sets. Then as long as we have the total number of sets and the total number of families, we might just as well compute the average number of sets per family. These are left as exercises.

Tabulating Several Items

With just a few modifications TV'S can be extended to handle data pertaining to several different things.

Suppose in taking a census, we ask not only how many television sets the family has, but also how many cars, homes, and bathrooms. All that is necessary is to have four counting lists instead of one. We need one list for each item being counted. In lines 10, 20, and 30 we initialize four lists at 0 for up to eight items in any one category. This could be more or less for any particular problem. We check for dummy data in line 50 and then update the four lists in lines 60 through 90. In the printing routine, I determines the element number in each list and so is the number of items in each list. $T[I]$ is the number of families that have I television sets, $C[I]$ is the number of families that have I cars, etc. See program TCHB.

From the results we see that there were nine families with one car, seven families with two television sets, etc. We could also do more data processing in TCHB. We could find the average number of cars per family, etc.

Tabulating Yes-No Answers

We are not limited to numerical quantities. Suppose you were to question each of your classmates about courses they want to take. If you ask, "Do you want to take chemistry?" and the answer is "no," you can call that 0, and similarly call "yes" 1. Let us ask people if they want to take the following courses: chemistry, physics, French, Spanish, calculus. If someone says he wants to take chemistry, French, and Spanish, his data will be: 1, 0, 1, 1, 0. We can use one list to count all courses. The first element of the list will count people who want to take chemistry, the second will count people who want to take French, etc. Before reading any data, we will have to initialize each element of the list at 0. Then after reading the first person's data, we want the list to be 1, 0, 1, 1, 0, which can be done by adding the number representing yes or no to the number already in that location of the list. We can get the computer to read the data in groups of five by using a loop $\text{FØR } R = 1 \text{ TØ } 5$, with the READ statement and the tabulating statement inside. The real works of the program will be the tabulating statement

$\text{LET } C[R] = C[R] + K$

where R is the loop available and goes from 1 to 5 for each person's data. If $R = 1$, the course is chemistry; if $R = 2$, the course is physics, etc. Where K is

TCHB

```

10  FOR I=1 TO 8
20  LET T(I)=C(I)=H(I)=B(I)=0
30  NEXT I
31  REM ALL TABULATING LISTS ARE INITIALIZED AT ZERO
40  READ T,C,H,B
49  REM CHECK FOR DUMMY DATA
50  IF T=-1 THEN 110
59  REM 60 TO 90 ENTER THE LATEST DATA IN THE FOUR LISTS.
60  LET T(I)=T(I)+1
70  LET C(I)=C(I)+1
80  LET H(I)=H(I)+1
90  LET B(I)=B(I)+1
100  GOTO 40
109  REM HERE THE HEADINGS ARE PRINTED
110  PRINT "NUMBER,TV'S, CARS, HOMES,BATHS"
119  REM HERE THE RESULTS ARE PRINTED
120  FOR I=1 TO 8
130  PRINT I,T(I),C(I),H(I),B(I)
140  NEXT I
349  REM EACH GROUP OF FOUR NUMBERS IS FOR ONE FAMILY- T,C,H,B
350  DATA 1,1,1,1,2,1,1,2,3,2,1,2,4,3,2,8,4,2,1,5
355  DATA 2,1,1,3,1,1,1,3,2,1,1,2,1,1,1,1,2,1,1,1
360  DATA 2,2,2,6,1,1,1,4,3,4,2,6,1,2,1,2,2,2,2,8
365  DATA 2,1,1,2,-1,0,0,0
400  END
RUN
TCHB

```

NUMBER, TV'S, CARS, HOMES, BATHS

1	5	9	12	3
2	7	5	4	5
3	2	1	0	2
4	2	1	0	1
5	0	0	0	1
6	0	0	0	2
7	0	0	0	0
8	0	0	0	2

DONE

0 this person does not want to take the course, and where K is 1 he does. So when $K = 0$, the tabulating statement adds 0 to the previous value in the C list, which does not change the number there. This is what we want for the person who does not want to take the course. However, if $K = 1$, then the tabulating statement adds 1 to the previous value of the entry in the C list, which is exactly what we want the computer to do for a person wanting to take the course. Again the dummy data is -1.

From CØURS1, we can easily see that seven people want to take chemistry, five people want to take physics, etc.

One last thing we might try to consider in this section is getting larger amounts of data in a program similar to CØURS1. Suppose you want to see what results might look like for say 500 people. Well, you could ask 500 people and then type out all that data. Or you could generate random data, with the understanding that the results will be random and may not simulate the real situation. However, knowing that the numbers will be random will help you spot serious errors if there are any. For 500 people and random data, each course should draw about 250 yeses. If the results show 96 or 600 yeses

```

COURS1

10 FOR I=1 TO 5
20 LET C(I)=0
30 NEXT I
40 FOR R=1 TO 5
50 READ K
60 IF K=-1 THEN 100
70 LET C(R)=C(R)+K
80 NEXT R
90 GOTO 40
100 PRINT "CHEMISTRY", "PHYSICS", "FRENCH", "SPANISH", "CALCULUS"
110 FOR I=1 TO 5
120 PRINT C(I),
130 NEXT I
990 REM DATA IS IN ORDER CHEMISTRY PHYSICS FRENCH SPANISH
    CALCULUS
995 REM '1' MEANS YES '0' MEANS NO
1000 DATA 1,0,1,1,0,0,0,1,1,0,1,1,1,1,0,0,1,1,0,1,1,0,0,1
1010 DATA 0,1,1,0,1,0,0,0,1,0,1,1,0,1,0,1,1,0,0,1,1,0,0,1
1020 DATA 0,0,1,0,1,1,0,1,0,1,0,0
1100 DATA -1
9999 END
RUN
COURS1

CHEMISTRY      PHYSICS      FRENCH      SPANISH      CALCULUS
7              5              7              6              6

```

DONE

in some course, then you must search for the error. One nice thing about using random data is that you do not have any data to type in. So in CØURS1 we may eliminate lines 1000, 1010, 1020, and 1100. Now the REM statements are not quite relevant. Line 60 can be deleted as we are not testing for dummy data and line 50 is deleted as we are not going to read data anymore. Line 90 will be taken care of by putting in a loop 1 to 500 to simulate 500 people. To get random numbers 0 or 1 we need $\text{INT}(2 * \text{RND}(1))$. The initializing, the tabulating, and the printing of CØURS1 can be used in the new program CØURS2, where the results are reasonably close to 250.

SUMMARY

We have seen lists used to analyze data from questionnaire-type questions having numerical or yes-no type answers. The tabulating may be done using one or several lists depending on the problem itself. Random numbers may be used to try out such programs with many numbers. The random nature of these numbers may help to spot serious program errors, which might not show up with small amounts of data unless you check the totals by hand.

PROBLEMS FOR SEC. 5-1

1) Modify program TV'S to total the number of television sets and the number of families, and find the average number of sets per family rounded off to the nearest hundredth.

CØURS2

```

10 FOR I=1 TO 5
20 LET C(I)=0
30 NEXT I
33 REM THIS LOOP SIMULATES 500 PEOPLE
35 FOR X=1 TO 500
40 FOR R=1 TO 5
42 REM THIS LOOP LOOKS AT FIVE COURSES FOR EACH PERSON
48 REM PICK A RANDOM NUMBER ZERO OR ONE
50 LET K=INT(2*RND(1))
70 LET C(R)=C(R)+K
78 REM NEXT COURSE
80 NEXT R
88 REM NEXT PERSON
90 NEXT X
100 PRINT "CHEMISTRY","PHYSICS","FRENCH","SPANISH","CALCULUS"
110 FOR I=1 TO 5
120 PRINT C(I),
130 NEXT I
9999 END
RUN
CØURS2

```

CHEMISTRY	PHYSICS	FRENCH	SPANISH	CALCULUS
253	257	237	249	256

DØNE

2) Modify program CØURS1 to find the number of people who want to take chemistry and physics.

3) Modify CØURS2 to generate twice as many yeses as nos.

4) Modify CØURS1 to find the number of people who want to take physics but not calculus.

✓ 5) Consider a questionnaire in which there are 14 questions which call for yes, no, or other answers. Let 1 be yes, 2 be no, and 3 be other. Set up three separate lists for yes, no, and other. Generate 25 sets of 14 numbers 1, 2, or 3 and find the number of each type of answer for each question number. Print the results in decipherable form.

6) Modify CØURS2 to generate yes-to-no answers in a ratio of 3 to 4.

5-2 ARRAYS

So far we have only been able to store numbers in a simple variable or in a list. There will be situations where we will want to store more numbers than is convenient in a list. While we have seen that we can use several lists very effectively, BASIC provides a two-dimensional list for such situations. It may be called an *array*. You may think of an array as being similar to a checkerboard. Instead of the familiar single subscript we have been using for lists, we will need double subscripts; one for rows and the other for columns. (As with lists, computers vary. Some will allow 0 subscripts, others begin with 1.) For an array designated as A, A[1, 1] is the number in the upper lefthand corner. (In some cases, it will be A[0, 0].) A[1, 2] indicates the number in row 1 and column 2; A[5, 8] indicates the number in row 5 and column 8, etc. In other words, the first subscript indicates the row starting at the top and the

second subscript indicates the column starting at the left. Thus, $A[R, C]$ indicates the number in row R and column C .

An array is just a set of numbers arranged in columns and rows. This perfectly matches the printed result in program TCHB in Sec. 5-1. We may use each column of an array in the same manner that we used each list in that program, and we can use each row to keep track of the number of families having that number of the item being tabulated. But before we tackle TCHB in an array, we should see a little more how arrays operate.

Very often we will use a nested loop, with one loop taking the computer through the columns and the other loop going through the rows. The structure of an array is shown in Table 5-1. For students without 0 subscripts, consider the dashed outline to exclude the 0 row and 0 column. For students who have 0 subscripts, consider the dashed outline to suggest that it is optional whether or not you use them at this time.

TABLE 5-1. ARRAY STRUCTURE.

[0, 0]	[0, 1]	[0, 2]	[0, 3]	[0, 4]	[0, 5]
[1, 0]	[1, 1]	[1, 2]	[1, 3]	[1, 4]	[1, 5]
[2, 0]	[2, 1]	[2, 2]	[2, 3]	[2, 4]	[2, 5]
[3, 0]	[3, 1]	[3, 2]	[3, 3]	[3, 4]	[3, 5]

ARRAY1

```

9  REM  INITIALIZE A AT ONE
10 LET A=1
19 REM  ROWS GO FROM 1 TO 3
20 FOR R=1 TO 3
29 REM  COLUMNS GO FROM 1 TO 5
30 FOR C=1 TO 5
40 LET T[R,C]=A
50 LET A=A+1
59 REM  NEXT COLUMN
60 NEXT C
69 REM  NEXT ROW
70 NEXT R
80 PRINT "AT THIS POINT THE ARRAY IS FILLED"
999 END
RUN
ARRAY1

AT THIS POINT THE ARRAY IS FILLED

DONE

```

It is time for another demonstration program. In ARRAY1 we simply fill a 3-row by 5-column array with integers 1 through 15 going first across the

page and then down, just as we read the printed page. In this program we have called the array T. Any letter of the alphabet may be used. However, do not use the same letter to name both a list and an array in the same program. This is because the computer treats a list as an array with just one column or one row, depending on the computer.

We have filled the array just as the printed message states. However, as was noted in Chap. 1, in order for the work of the computer to be useful, we must eventually get back from the computer some printed results. Note that we say eventually. The more advanced we get in programming, the more we will do things that are not immediately printed. Nonetheless, just to restore your faith in the computer, let us ask it to print some values from the array we just created. After line 80 we will insert a variety of printing

ARRAY2

```

9  REM INITIALIZE A AT ONE
10 LET A=1
19  REM   ROWS GO FROM 1 TO 3
20 FOR R=1 TO 3
29  REM   COLUMNS GO FROM 1 TO 5
30 FOR C=1 TO 5
40 LET T(R,C)=A
50 LET A=A+1
59 REM NEXT COLUMN
60 NEXT C
69 REM NEXT ROW
70 NEXT R
80 PRINT "AT THIS POINT THE ARRAY IS FILLED"
85 PRINT
89 REM LET'S PRINT T(3,4)
90 PRINT "T(3,4) ="; T(3,4)
100 PRINT
110 PRINT "WHO LIVES AT (2,5)?"; T(2,5); "LIVES THERE"
120 PRINT
130 PRINT "LET'S LOOK AT THE ENTIRE ARRAY"
139 REM INCREMENT ROWS
140 FOR R=1 TO 3
149 REM INCREMENT COLUMNS
150 FOR C=1 TO 5
160 PRINT T(R,C);
170 NEXT C
175 PRINT
176 PRINT
180 NEXT R
999 END
RUN
ARRAY2

```

AT THIS POINT THE ARRAY IS FILLED

T(3,4) = 14

WHO LIVES AT (2,5)? 10 LIVES THERE

LET'S LOOK AT THE ENTIRE ARRAY

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15

DONE

with labels and comments much as we did earlier in the introduction to lists. See ARRAY2.

The elements of an array constitute variables just as do the elements of a list. We may operate on any element or elements in the array we choose. Consider ARRAY3.

ARRAY3

```

10 LET A=1
20 FOR R=1 TO 3
30 FOR C=1 TO 5
40 LET A[R,C]=A
50 LET A=A+1
60 NEXT C
70 NEXT R
90 PRINT "WE PRINT THE ORIGINAL ARRAY"
100 GOSUB 900
110 PRINT "WE CAN MULTIPLY EVERY ELEMENT IN THE 4TH COLUMN
    BY 6"
120 FOR R=1 TO 3
130 LET A[R,4]=A[R,4]*6
140 NEXT R
150 GOSUB 900
160 PRINT "WE CAN SUBTRACT THE 3RD ROW FROM THE 2ND ROW"
170 PRINT "AND PUT THE RESULT IN THE 3RD ROW"
180 FOR C=1 TO 5
190 LET A[3,C]=A[2,C]-A[3,C]
200 NEXT C
210 GOSUB 900
880 STOP
890 REM ****PRINTING SUBROUTINE IS HERE****
900 FOR R=1 TO 3
910 FOR C=1 TO 5
920 PRINT A[R,C];
930 NEXT C
940 PRINT
950 PRINT
960 NEXT R
970 RETURN
999 END
RUN
ARRAY3

```

WE PRINT THE ORIGINAL ARRAY

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15

WE CAN MULTIPLY EVERY ELEMENT IN THE 4TH COLUMN BY 6

1	2	3	24	5
6	7	8	54	10
11	12	13	84	15

WE CAN SUBTRACT THE 3RD ROW FROM THE 2ND ROW
AND PUT THE RESULT IN THE 3RD ROW

1	2	3	24	5
6	7	8	54	10
-5	-5	-5	-30	-5

DONE

We can even change the size of the array during a program. In ARRAY4 we begin with the original 3 by 5 array of ARRAY3 and tack on an extra row to enter the sums of the entries in the first three columns. Notice that in both ARRAY3 and ARRAY4 we are able to use GOSUB to save writing the printing routines more than once.

You should begin to see that we have exactly the same control over the contents of an array that we do over the contents of a list.

Now let us look again at our census program TCHB. There we used an 8-row by 5-column array in which the first column simply contained the row number and the other four columns each contained tabulated results for a different item. We may now put the READ statement in a loop going from 2 to 5 and let the loop variable determine the column in which the tabulation takes place. The other features of the program are procedures that we have used before. See TCHB+.

ARRAY4

```

10 LET A=1
20 FOR R=1 TO 3
30 FOR C=1 TO 5
40 LET A(R,C)=A
50 LET A=A+1
60 NEXT C
70 NEXT R
80 PRINT "HERE IS THE ORIGINAL ARRAY!"
100 FOR R=1 TO 3
110 FOR C=1 TO 5
120 PRINT A(R,C);
130 NEXT C
140 PRINT
150 PRINT
160 NEXT R
168 REM SET ALL ELEMENTS IN THE 4TH ROW TO ZERO
170 FOR I=1 TO 5
180 LET A(4,I)=0
190 NEXT I
200 PRINT "NOW WE HAVE THE 4 BY 5 ARRAY:"
210 GOSUB 500
219 REM THIS ROUTINE ADDS COLUMNS AND PUTS THE SUM IN THE 4TH
    ROW
220 FOR C=1 TO 5
230 FOR R=1 TO 3
240 LET A(4,C)=A(4,C)+A(R,C)
250 NEXT R
260 NEXT C
270 PRINT "THE FOURTH ROW CONTAINS THE SUMS OF THE FIRST 3
    ROWS."
280 GOSUB 500
490 STOP
498 REM **THIS IS THE PRINTING ROUTINE FOR THE 4 BY 5 ARRAY**
500 FOR R=1 TO 4
510 FOR C=1 TO 5
520 PRINT A(R,C);
530 NEXT C
540 PRINT
550 PRINT
560 NEXT R
570 RETURN
999 END

```

```
RUN
ARRAY 4
```

```
HERE IS THE ORIGINAL ARRAY!
```

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15

```
NOW WE HAVE THE 4 BY 5 ARRAY:
```

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
0	0	0	0	0

```
THE FOURTH ROW CONTAINS THE SUMS OF THE FIRST 3 ROWS.
```

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
18	21	24	27	30

```
DONE
```

```
TCHB+
```

```
10 FOR R=1 TO 8
14 REM HERE THE ROW NUMBER IS ENTERED IN THE FIRST COLUMN
15 LET S(R,1)=R
20 FOR C=2 TO 5
30 LET S(R,C)=0
40 NEXT C
50 NEXT R
68 REM WE ARE ENTERING FIGURES IN COLUMNS 2 THROUGH 5 ONLY
70 FOR C=2 TO 5
80 READ N
85 IF N=-1 THEN 110
88 REM N DETERMINES THE ROW NUMBER WHICH KEEPS TRACK OF N
   ITEMS
90 LET S(N,C)=S(N,C)+1
100 NEXT C
105 GOTO 70
110 PRINT "NUMBER, TV'S, CARS, HOMES, BATHS"
119 REM HERE THE RESULTS ARE PRINTED
120 FOR R=1 TO 8
130 FOR C=1 TO 5
140 PRINT S(R,C);
150 NEXT C
155 PRINT
160 NEXT R
349 REM EACH GROUP OF FOUR NUMBERS IS FOR ONE FAMILY- T,C,H,B
350 DATA 1, 1, 1, 1, 2, 1, 1, 2, 3, 2, 1, 2, 4, 3, 2, 8, 4, 2, 1, 5
355 DATA 2, 1, 1, 3, 1, 1, 1, 1, 3, 2, 1, 1, 2, 1, 1, 1, 1, 2, 1, 1
360 DATA 2, 2, 2, 6, 1, 1, 1, 4, 3, 4, 2, 6, 1, 2, 1, 2, 2, 2, 2, 8
365 DATA 2, 1, 1, 2, -1, 0, 0, 0
400 END
```

```
RUN
TCHB+
```

NUMBER	TV'S	CARS	HOMES	BATHS
1	5	9	12	3
2	7	5	4	5
3	2	1	0	2
4	2	1	0	1
5	0	0	0	1
6	0	0	0	2
7	0	0	0	0
8	0	0	0	2

```
DONE
```

SUMMARY

We may now use a powerful extension of the list concept, the array. An array may be thought of as an arrangement of numbers in which there are rows and columns. Numbers in an array may be accessed by designating the location by a double subscript such as $H[3, 7]$ for the number in array named H which is located in the row numbered 3 and the column numbered 7. As you may have guessed, you will not need a DIMENSION statement as long as you do not exceed a subscript of $[10, 10]$.

PROBLEMS FOR SEC. 5-2

- 1) Print an array with 3 rows and 6 columns filled with 0's.
- 2) Print an array with 6 rows and 3 columns filled with 1's.
- 3) Set up an array with 4 rows and 9 columns and fill it with random numbers from -999 to +999. Print the array.
- 4) Fill the addresses along the top left to bottom right diagonal of a square 7 by 7 array with 1's and all other locations with 0's and print the result.
- 5) Fill two arrays of the same dimensions with random integers and print each array. Then fill a third array with the sums of the corresponding entries from the first two and print the result.
- 6) Fill two arrays of the same dimensions with random integers and print each array. Then fill one of these two arrays with the sums of the corresponding entries from each array and print the result.
- 7) Fill a 3 by 7 array with the integers 0 through 20. Print that array. Then multiply each entry by the sum of the row number and the column number and print the result.
- 8) Fill a 4 by 7 array with random integers from -500 to +500 and print the result. Then multiply each entry by 2 and print that result. Insert the printing routine using GOSUB.
- 9) Fill a 10 by 10 array with the addition table.
- 10) Fill a 10 by 10 array with the multiplication table.
- 11) Fill a 5 by 5 array with the addition table mod 5. Then have the computer generate addition problems with a random number function and find the sum by accessing the appropriate entry in the addition array.
- 12) Do problem 11) for the multiplication table mod 5.
- ✓ 13) Consider a questionnaire containing 10 questions with yes, no, or other as the

three possible answers. Generate random data and print the results in a 10 by 4 array. Use the first column for the question number and the other three for yes, no, or other. Have the computer generate 50 questionnaires.

5-3 A MORE DETAILED QUESTIONNAIRE ANALYSIS

Consider a questionnaire submitted to four categories of people: male—21 or over, male—under 21, female—21 or over, and female—under 21. On this questionnaire there are 15 questions calling for yes-no answers. Our task is to present a tabulated summary of the data collected. We can provide sample data for say 10 people for the purpose of getting a first test RUN. Let us refer to this first problem and the program as SURVEY. The flowchart for SURVEY is drawn in Fig. 5-2.

The first computer problem we run into is, how do we get 15 rows in an array? The answer is that we may dimension an array much the same as we dimensioned lists. In the array DIM (DIMension) statement, we must specify

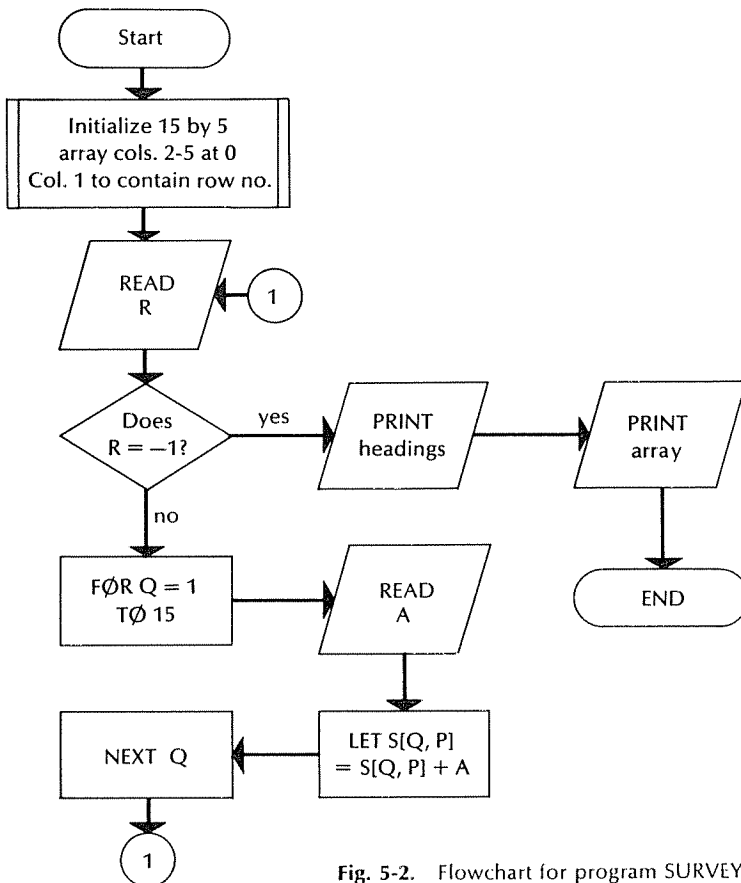


Fig. 5-2. Flowchart for program SURVEY.

two dimensions: one for rows and one for columns. We want an array with 15 rows and 5 columns (4 for categories and 1 for the question numbers). DIM S[15, 5] will provide just such an array.

DIM (TWO-DIMENSIONAL)

DIM A[R, C] sets up an array designated as A with highest column number C and highest row number R. The statement is required if either R or C exceeds 10. Some computers require explicit integers, others allow variables in DIM statements.

In our questionnaire problem, there are three things that we must keep track of: 1) the category of the respondent, 2) the question number, and 3) the response. We may organize the data and results according to Table 5-2.

TABLE 5-2. CHART TO ORGANIZE SURVEY.

Array		Code in DATA Line
Column Number	Use	
1	Question number	Position in line
2	Male 21 or over	2
3	Male under 21	3
4	Female 21 or over	4
5	Female under 21	5

It will be easier to organize the data, if we reserve an entire data line for each person. Then we can put the category code (2 through 5) in the first location and the response (0 or 1) in the next 15 locations. A DATA line will look like this:

XXX DATA 4, 1, 0, 1, 1, 1, 0, 0, 1, 1, 0, 1, 0, 1, 0, 1

where the 4 indicates that the respondent is female and 21 or over, and the 1's and 0's mean yes and no in response to the 15 questions. We could count the number of people in advance or use dummy data so that the printing can be done after all data is read.

SURVEY

```
9 REM DIM S(15,5) SETS UP AN ARRAY WITH 'HIGHEST' LOCATION
  (15,5)
10 DIM S(15,5)
20 FOR R=1 TO 15
28 REM LINE 30 ENTERS THE ROW NUMBER IN THE FIRST COLUMN
30 LET S(R,1)=R
```

```

40 FOR C=2 TO 5
48 REM LINE 50 SETS THE LAST 4 COLUMNS AT ZERO
50 LET S(R,C)=0
60 NEXT C
70 NEXT R
78 REM 80 READS THE CATEGORY FOR THE NEXT PERSON IN THE SURVEY
80 READ P
90 IF P=-1 THEN 200
98 REM Q GOES THROUGH THE 15 QUESTIONS
100 FOR Q=1 TO 15
110 READ A
120 LET S(Q,P)=S(Q,P)+A
130 NEXT Q
138 REM LINE 140 SENDS THE COMPUTER BACK TO READ ANOTHER LINE
    OF DATA
140 GOTO 80
198 REM THE PRINTING BEGINS HERE
200 PRINT "QUEST MALE MALE FEMALEFEMALE"
210 PRINT "NUMBER 21+ UNDER 21+ UNDER"
220 FOR R=1 TO 15
230 FOR C=1 TO 5
250 PRINT S(R,C);
260 NEXT C
270 PRINT
280 NEXT R
498 REM ***A LINE LIKE 500 MAY HELP TO LINEUP THE DATA LINES
499 REM IN TYPING***
500 REM 1,1,1,1,1,1,1,1,1,1,1,1,1,1,1
501 DATA 4,1,0,1,1,1,0,0,1,1,0,1,0,1,0,1
502 DATA 4,1,0,0,0,0,0,1,1,0,1,1,0,0,0,1,1
503 DATA 3,1,1,1,1,0,0,0,1,0,1,0,0,1,1,0,0
504 DATA 5,1,1,1,0,0,0,1,0,0,0,1,1,1,1,0
505 DATA 2,1,1,1,0,0,0,1,0,1,0,0,1,1,1,1,0
506 DATA 5,0,0,1,0,1,0,0,0,1,1,1,0,0,1,1
507 DATA 5,0,0,0,1,1,1,0,1,0,1,0,1,0,1,0,1
508 DATA 2,0,0,1,1,0,0,1,1,0,1,0,1,0,1,0,0,1
509 DATA 4,1,1,1,1,1,1,1,0,0,0,1,0,1,0,0
510 DATA 2,1,1,0,0,1,0,1,0,0,0,0,1,1,1,1
900 DATA -1
999 END

```

RUN
SURVEY

QUEST	MALE	MALE	FEMALE	FEMALE
NUMBER	21+	UNDER	21+	UNDER
1	2	1	3	1
2	2	1	1	1
3	2	1	2	2
4	1	1	2	1
5	1	0	2	2
6	1	0	2	1
7	2	1	2	1
8	2	0	1	1
9	0	1	2	1
10	1	0	1	2
11	1	0	2	2
12	3	1	0	2
13	2	1	2	1
14	2	0	1	2
15	2	0	2	2

DONE

Notice in SURVEY that while there are four categories in the original problem, there are five additional categories generated by the conditions of the problem. They are male, female, under 21, 21 or over, and total. We may

further process the tabulated results after line 140 in SURVEY by totaling up the appropriate columns to get these latest categories tabulated. Of course, we will have to change the DIM statement to DIM S[15, 10]. This is done in SRVEY1. Study lines 145 through 190 carefully to assure yourself that the correct values are being tabulated there.

There are many other results that we might try to find. There are other

SRVEY1

```

10 DIM S[15, 10]
20 FOR R=1 TO 15
28 REM LINE 30 ENTERS THE ROW NUMBER IN THE FIRST COLUMN
30 LET S[R,1]=R
40 FOR C=2 TO 10
48 REM LINE 50 SETS THE LAST 9 COLUMNS AT ZERO
50 LET S[R,C]=0
60 NEXT C
70 NEXT R
78 REM 80 READS THE CATEGORY FOR THE NEXT PERSON IN THE SURVEY
80 READ P
90 IF P=-1 THEN 145
98 REM 0 GOES THROUGH THE 15 QUESTIONS
100 FOR Q=1 TO 15
110 READ A
120 LET S[Q,P]=S[Q,P]+A
130 NEXT Q
138 REM LINE 140 SENDS THE COMPUTER BACK TO READ ANOTHER LINE
    OF DATA
140 GOTO 80
145 FOR R=1 TO 15
150 LET S[R,6]=S[R,2]+S[R,3]
160 LET S[R,7]=S[R,4]+S[R,5]
170 LET S[R,8]=S[R,3]+S[R,5]
180 LET S[R,9]=S[R,2]+S[R,4]
185 LET S[R,10]=S[R,6]+S[R,7]
190 NEXT R
198 REM THE PRINTING BEGINS HERE
200 PRINT "QUEST MALE MALE FEMALEFEMALE"
210 PRINT "NUMBER 21+ UNDER 21+ UNDER MALE FEMALE UNDER
    21+";
211 PRINT " TOTAL"
220 FOR R=1 TO 15
230 FOR C=1 TO 10
250 PRINT S[R,C];
260 NEXT C
270 PRINT
280 NEXT R
498 REM ***A LINE LIKE 500 MAY HELP TO LINEUP THE DATA LINES
499 REM IN TYPING***
500 REM 1,1,1,1,1,1,1,1,1,1,1,1,1,1,1
501 DATA 4,1,0,1,1,1,0,0,1,1,0,1,0,1,0,1
502 DATA 4,1,0,0,0,0,1,1,0,1,1,0,0,0,1,1
503 DATA 3,1,1,1,1,0,0,1,0,1,0,0,1,1,0,0
504 DATA 5,1,1,1,0,0,0,1,0,0,0,1,1,1,1,0
505 DATA 2,1,1,1,0,0,1,0,1,0,0,1,1,1,1,0
506 DATA 5,0,0,1,0,1,0,0,0,1,1,1,0,0,1,1
507 DATA 5,0,0,0,1,1,1,0,1,0,1,0,1,0,1,0
508 DATA 2,0,0,1,1,0,0,1,1,0,1,0,1,0,0,1
509 DATA 4,1,1,1,1,1,1,1,0,0,0,1,0,1,0,0
510 DATA 2,1,1,0,0,1,0,1,0,0,0,0,1,1,1,1
900 DATA -1
999 END

```

RUN
SRVEY1

QUEST NUMBER	MALE 21+	MALE UNDER	FEMALE 21+	FEMALE UNDER	FEMALE MALE	FEMALE UNDER	21+	TOTAL
1	2	1	3	1	3	4	2	5
2	2	1	1	1	3	2	2	3
3	2	1	2	2	3	4	3	4
4	1	1	2	1	2	3	2	3
5	1	0	2	2	1	4	2	3
6	1	0	2	1	1	3	1	3
7	2	1	2	1	3	3	2	4
8	2	0	1	1	2	2	1	3
9	0	1	2	1	1	3	2	2
10	1	0	1	2	1	3	2	2
11	1	0	2	2	1	4	2	3
12	3	1	0	2	4	2	3	3
13	2	1	2	1	3	3	2	4
14	2	0	1	2	2	3	2	3
15	2	0	2	2	2	4	2	4

DONE

totals that could be tabulated. At the time P is read, we could total the number of people in each of the original four categories and enter these totals in row 16. Then we could compute averages. There are numerous ratios that we could evaluate. We could have the computer generate random data to get larger numbers in the printed result. That would require random integers 2 through 5 for P in line 80 and random 0 or 1 in line 110 for the yes-no responses.

SUMMARY

We see that the two-dimensional array permits tremendous flexibility. We may determine its size exactly. The array serves as a vast storage area for large amounts of data or tabulated results. We may process the contents of an array and enter results in other parts of the same array with tremendous maneuverability.

The DIM statement may be used to specify subscripts greater than 10 in the two-dimensional array much as it was used for lists.

PROBLEMS FOR SEC. 5-3

- 1) Modify SURVEY to handle 75 questionnaires with random data.
- 2) Modify SRVEY1 to tabulate the totals discussed with that program in the 16th row of the S array.
- 3) Modify SURVEY to handle yes, no, and other as possible answers. Create three arrays: one for yes, a second for no, and a third for other responses. Use random data and 50 questionnaires.
- 4) Modify SRVEY1 to generate random data for 50 questionnaires.
- 5) Modify SRVEY1 to tabulate the results as percentages of the total number of yes responses. Do not create a second array.

6) Fill an array with the multiplication table up to 12×12 , and print the last three rows.

✓ 7) In a 12 by 12 array enter all 1's in the upper left to lower right diagonal and the left-most column, and all 0's elsewhere. Then beginning in the third row, second column, enter the sum of the entry in the same column of the row immediately above and in the column one to the left and the row immediately above, through the 12th row, 11th column. Print the result.

CHAPTER 6

Specific Applications

6-1 EUCLIDEAN ALGORITHM

In Chap. 4 when we first reduced common fractions to lowest terms, even though the computer did the work, it was done the hard way.

For two integers N and D ,

$$N/D = I + R/D$$

or
$$N = I \circ D + R$$

where I is the integer quotient and R is the remainder. If we successively divide the remainder into the previous divisor until the remainder is 0, the last divisor is the greatest common factor. This will always happen, even for mutually prime pairs, as the last divisor will be 1.

Let us see what happens for 13398 and 7854.

$$N = I \circ D +$$

$$13398 = (1)[7854] + \quad (6-1)$$

$$7854 = (1)[5544] + 2310 \quad (6-2)$$

$$5544 = (2)[2310] + 924 \quad (6-3)$$

$$2310 = (2)[924] + 462 \quad (6-4)$$

$$924 = (2)[462] + 0 \quad (6-5)$$

According to Euclid the greatest common factor of 13398 and 7854 is 462, because 462 was the divisor when the remainder was 0. Indeed $13398 = 29 \circ 462$ and $7854 = 17 \circ 462$. That took only five tries. How many would it have taken using the old method? Now all we have to do is figure out why it works.

Look carefully at Eq. (6-5). 924 is divisible by 462 because the remainder is 0 and 0 is divisible by any nonzero number. This 0 remainder is the key to the entire proposition. Now look at Eq. (6-4). Since 924 is divisible by 462, so is $(2)[924] + 462$, which makes 2310 divisible by 462. Now look at Eq. (6-3).

Since 2310 and 924 are both divisible by 462, so is 5544. This makes 7854 divisible by 462, which in turn makes 13398 divisible by 462, which is the original contention. The argument we have just presented is hardly a proof of the Euclidean algorithm, but it should be convincing.

Now, how do we get the computer to carry out this process? First, from Eqs. (6-1) through (6-5) we should see that we have simply taken the old divisor D and made it the dividend and the old remainder R and made it the divisor. So we will get the computer to LET $N = D$ and LET $D = R$ after we look at the remainder to see if it is 0. If the remainder is 0, we direct the computer to print the last divisor as it is the greatest common factor.

Now we should be able to draw the flowchart (Fig. 6-1) and write the program CØMFAC.

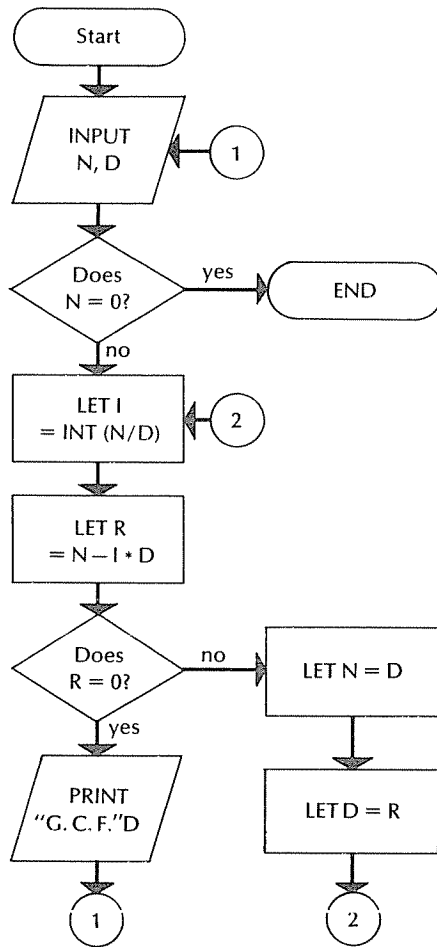


Fig. 6-1. Flowchart for using Euclidean algorithm for program CØMFAC.

COMFAC

```

10 PRINT "N,D";
20 INPUT N,D
25 IF N=0 THEN 120
28 REM FIND THE INTEGER QUOTIENT
30 LET I=INT(N/D)
38 REM FIND THE REMAINDER
40 LET R=N-I*D
48 REM IF THE REMAINDER IS ZERO THEN D IS THE G.C.F.
50 IF R=0 THEN 90
58 REM R WAS NOT ZERO, SO WE ITERATE
60 LET N=D
70 LET D=R
80 GOTO 30
90 PRINT "G.C.F. =" ; D
100 PRINT
110 GOTO 10
120 END
RUN
COMFAC

```

N,D?13398,922251
G.C.F. = 33

N,D?741279,922251
G.C.F. = 33

N,D?13398,7854
G.C.F. = 462

N,D?991,199
G.C.F. = 1

N,D?272851,246156
G.C.F. = 281

N,D?0,0

DONE

PROBLEMS FOR SEC. 6-1

1) Write a program to add fractions given the numerators and denominators. Print the sum reduced to lowest terms.

2) Do problem 1) for multiplication.

✓ 3) INPUT two pairs of coordinates. Have the computer find the slope and the Y-intercept of the straight line containing the points and print the results as rational numbers reduced to lowest terms. If the result is negative, have the numerator be the negative number.

4) As a project, write a program to factor quadratic expressions with integer coefficients. Be sure to allow for 0 coefficients and factor out greatest common factors of all three coefficients.

6-2 CHANGE BASE

In this section we are going to develop a program to convert base-10 numbers to base-2 numbers. You will recall that for base-2, only the digits 0 and 1 are permitted and each digit represents a power of 2 instead of 10.

One of the widespread uses for base-2 numbers is in computers themselves. This is because in base-2, all numbers may be expressed by a set of switches with 0 being *off* and 1 being *on*.

One difficulty that we quickly encounter is that whatever the digit capacity of the computer we have access to, that number of digits provides a much smaller number in base-2 than it does in base-10. We will use up to six digits in the base-10 number for our program. In base-2 100000 is only 32 base-10 and

$$\begin{array}{rcll}
 111111_2 = & 1 * 2^{**} 0 & \text{or} & 1 \\
 & + 1 * 2^{**} 1 & \text{or} & + 2 \\
 & + 1 * 2^{**} 2 & \text{or} & + 4 \\
 & + 1 * 2^{**} 3 & \text{or} & + 8 \\
 & + 1 * 2^{**} 4 & \text{or} & + 16 \\
 & + 1 * 2^{**} 5 & \text{or} & + 32 \\
 & & & \hline
 & & & 63_{10}
 \end{array}$$

which we could handle easily with pencil and paper. Clearly, we are going to have to work with more than six digits in base-2.

Let us assume that we can provide for as many digits as are needed. How many digits do we need to represent the base-10 number 999999 in base-2? We could write a program that would give that information, but we can also figure it out ourselves. We can begin with $2^{**} 5$.

$$\begin{aligned}
 2^{**} 5 &= 32 \\
 2^{**} 10 &= 32^{**} 2 = 1024 \\
 2^{**} 20 &= 1024^{**} 2 = 1048576
 \end{aligned}$$

So, if we provide for up to $2^{**} 20$, we can handle six-digit integers with room to spare. We know how many digits we need, now we have to figure out how to make the conversion.

Let us run a sample conversion before we attempt to write the program. We use 149 base-10 here. First find the greatest integer power of 2 that is less than 149. It is $2^{**} 7$ or 128.

$$149/2^{**} 7 = 1 + 21/2^{**} 7$$

$$\text{or } 149 = 1 * (2^{**} 7) + 21 \quad (6-6)$$

$$21 = 0 * (2^{**} 6) + 21 \quad (6-7)$$

$$21 = 0 * (2^{**} 5) + 21 \quad (6-8)$$

$$21 = 1 * (2^{**} 4) + 5 \quad (6-9)$$

$$5 = 0 * (2^{**} 3) + 5 \quad (6-10)$$

$$5 = 1 * (2^{**} 2) + 1 \quad (6-11)$$

$$1 = 0 * (2^{**} 1) + 1 \quad (6-12)$$

$$1 = 1 * (2^{**} 0) + 0 \quad (6-13)$$

By successive substitution we see that

$$\begin{aligned}
 149 = & 1 \cdot (2^{**} 7) \\
 & + 0 \cdot (2^{**} 6) \\
 & + 0 \cdot (2^{**} 5) \\
 & + 1 \cdot (2^{**} 4) \\
 & + 0 \cdot (2^{**} 3) \\
 & + 1 \cdot (2^{**} 2) \\
 & + 0 \cdot (2^{**} 1) \\
 & + 1 \cdot (2^{**} 0)
 \end{aligned}$$

So that

$$149_{10} = 10010101_2$$

Equation (6-6) may be written in general as

$$N = I \cdot (2^{**} E) + R$$

where N is the number, I is the integer quotient, E is the exponent on the base-2, and R is the remainder after integer division. Therefore

$$I = \text{INT}(N / (2^{**} E))$$

and, solving for R we get

$$R = N - I \cdot (2^{**} E)$$

Now, looking at Eqs. (6-6) through (6-13) we see that we have an iterative process in which the new number is to be the old remainder and the exponent on the base-2 is reduced by 1 until it gets to 0. This looks like a loop in which the loop variable is the exponent on the base-2 and stops at 0. Where does it start? Earlier we decided that the greatest exponent on 2 could be 20. Now we should be able to assemble our problem into a flowchart (Fig. 6-2).

BASE

```


10 READ N
20 PRINT N; "BASE TEN = ";
30 FOR E=20 TO 0 STEP -1
40 LET I=INT(N/2**E)
50 PRINT I;
60 LET R=N-I*2**E
70 LET N=R
80 NEXT E
85 PRINT "BASE TWO"
86 PRINT
90 GOTO 10
100 DATA 999999.,1,16
110 END
RUN
BASE

```

```

999999.    BASE TEN = 0    1    1    1    1    0    1    0
0      0      0      1      0      0      0      1      1      1
1      BASE TWO

```

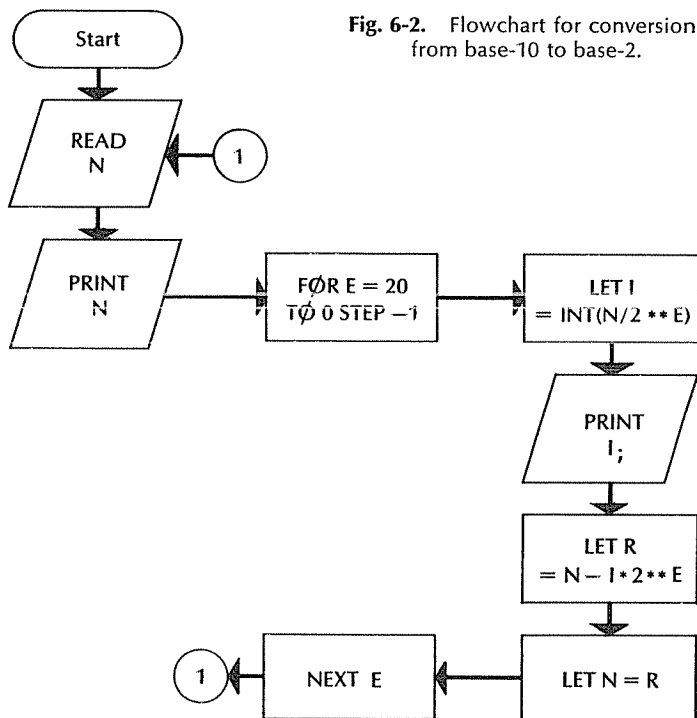

```

      1   BASE TEN = 0     0     0     0     0     0     0     0     0
      0       0         0    0     0     0     0     0     0     0     1
BASE TWO
      16   BASE TEN = 0     0     0     0     0     0     0     0     0
      0       0         0    0     0     0     0     1     0     0     0
BASE TWO
OUT OF DATA IN LINE 10
```

Looking carefully at the printed results in BASE, we can see that 16 base-10 does equal 000000000000000010000; however it is difficult to sort that out. Printing the variable I is controlled by semicolon spacing which will not place one-digit numbers in adjacent spaces. We can however, get the digits next to each other by printing them explicitly. If we say PRINT "1"; the next printed character will be printed in the next space. So, instead of 50 PRINT I; we insert

```
45 IF I=1 THEN 55
50 PRINT "0";
52 GOTO 60
55 PRINT "1";
```

and call for a RUN:

```
RUN
BASE-2

999999.      BASE TEN =011110100001000111111 BASE TWO

1      BASE TEN =000000000000000000001 BASE TWO

16     BASE TEN =000000000000000010000 BASE TWO

OUT OF DATA IN LINE 10
```

By not worrying too much about the fact that we were going to require a large number of digits, we have succeeded in printing numbers with 21 digits. Quite often in programming, as in any problem-solving situation, you will solve seemingly impossible problems by emphasizing those things that you can do rather than holding back because of all the things you think that you will be unable to handle.

Let us reassemble the program as it now stands in BASE-2 and insert another set of data just to see a few more results.

```
BASE-2

10 READ N
20 PRINT N;"BASE TEN =";
30 FOR E=20 TO 0 STEP -1
40 LET I=INT(N/2^E)
45 IF I=1 THEN 55
50 PRINT "0";
52 GOTO 60
55 PRINT "1";
60 LET R=N-I*2^E
70 LET N=R
80 NEXT E
85 PRINT " BASE TWO"
86 PRINT
90 GOTO 10
100 DATA 999999.,1,16
110 END
100 DATA 45,9875,123456
RUN
BASE-2

45     BASE TEN =000000000000000101101 BASE TWO

9875   BASE TEN =000000010011010010011 BASE TWO

123456. BASE TEN =000011110001001000000 BASE TWO

OUT OF DATA IN LINE 10
```

Of course we really are not finished with the program yet. We should eliminate the leading 0's. Then the printed results will be in more familiar form. This is left as an exercise.

PROBLEMS FOR SEC. 6-2

- 1) Eliminate the leading 0's in BASE-2. Be careful not to eliminate all 0's.
- 2) Write a program to convert base-2 numbers to base-10. It may help to put the digits of the base-2 number in a list.
- 3) Write a program to add two numbers in base-2.
- 4) Have the computer convert numbers in base-10 to base-3.
- ✓ 5) Write a program to convert from base-10 to base-12. It is conventional to use T for 10 and E for 11 in base-12.
- ✓ 6) Have the computer convert base-3 numbers to base-2.
- ✓ 7) Write a program to convert base-10 numbers to any base up to 12 with the base determined from data.

6-3 LOOKING AT INTEGERS DIGIT BY DIGIT

In general, the more control we have over a number in the computer, the more complex the problems we might expect to be able to handle. So, for the purpose of learning to control a number in the computer digit by digit, let us write a program to take the digits of an integer and print them one at a time.

Consider the number 8394. The 8 means 8 thousand which may be written $8 \cdot 10^{**} 3$; the 3 means 3 hundred which may be written $3 \cdot 10^{**} 2$; the 9 means ninety which may be written $9 \cdot 10^{**} 1$; and the 4 means four which may be written $4 \cdot 10^{**} 0$. Looking at the numbers step by step,

$$8394 = 8 \cdot 10^{**} 3 + 394$$

$$394 = 3 \cdot 10^{**} 2 + 94$$

$$94 = 9 \cdot 10^{**} 1 + 4$$

$$4 = 4 \cdot 10^{**} 0 + 0$$

This is an example of the general relationship

$$N = I \cdot 10^{**} E + R$$

where I is the integer quotient found by

$$I = \text{INT}(N/10^{**} E)$$

and an iterative process whereby the new N is the old R and the value of E is decreased by 1 for each iteration. Solving for R we get

$$R = N - I \cdot 10^{**} E$$

All of this should begin to look familiar.

For six-digit integers the value of E will have to begin at 5 and go to 0 STEP -1. Carefully study program DIGIT and you will see that we have indeed broken integers into their separate digits. However, as always, we should look for ways to improve our programs. One change that will save a little paper

DIGIT

```

10 PRINT "INPUT ANY INTEGER";
20 INPUT N
30 IF N=0 THEN 999
40 FOR E=5 TO 0 STEP -1
50 LET I=INT(N/10^E)
60 PRINT I
70 LET R=N-I*10^E
80 LET N=R
90 NEXT E
100 PRINT
110 GOTO 10
999 END
RUN
DIGIT

```

```

INPUT ANY INTEGER?123456
1
2
3
4
5
6

```

```

INPUT ANY INTEGER?819045
8
1
9
0
4
5

```

```

INPUT ANY INTEGER?53627
0
5
3
6
2
7

```

```

INPUT ANY INTEGER?0

```

DONE

would be to print the digits across the page with semicolon spacing. We can do that by changing line 60 to read 60 PRINT I; and call for a RUN.

```

60 PRINT I;
RUN
DIGIT

INPUT ANY INTEGER?123456
1 2 3 4 5 6
INPUT ANY INTEGER?975432
9 7 5 4 3 2
INPUT ANY INTEGER?53627
0 5 3 6 2 7
INPUT ANY INTEGER?0

```

DONE

Now let us see the program with the change and try another number.
(See DIGIT1.)

```
DIGIT1

10 PRINT "INPUT ANY INTEGER";
20 INPUT N
30 IF N=0 THEN 999
40 FOR E=5 TO 0 STEP -1
50 LET I=INT(N/10^E)
60 PRINT I;
70 LET R=N-I*10^E
80 LET N=R
90 NEXT E
100 PRINT
110 GOTO 10
999 END
RUN
DIGIT1

INPUT ANY INTEGER?666666
  6      6      6      6      6      6
INPUT ANY INTEGER?0

DONE
```

One last consideration is that we might want to eliminate the leading 0's. We leave this as an exercise.

PROBLEMS FOR SEC. 6-3

- 1) Eliminate the leading 0's in DIGIT. Be careful not to eliminate all zeroes.
- 2) Test integers for divisibility by 3 by summing the digits.
- 3) Construct the integer formed by reversing the order of the digits in an INPUT integer. Print the result as an integer.
- ✓ 4) Test integers with the integer formed by reversing the order of the digits to find the greatest common factor.
- ✓ 5) Find all three-digit integers that are prime. Form new integers by reversing the digits and see if the new number is also prime. Print a number only if it and its reverse number is prime. There are 43 pairs of numbers, some of which will appear twice. You should pay particular attention to efficiency in this problem.

Strings and Files

7-1 INTRODUCTION TO STRINGS

To a BASIC programmer, a string is a set of characters. We use strings every time we print a message by enclosing it in quotes in a PRINT statement. BASIC provides the ability to save strings in a special string variable, identified by using a trailing dollar sign (\$). We may use A\$, B\$, etc., to designate string variables. Some computers allow A1\$, B8\$, etc., and some allow A\$(R,C) to designate string arrays. The use of strings enables us to process alphabetic data, such as names and addresses, and descriptive data of all kinds.

We may work with string variables in many of the ways that we do with numeric variables. For instance, in BASIC programs we may use such statements as

```
100 LET A$ = "FIRST"  
100 READ A$, B$  
100 INPUT A$, B$  
100 PRINT A$, B$
```

In order to READ A\$, B\$, we must provide a corresponding DATA statement. Some systems require all strings in DATA statements to be enclosed in quotes. Others require quotes only when the string contains a comma or 'looks like' a number. For PRINT A\$, B\$, the output will have "comma spacing." That is, the page will be arranged in 15-character columns. If we replace the comma with a semicolon, the two strings will be printed with no space between them.

We will use a short program named FIRST\$ to demonstrate LET, READ, INPUT, and PRINT.

FIRST\$

```

95  REM * FIRST STRING PROGRAM
96  REM
100 LET A$ = "THIS IS A"
110 READ B$, C$
120 PRINT A$; " "; B$; " "; C$;
130 INPUT D$
140 PRINT
150 PRINT A$; " "; B$; " "; C$; " "; D$
155 REM
160 DATA "PROGRAM T0", "DEMONSTRATE"
170 END
RUN

```

FIRST\$

THIS IS A PROGRAM T0 DEMONSTRATE?STRINGS

THIS IS A PROGRAM T0 DEMONSTRATE STRINGS

BASIC allows us to compare strings for order in accordance with a sequence known as ASCII (American Standard Code for Information Interchange). For strictly alphabetic strings, this code will alphabetize in the conventional order. ASCII places the digits 0 through 9 ahead of the letters of the alphabet. We can easily write a short program to demonstrate order comparison. See ORD\$.

ORD\$

```

95  REM * COMPARES STRINGS FOR ORDER
100 PRINT
110 PRINT "A$";
120 INPUT A$
130 IF A$ = "STOP" THEN 240
140 PRINT "B$";
150 INPUT B$
160 IF A$ < B$ THEN 220
170 IF A$ = B$ THEN 200
180 PRINT A$; " IS GREATER THAN "; B$
190 GOTO 100
195 REM
200 PRINT A$; " IS EQUAL TO "; B$
210 GOTO 100
215 REM
220 PRINT A$; " IS LESS THAN "; B$
230 GOTO 100
240 END
RUN

```

ORD\$

```

A$?WHAT'S THIS
B$?WHAT'S THAT
WHAT'S THIS IS GREATER THAN WHAT'S THAT

```

```

A$?WHAT'S THIS
B$?WHAT'S WHAT
WHAT'S THIS IS LESS THAN WHAT'S WHAT

```

```

A$?WHAT'S WHAT
B$?WHAT'S WHAT
WHAT'S WHAT IS EQUAL TO WHAT'S WHAT

```

A\$?STOP

In the handling of strings, we find that different computers have significantly different BASIC language definitions. For example, on one computer, the state-

ment 100 PRINT A\$(4) will cause the computer to output the character string stored in string variable A\$, beginning with the fourth character, whereas on another, the same statement will cause the computer to output the fourth string of the string list A\$. It is because of these differences that we present two distinctly different schemes for handling strings in the next two sections.

7-2 STRINGS—THE SUBSTRING SCHEME*

In the substring scheme, strings may be considered as a complete entity by referring to A\$, B\$, etc., or we may consider segments of A\$ by using one or two subscripts. A\$(I) specifies the segment beginning with the Ith character and continuing to the end of the string. A\$(I,J) [some computers using this scheme may require A\$(I:J)] specifies the segment from the Ith character through the Jth character inclusive, provided $I \leq J$. If $I = J$, then A\$(I,J) is a single character. This scheme does not provide for string arrays. (It has been extended on some computers, however, by using A\$(I;J,K), where the I designates which string in the single dimension array is referred to and the J,K pair designates the segment from the Jth through the Kth character.)

As with arrays, it is necessary to specify the capacity of any string variable we intend to use (for more than one character) in a DIMENSION statement. Thus, 100 DIM A\$(10),B\$(16),C(2,11) provides for up to 10 characters in A\$, up to 16 characters in B\$, and two rows and 11 columns in a numeric array C. The C dimensioning is included here merely to demonstrate that string and array dimensioning may be intermixed in a single statement. The LEN() function is provided to count the number of characters actually stored in a string. LEN(Z\$) takes on the value of the number of characters stored in string variable Z\$.

In program SEG\$1, note the dimensioning in line 100, the use of the LEN() function in lines 140 and 150, and the printing of segments in line 160.

SEG\$1

```

95 REM * DEMONSTRATES STRING SUBSCRIPTS
100 DIM A$(8)
110 READ A$
120 IF A$="STOP" THEN 210
130 PRINT "A$=";A$
140 PRINT "LEN(A$)=";LEN(A$)
150 FOR I=1 TO LEN(A$) STEP 2
160 PRINT "A$(";I;",";I+1;")=";A$(I,I+1)
170 NEXT I
180 PRINT
190 GOTO 110
195 REM
200 DATA "ABCDEF","BASIC","STOP"
210 END
RUN
SEG$1

```

```

A$=ABCDEF
LEN(A$)= 6
A$( 1 , 2 )=AB
A$( 3 , 4 )=CD
A$( 5 , 6 )=EF

```

* The programs of this section were run on a Hewlett-Packard computer.

```

A$=BASIC
LEN(A$)= 5
A$( 1 , 2 )=BA
A$( 3 , 4 )=SI
A$( 5 , 6 )=C

```

The ability to isolate a segment of a string has many uses. We may wish to pack related information into a single string such as

```
100 LET D$="JANFEBMARAPR MAYJUNJUL AUGSEP OCTNOVDEC"
```

Now we may select the desired month according to its position in D\$. Or, we might want to use a single string to contain the names of a group of individuals, last name first, but to print only the last name and first initial.

One common use of string segments is to format numbers in printed results. For instance, the appearance of the output produced by program SEG\$1 could be improved by using string output to print I and I + 1 in line 160. See lines 110 and 160 in program SEG\$2. Notice the compact appearance of the printed result there.

```
SEG$2
```

```

95 REM * PRINTING A SINGLE DIGIT NUMERIC
96 REM USING STRING OUTPUT
100 DIM A$(8),D$(9)
110 LET D$="123456789"
120 READ A$
130 IF A$="STOP" THEN 210
140 PRINT "A$=";A$
150 FOR I=1 TO LEN(A$) STEP 2
160 PRINT "A$( ";D$(I,I);", ";D$(I+1,I+1);")=";A$(I,I+1)
170 NEXT I
180 PRINT
190 GOTO 110
195 REM
200 DATA "ABCDEF","BASIC","STOP"
210 END
RUN
SEG$2

```

```

A$=ABCDEF
A$(1,2)=AB
A$(3,4)=CD
A$(5,6)=EF

```

```

A$=BASIC
A$(1,2)=BA
A$(3,4)=SI
A$(5,6)=C

```

We see in SEG\$2 the beginning of a technique for printing a numeric using string output. Obviously missing are the ability to print zero and the ability to handle more than one digit. We can take care of zero by using LET D\$ = "0123456789", but printing numbers of more than one digit requires that we use the technique of program DIGIT in Sec. 6-3. That is, we must isolate the digits of our number one at a time. Once we have the digit to be printed stored in I, we must print D\$(I + 1,I + 1) since zero is the first digit in D\$. This step

is taken in program DIGIT2. The numeric output is placed between # signs, and the string output is placed between \$ signs.

DIGIT2

```

95 REM * PRINTING A NUMERIC OF MORE
96 REM THAN ONE DIGIT USING STRING
97 REM OUTPUT
100 DIM D$(10)
110 LET D$="0123456789"
120 PRINT "INPUT ANY INTEGER";
130 INPUT N
140 IF N=0 THEN 260
150 PRINT "##";N;"##"
160 PRINT "$";
170 FOR E=5 TO 0 STEP -1
180 LET I=INT(N/10^E)
190 PRINT D$(I+1,I+1);
200 LET R=N-I*10^E
210 LET N=R
220 NEXT E
230 PRINT "$"
240 PRINT
250 GOTO 120
260 END
RUN
DIGIT2

```

```

INPUT ANY INTEGER?93617
# 93617.      #
$093617$

```

```
INPUT ANY INTEGER?0
```

It is left as an exercise to eliminate the printing of the leading zero in the output of DIGIT2.

SUMMARY

We have used strings to store nonnumeric data. Any string may be considered in its entirety, or any segment may be isolated using subscripts. A\$(I,J) designates the substring from the Ith to the Jth characters, inclusive. By placing the ten digits in a dummy string, we gain complete control over the printing of numerics by using string output.

PROBLEMS FOR SEC. 7-2

- 1) Write a program to print the characters of a string in reverse order.
- 2) Eliminate leading zeros in the output of DIGIT2. Be careful not to eliminate all zeros.
- 3) Write a program to arrange the characters of a string in order using the technique of program ARANG5 of Sec. 4-4.
- 4) Use string formatting to print the output in problem 7 of Sec. 6-2.
- 5) Write a program to convert a string integer to a numeric.
- ✓ 6) Write a program to convert a numeric input to a string output if the numeric input is allowed to contain a decimal point and be negative.

7-3 THE STRING ARRAY SCHEME*

In the string array scheme, A\$(I) names the string stored in the position numbered I of a string single-dimensioned array, and A\$(I,J) names the string stored in row I and column J of a string two-dimensional array. As with arrays used elsewhere, a DIMension statement is required if we intend to have either subscription exceed 10. The maximum number of characters which may be stored in any one array position varies from computer to computer but ranges from 6 to the thousands.

We may do many things with string arrays that we do with numeric arrays. We may READ, PRINT, INPUT, assign, and compare for order elements of the array. We may even be able to use the statement LET A\$ = "XYZ" + "ATV" to assign "XYZATV" to A\$.

DAYS01

```

100 DIM WS(7)
105
108 REM * READ DAYS OF THE WEEK
110 FOR I = 1 TO 7
120   READ WS(I)
130 NEXT I
135
138 REM * PRINT DAYS OF THE WEEK
140 FOR I = 1 TO 7
150   PRINT I; WS(I)
160 NEXT I
165
168 REM * DATA
170 DATA SUNDAY, MONDAY, TUESDAY, WEDNESDAY
180 DATA THURSDAY, FRIDAY, SATURDAY
190 END
RUN

1 SUNDAY
2 MONDAY
3 TUESDAY
4 WEDNESDAY
5 THURSDAY
6 FRIDAY
7 SATURDAY

```

Suppose we wish to work with the days of the week. We can easily read the names of the days of the week into an array. Then these names can be printed later as labels whenever needed, as shown in program DAYS01.

It is useful to be able to manipulate data in string variables. We might want to know the number of characters in one of them, for example. There are two ways to find out. One is to use the LEN function. LEN(A\$) returns the number of characters in A\$. Another is to use the CHANGE statement. CHANGE A\$ TØ A stores the number of characters in A\$ in A(O), converts each of the characters in the string A\$ to a numeric equivalent code, and then stores that numeric in a corresponding position of the one-dimensional A array. The code used for this is ASCII (American Standard Code for Information Interchange). CHANGE A TØ A\$ makes the conversion in the opposite direction. This can

* The programs of this section were run on the General Electric Information Services time sharing system.

```

CHANGE
98  REM * DEMONSTRATE CHANGE STATEMENT
100 DIM A(30),B(1)
110 PRINT "STRING";
120 INPUT A$
130 CHANGE A$ TO A
140 PRINT LEN(A$); "CHARACTERS IN "; A$; ""
150 PRINT
160 LET B(0) = 1
170 PRINT "CHAR ASCII CODE"
180 FOR I = 1 TO A(0)
190     LET B(1) = A(I)
200     CHANGE B TO B$
210     PRINT """; B$; "" "; A(I)
220 NEXT I
230 END
RUN

```

```

STRING? TRY THIS
8 CHARACTERS IN 'TRY THIS'

```

```

CHAR ASCII CODE

```

```

'T' 84
'R' 82
'Y' 89
' ' 32
'T' 84
'H' 72
'I' 73
'S' 83

```

probably best be demonstrated with a program. See especially lines 130 and 200 of program CHANGE.

Notice that it required four statements to extract the I^{th} character of A\$. In program CHANGE, we used statements 130, 160, 190, and 200 to do this. The EXT\$ function is available for just this purpose. EXT\$(A\$,I,J) extracts the group of characters beginning with I and ending with J for string A\$. Some computers use SEG\$ for this. Using EXT\$, program CHANGE becomes CHANGF.

```

CHANGF

```

```

98  REM * DEMONSTRATE CHANGE STATEMENT
100 DIM A(30)
110 PRINT "STRING";
120 INPUT A$
130 CHANGE A$ TO A
140 PRINT LEN(A$); "CHARACTERS IN "; A$; ""
150 PRINT
170 PRINT "CHAR ASCII CODE"
180 FOR I = 1 TO A(0)
210     PRINT """; EXT$(A$,I,I); "" "; A(I)
220 NEXT I
230 END
RUN

```

```

STRING? #!&+:J
6 CHARACTERS IN '#!&+:J'

```

```

CHAR ASCII CODE

```

```

'#' 35
'!' 33
'&' 38
'+' 43
':' 58
']' 93

```

We may form strings from the characters of strings in some rearranged sequence. We might print a string backwards or with the characters in alphabetic order. In order to arrange the characters of a string in alphabetic order, we can simply provide a one-dimensional array with the corresponding ASCII code numerics in increasing order. Program ORDER\$ does exactly this.

ORDERS

```

100 DIM A(100)
110 PRINT "A$";
120 INPUT AS
130 PRINT
140 CHANGE AS TO A
150 FOR I = 1 TO A(0) - 1
160     FOR J = I + 1 TO A(0)
170         IF A(I) <= A(J) THEN 210
175 REM * EXCHANGE OUT OF ORDER CODES
180         LET S = A(I)
190         LET A(I) = A(J)
200         LET A(J) = S
210     NEXT J
220 NEXT I
230 CHANGE A TO AS
240 PRINT AS
250 END
RUN

```

A\$? WHAT IF I CAN'T THINK OF SOMETHING?

'?AACEFFGHHHIIIKMNNNØØSITTTW

SUMMARY

Whenever subscripted array string variables may be used, A\$(I,J) specifies the string stored in row I, column J. We may use CHANGE A\$ TO A to convert the characters in the string variable A\$ to the equivalent ASCII code numerics in corresponding positions of the A array. We may also reverse this process by using CHANGE A TO A\$. We also find the number of characters in A\$ stored in A(0). Alternatively, we may use the LEN function. We may extract a group of characters with the EXT\$(A\$,I,J) function. This may be implemented as SEG\$.

We may assign, PRINT, INPUT, and READ string variables in much the same way that we handle these operations with numeric variables. Strings may be placed in DATA statements, and string arrays must be DIMensioned if a subscript is to exceed 10.

PROBLEMS FOR SEC. 7-3

- 1) Write a program to print the characters of a string in reverse order.
- 2) Write a program to accept string input, and tabulate the number of times each character appears.
- 3) Write a program to alphabetize the strings of a single-dimension string array.
- 4) Write a program to produce the following output, using the days of the week as stored in W\$ in program DAYS01.

```

S M T W T F S
U O U E H R A
N N E D U I T
D D S N R D U
A A D E S A R
Y Y A S D Y D
      Y D A Y
        A Y
          Y

```

- 5) Modify program ORDER\$ to eliminate duplicates.
- 6) Write a program to produce the following output, using the days of the week as stored in W\$ in program DAYS01.

```

S M T W T F S
U O U E H R A
N N E D U I T
D D S N R D U
A A D E S A R
Y Y A S D Y D
      Y D A Y
        A Y
          Y

```

7-4 INTRODUCTION TO DATA FILES

So far in our programming work all of the data used by our programs has been entered through DATA statements, INPUT statements, or LET statements. Consequently, we have had to store the data as part of the program or type the data directly at the keyboard of our terminal. This works out all right for small amounts of data that we wish to process just once. But, if we have large amounts of data or we expect to carry out several processes on our data, then we need to separate the data from the program. We can do this by using data files.

A data file is simply a storage space in the computer where we store data, much as a program may be stored in a storage space. (In fact, in some computers, files and programs are indistinguishable until we type certain commands. Obviously, we cannot RUN a data file.) By designating a separate storage space for data, we gain many capabilities. We may now store much larger amounts of data than we could possibly store in the data statements of a program. We may alter the data to accommodate the results of program calculations. We may rearrange the data according to program specifications. The possibilities are limited only by our ability to think of problems to solve.

Most computer processing done today utilizes data files. Data files are used for inventory, bookkeeping, and data processing of all kinds. Just considering the data handled by the Internal Revenue Service and the Census Bureau, the use of data files can be seen as a very complex business indeed. So we will attempt here to present only some rudiments of files processing in BASIC.

As we said earlier, a file is a storage space accessible to the computer. This space may be used to store programs and data, which may be accessed during program execution. One of the features of these files that makes them mysterious is that they are invisible. But then, so are programs during execution. However, it is now possible to carry out tremendous amounts of useful computer

work without the need for printing at the terminal, although it is good programming practice to provide some printed output to help keep track of what the computer has done. After we have seen several examples, we will gain confidence that the computer is really performing the expected operations.

The fundamental concept is that we may write or print data into a file and that we may retrieve that data under program control. Several versions of program statements are used to achieve these purposes. The next two sections explain the use of files as defined by two different systems. We have chosen Hewlett-Packard and General Electric versions of BASIC for this.

7-5 HEWLETT-PACKARD FILES

Just to get an idea about how data gets into files and how file data is accessed, let's look at two short programs. The first is a program to enter some numbers into a file. See program PRINT.

```
PRINT

90 REM * FIRST FILE DEMONSTRATION
100 FILES TEST
110 FOR I=1 TO 4
115 READ X
120 PRINT #1;X
130 NEXT I
140 DATA 3,17,11,31
150 END
RUN
PRINT
```

This is the very first program we have run which does something useful without any printed output. (As a general rule, however, it is good practice to have programs produce some meaningful printed output at the terminal.) Statements 100 and 120 introduce the first two file handling statements. Statement 100 is called the FILES statement. It is the statement which makes the file whose name is TEST available to the program. Statement 120 instructs the computer to print data into the file instead of onto the paper in the terminal. In that statement, the #1 specifies the first file named in the files statement. We may be able to name eight or more files, separated by commas. In addition, some computers allow us to replace any file originally named during program execution by using the ASSIGN statement. In the PRINT # statement, everything past the semicolon is printed into the file. We may list several data items here, and strings and numerics may be intermixed.

In order to allocate the file space in the first place, we used the OPEN command. OPEN--TEST, 15 designates a file space, called TEST, that contains 15 segments called *records* or *sectors*. Typically, a sector is large enough to store 32 numbers, or about 128 alphanumeric characters. More recent Hewlett-Packard computers allow the option of specifying record size through the CREATE command. On such a machine, CREATE TEST, 15,106 provides 15 records, each allowing up to 53 numerics, or about 212 alphanumeric characters. (106, 212, and 319 are storage efficient numbers to use in the CEATE command.)

In counting space for strings, we must add two to the number of characters

for each string and add one if there is an odd number of characters. Thus three characters require the same storage space as four.

Now let's examine a program to read the contents of our file TEST.

READ

```

90 REM * PROGRAM TO READ NUMBERS FROM A FILE
100 FILES TEST
110 READ #1;Y
120 PRINT Y;
130 GOTO 110
140 END
RUN
READ

```

```

      3      17      11      31
END-OF-FILE/END OF RECORD IN LINE 110

```

The printed output produced by program READ should convince us that those numbers really came from a computer file as they do not appear anywhere in the program itself. We also got an error message which is exactly analogous to the `OUT OF DATA IN LINE n` message we have seen before.

There are several ways to avoid terminating with this error. One is to keep track of the number of entries in the file; another is to place an item of artificial data at the end of the real data just as we did in DATA statements in programs. However, BASIC provides a special statement just for this purpose. It is the IF END statement. See line 105 of program READ01.

READ01

```

90 REM * PROGRAM READ WITH IF END 'TRAP'
100 FILES TEST
105 IF END #1 THEN 140
110 READ #1;Y
120 PRINT Y;
130 GOTO 110
140 END
RUN
READ01

```

```

      3      17      11      31

```

Statement 105 caused the computer to “remember” that if at any time we ask it to read beyond the data, it is to then execute line 140 as the next statement. In our case, that causes the program execution to terminate through the END statement.

The IF END “trap” may also be used to find the end of data in a file so that we may begin at that point to print additional data into it. Program PRINT1 does exactly this.

PRINT1

```

90 REM * PRINT WITH IF END 'TRAP'
100 FILES TEST
110 IF END #1 THEN 140
120 READ #1;X
130 GOTO 120
140 FOR I=1 TO 3

```

```

150 READ X
160 PRINT #1;X
170 PRINT X;
180 NEXT I
190 DATA 19,2,6
200 END
RUN
PRINT1

19      2      6

```

Note that PRINT1 will also print numbers into an empty file. Consequently, we can eliminate the need for program PRINT. Now we run program READ01 to verify for us that the file now contains numbers printed into it in separate runs of two programs.

```

RUN
READ01

3      17      11      31      19      2      6

```

When we used file TEST above, we simply printed numbers one after another into the file without any concern for exactly where in the file those numbers were placed. Used in this way, file TEST is called a *serial file*. However, we could have directed the computer to print each of those numbers on a different record of the file. We need the following expanded file PRINT statement for this purpose:

```
999 PRINT #1,R;X
```

This statement allows us to specify that the data following the semicolon is to be printed in the Rth record of file #1. See line 130 of program PRINT2.

```

PRINT2

90 REM * PRINT TO RECORD R IN A FILE
100 FILES TEST
110 FOR R=1 TO 4
120 READ X
130 PRINT #1,R;X
140 PRINT X;
150 NEXT R
160 DATA 3,17,11,31
170 END
RUN
PRINT2

3      17      11      31

```

Now to read the Rth value we needn't read through all R items. We may read it directly with the statement,

```
999 READ #1,R;X
```

Since this structure allows us to select at random any starting point in the file, we refer to the file as a *random access file*. See program READ02.

```

READ02

90 REM * DEMONSTRATE RANDOM ACCESS
100 FILES TEST
110 PRINT "ITEM #";
120 INPUT R
130 IF R=0 THEN 170
140 READ #1,R;X
150 PRINT X
160 GOTO 110
170 END
RUN
READ02

ITEM #? 4
31
ITEM #? 1
3
ITEM #? 0

```

One of the uses of data files is to rearrange data and store it in rearranged form. For example, let's enter the names of seven people along with their dates of birth and death in file TEST, one person to a record, and arrange them in alphabetical order using the technique of program ARANGE in Sec. 3-4.

Program ENTERA reads the data from DATA statements and prints it in the first seven records of the file.

```

ENTERA

90 REM * FILE PRINT ONE TO A RECORD
100 DIM NS$(72)
110 FILES TEST
120 FOR I=1 TO 7
130 READ NS$,A,B
140 PRINT #1,I;NS$,A,B
150 NEXT I
160 DATA "JONES, JOHN PAUL",1747,1792
170 DATA "ANTHONY, SUSAN B.",1820,1906
180 DATA "WASHINGTON, BOOKER T.",1859,1915
190 DATA "BELL, ALEXANDER GRAHAM",1847,1922
200 DATA "EDISON, THOMAS ALVA",1847,1931
210 DATA "FØRD, HENRY",1863,1947
220 DATA "BLOOMER, AMELIA JENKS",1818,1894
230 END
RUN
ENTERA

```

Program READA reads from file TEST and prints at the terminal.

```

READA

90 REM * READ NAMES FROM A FILE
100 DIM NS$(72)
110 FILES TEST
120 PRINT " DOB      NAME"
130 FOR I=1 TO 7
140 READ #1,I;NS$,A,B
150 PRINT A;NS$
160 NEXT I
170 END
RUN
READA

```

```

D08      NAME
1747     JONES, JOHN PAUL
1820     ANTHONY, SUSAN B.
1859     WASHINGTON, BOOKER T.
1847     BELL, ALEXANDER GRAHAM
1847     EDISON, THOMAS ALVA
1863     FORD, HENRY
1818     BLOOMER, AMELIA JENKS

```

Program ORDERA arranges the data in the file alphabetically. Note that line 190 is required so that when the comparison for order is made in line 160 after an exchange has taken place, A\$ stores the appropriate string. This is necessary because data is stored in two places—in the file and in the variables of the program. It is the programmer's job to keep these two storage areas coordinated.

```

ORDERA

90  REM * ALPHABETIZE NAMES IN A FILE
100 DIM A$(72),B$(72)
110 FILES TEST
120 FOR I=1 TO 6
130 READ #1,I;A$,A,A1
140 FOR J=1+1 TO 7
150 READ #1,J;B$,B,B1
160 IF A$ <= B$ THEN 200
170 PRINT #1,I;B$,B,B1
180 PRINT #1,J;A$,A,A1
190 READ #1,I;A$,A,A1
200 NEXT J
210 NEXT I
220 PRINT "FILE ALPHABETIZED"
230 END
RUN
ORDERA

```

```

FILE ALPHABETIZED

```

And once again we run READA to see that the data is properly arranged in the file.

```

RUN
READA

D08      NAME
1820     ANTHONY, SUSAN B.
1847     BELL, ALEXANDER GRAHAM
1818     BLOOMER, AMELIA JENKS
1847     EDISON, THOMAS ALVA
1863     FORD, HENRY
1747     JONES, JOHN PAUL
1859     WASHINGTON, BOOKER T.

```

SUMMARY

The FILES statement is used to make files accessible to a program. We may be able to replace the files named during execution using the ASSIGN statement. We may print data into a file using PRINT #N;A,B,C\$ to print in the next available space serially. Or we may use PRINT #N,R;A,B,C\$ to specify

that the printing be at the beginning of record R. This approach is referred to as *random access*. We have the same options in the file READ statement. READ #N;A,B,C\$ reads the next available data serially and READ #N,R;A,B,C\$ reads at record R. The IF END statement allows us to determine when we are reading past the end of data in the file or are trying to read or print past the physical boundaries of the file itself.

PROBLEMS FOR SEC. 7-5

- 1) Use the IF END “trap” to avoid reading empty records or past the physical end of the file in program READ02.
- 2) Modify ENTERA so that it will accept varying numbers of names and can be used to add names to a file without “losing” data.
- 3) Modify READA to read any number of names.
- 4) Modify ORDERA to handle any number of names.
- 5) Modify ORDERA to arrange the data in increasing order of date of birth.
- 6) Write a program to print the names in file TEST at the terminal in alphabetical order without altering the arrangement in the file itself.
- 7) Write a program to print the names from file TEST in order of increasing age at death without altering the arrangement within the file itself.
- 8) Since strings and numbers may be intermixed in a file and an attempt to read one when the other is next will result in an error condition, it is desirable to be able to distinguish between them. The TYP() function is provided for this purpose. TYP(N) takes on a value of one if the next item in the file is a numeric, two if the next item is a string, three if the next item is the end of file, and, if N is negative, four if the next item is end of record. The absolute value of N is the position of the file in the files statement. In order to get positioned at the beginning of a record without reading data, we can READ #N,R. Using the TYP() function and the positioning READ statement, write a program to read the unknown contents of a file and print them record by record at the terminal.

7-6 GENERAL ELECTRIC FILES

The files we are concerned with in this section are referred to as *external files* since they store data externally to any programs. Files are generally characterized in two ways: the *access type* and the *data storage type*.

Data in files may be accessed sequentially or at random. Sequential access is similar to the way in which DATA statements of a program are accessed. Random access is similar to the way in which the elements of an array are accessed. As long as we know the exact position of a data item in a file, we may access it directly.

The data contained in a file may be stored either as ASCII character codes or as the binary representations of ASCII character codes and the numbers being stored. We do not need to be concerned with the details of this distinction when writing BASIC programs. We need only identify the slight differences in program statement syntax required. ASCII files may be accessed only sequentially whereas binary files may be accessed either sequentially or at random.

ASCII Files

ASCII files behave in many ways just like the DATA statements of a program. The data must be read sequentially, beginning with the first data item in the file. There is no way to access data at random points. The file may be filled from the keyboard exactly as DATA statements of a program are typed, but omitting the word DATA. The file may be listed at the keyboard with the LIST command, just as programs may be listed. Lines may be corrected in a file by retyping them. Lines may be removed by typing the line number followed by a carriage return. In order to make a file available for future use, it must be SAVED, just as a program must.

Perhaps the best way to learn about files is to study an example. Let's type an ASCII file containing test score data for a class. Suppose we consider a class of only five people and enter their test scores on six tests.

File SCØRE has been typed at the keyboard and SAVED as described earlier. We list the file here:

```
LIST
SCØRE

100 MARK UNDERWØØD,65,83,92,77,68,79
110 SUSAN STALBERG,73,88,82,77,69,79
120 EDGAR ANGLEMAN,74,86,73,79,80,73
130 ALTHEA LARGE,91,92,90,99,92,90
140 GERTRUDE SMITH,71,86,87,90,83,92
```

Now, to gain some file handling experience, let's make our first program merely print the contents of the file under program control rather than use the LIST command. This approach makes it possible to print labels and arrange the data in an easy-to-read form. See program READTEST.

```
READTEST

94 REM * READ FROM A FILE AND PRINT ON THE TERMINAL
100 FILES SCØRE
110 PRINT "NAME","TEST1 TEST2 TEST3 TEST4 TEST5 TEST6"
130 READ #1, NS
150 PRINT NS; TAB(15);
160 FOR I = 1 TO 6
170 READ #1, X
190 PRINT X; " ";
200 NEXT I
210 PRINT
230 IF MORE #1 THEN 130
260 END
RUN
```

NAME	TEST1	TEST2	TEST3	TEST4	TEST5	TEST6
MARK UNDERWØØD	65	83	92	77	68	79
SUSAN STALBERG	73	88	82	77	69	79
EDGAR ANGLEMAN	74	86	73	79	80	73
ALTHEA LARGE	91	92	90	99	92	90
GERTRUDE SMITH	71	86	87	90	83	92

In program READTEST, there are just four statements of a file-handling nature. The statement 100 FILES SCØRE makes the file available to the pro-

gram. The file must exist to execute the program. The statement 130 READ #1, N\$ is like a DATA READ statement except that the "#1" appears to notify the computer to read from the first file named in the FILES statement. We may name up to eight files there by separating them with semicolons. Statement 160 is another file read statement. A statement 999 READ #N, A,B,X\$,T would read three numerics and one string from the Nth-named file in the FILES statement. The statement 230 IF MØRE #1 THEN 130 has the ability to "look ahead" in the file to "see" if there is more data in the file. If there is more data, the computer is transferred to line 130; if not, then control passes to the next line.

Now that we are able to read the file, let's perform the necessary operations to find each student average and the class average. We will require two variables to store running totals. In program AVERAGE, T2 is the running total for the class, and T1 is the student running total.

AVERAGE

```

94  REM * CALCULATE AVERAGES FROM A FILE
100 FILES SCØRE
110 PRINT "NAME","TEST1 TEST2 TEST3 TEST4 TEST5 TEST6 AVERAGE"
120 LET T1=0
130 READ #1, N$
140 LET T2 = 0
150 PRINT N$; TAB(15);
160 FOR I = 1 TO 6
170     READ #1, X
180     LET T2 = T2 + X
190     PRINT X; " ";
200 NEXT I
210 PRINT T2/6
220 LET T1 = T1 + T2
230 IF MØRE #1 THEN 130
240 PRINT
250 PRINT "CLASS AVERAGE = "T1/30
260 END
RUN

```

NAME	TEST1	TEST2	TEST3	TEST4	TEST5	TEST6	AVERAGE
MARK UNDERWOOD	65	83	92	77	68	79	77.3333
SUSAN STALBERG	73	88	82	77	69	79	78
EDGAR ANGLEMAN	74	86	78	79	80	78	79.1667
ALTHEA LARGE	91	92	90	99	92	90	92.3333
GERTRUDE SMITH	71	86	87	90	88	92	85.6667

CLASS AVERAGE = 82.5

Now that we know how to read an ASCII file under program control, let's see how to write data into such a file under program control. Suppose that we consolidate the data in file SCØRE, retaining just the names and averages to write into a new file, SCØRE1. To do this, we begin by naming both files in the FILES statement. We may enter data into an ASCII file with the WRITE #N statement. However, before writing into the file, it must be prepared for writing with the SCRATCH #N statement. SCRATCH #N sets a pointer to the beginning of the Nth-named file and prepares it for writing. In program WRITEAVG, we print each name at the terminal just to show the progress of execution during the program run. For large amounts of data, we might simply print the number of names moved. See lines 110 and 140 of program WRITEAVG.

```

WRITEAVG

94  REM * READ SCORE - WRITE SCORE1
100 FILES SCORE, SCORE1
110 SCRATCH #2
120 READ #1, NS, X1, X2, X3, X4, X5, X6
130 PRINT NS
140 WRITE #2, NS, (X1+X2+X3+X4+X5+X6)/6
150   IF MORE #1 THEN 120
160 END
RUN

MARK UNDERWOOD
SUSAN STALBERG
EDGAR ANGLEMAN
ALTHEA LARGE
GERTRUDE SMITH

```

Since this is an ASCII file, we may LIST it at the keyboard as follows:

```

SCORE1

100 MARK UNDERWOOD, 77.3333 ,
110 SUSAN STALBERG, 78 ,
120 EDGAR ANGLEMAN, 79.1667 ,
130 ALTHEA LARGE, 92.3333 ,
140 GERTRUDE SMITH, 85.6667 ,

```

Additional files statements include APPEND #N, which sets a pointer to the end of data in a file and prepares the file for the write mode in a way similar to that of the SCRATCH #N statement, and RESTORE #N, which sets a pointer to the beginning of the file and prepares it for the read mode so that we may read the data in a file more than once in a single execution of a program.

Binary Files

Binary files may be used only under program control. They may be either sequential or random access. Sequential binary files are treated for programming purposes exactly like ASCII files except that where pound signs (#) appear for an ASCII file, a colon (:) is used for a binary file.

Random Access Files

Random access files may be segmented into blocks of storage called *records*. We may dictate the size of each record and the number of records in a file when we create it, much as we dimension a two-dimensional array. The record size is measured in words of storage. The word requirements for data are as follows:

- One word per numeric
- One word per four string characters, or fraction thereof
- One word per string for internal computer control

The exact arrangement of data within a file is completely the programmer's responsibility. We must know exactly where data is to be found and what it means. The situation is no different from data handling within an array except that once data is in a file, it seems more invisible.

For our first example, let's simply write three rows of six numbers each into a binary file with one program and then select some of them for printing at the keyboard with another program. The storage requirements amount to just three records, each containing six words. We obtain such a file with the CREate command, as follows:

CRE NUMB,(RAN(6,3))

See program RND.

RND

```

94  REM * LOAD RANDOM NUMBERS INTO A BINARY FILE
100  FILES NUMB
110  FOR I = 1 TO 3
120      FOR J = 1 TO 6
130          LET X = RND(X)
140          WRITE :1, X
150          PRINT X;
160      NEXT J
170      PRINT
180  NEXT I
190  END
RUN

```

```

0.98385 0.362274 0.250535 0.338074 0.250009 0.342306
0.676737 0.820017 0.290332 0.63319 0.373523 0.853779
0.151996 0.975866 0.811924 0.448439 0.139036 0.847165

```

Notice that we are able to fill the file without regard to position in the file because we are exactly filling each record as we go. This is not always the case.

To select locations at random within the file, we need the SETW statement. SETW N TO X places a pointer in file N to the Xth word in the file without regard to file dimensions. Thus, in our file of six words per record, the ninth word is the third word on the second record. To think in terms of records and words within a record, we need a formula to determine the value of X. For the Cth word in record R where there are W words per record, the value of X is $W \cdot (R-1) + C$. Now let's write a short program to find selected positions in file NUMB. See program PICK. Notice that the RESTORE statement is not required for random access files. RESTORE:N is equivalent to SETW N TO 1.

PICK

```

94  REM * SELECT A NUMBER FROM A FILE AT RANDOM
100  FILES NUMB
110  PRINT "ROW,COL:";
120  INPUT R,K
130      IF R = 0 THEN 190
140  SETW 1 TO 6*(R-1) + K
150  READ :1, A
160  PRINT "FOUND": A
170  PRINT
180  GOTO 110
190  END
RUN

```

```

ROW,COL? 2,3
FOUND 0.290332

```

```
ROW,COL? 3,6
FOUND 0.847165
```

```
ROW,COL? 0,0
```

For our final example we will use a binary file to arrange the student data from our ASCII file SCØRE1 in order of increasing test average. We must write the necessary data into a binary file, arrange it, and then print the results. This can be done with three different programs or with a single program. We will use a single program here. See ØDERAUG.

To determine the size records required, we must know the number of characters in the name strings. We find a maximum of 14 characters. We should go to at least 16 since that is the next multiple of four. In practice, to make such a file generally useful, we would probably go even higher. Allowing for 16 characters, we need four words for storage of string data, plus one word for control, plus one word for the numeric. For this problem, a file with five records containing six words per record is sufficient. We get that with CRE SCØRE2,(RAN(6,5)).

ØDERAUG

```
100 FILES SCØRE1; SCØRE2
104 REM * WRITE DATA INTO BINARY FILE
110 FOR I = 1 TO 5
120   READ #1, NS,A1
130   SETW 2 TO 6*(I-1) + 1
140   WRITE :2, NS,A1
150 NEXT I
154 REM * NOW ARRANGE THE DATA ACCORDING TO AVERAGES
160 FOR I = 1 TO 4
170   FOR J = 1 + 1 TO 5
180     SETW 2 TO 6*(I-1) + 1
190     READ :2, NS,A1
200     SETW 2 TO 6*(J-1) + 1
210     READ :2, MS,B1
220     IF A1 <= B1 THEN 270
230     SETW 2 TO 6*(I-1) + 1
240     WRITE :2, MS,B1
250     SETW 2 TO 6*(J-1) + 1
260     WRITE :2, NS,A1
270   NEXT J
280 NEXT I
284 REM * AND NOW PRINT THE RESULTS
290 PRINT " NAME","AVERAGE"
300 PRINT
310 FOR I = 1 TO 5
320   SETW 2 TO 6*(I-1) + 1
330   READ :2, NS,A1
340   PRINT NS,A1
350 NEXT I
360 END
RUN
```

NAME	AVERAGE
MARK UNDERWOOD	77.3333
SUSAN STALBERG	73
EDGAR ANGLEMAN	79.1667
GERTRUDE SMITH	85.6667
ALTHEA LARGE	92.3333

SUMMARY

The **FILES** statement is used to make files accessible to a program. The files of this section are of two types: ASCII and BINARY. ASCII files are sequential and may be accessed from the keyboard or through a program. Binary files may be either sequential or random access and may be accessed only through a program. We may use **READ #N**, **WRITE #N**, **SCRATCH #N**, **APPEND #N** or **RESTORE #N** to handle data in an ASCII file. For sequential binary files, all of the above statement types may be used by replacing the pound signs (#) with colons (:). For random access files, we have the additional statement **SETW N TØ X** which sets a pointer at the Xth word of a file in preparation for the next **READ** or **WRITE** statement. A file is made random access in the **CREate** command.

PROBLEMS FOR SEC. 7-6

- 1) Type a few inventory items with quantity and price data into an ASCII file. Write a program to print the value of each item and the total value of inventory at the terminal.
- 2) Write a program to print a list of an unknown number of names in an ASCII file at the terminal in alphabetic order. Use **RESTORE #N** and repeated reading of the file for this purpose. Assume that there are no duplicates.
- 3) Consider a random access file containing five words per record and six records filled with numbers. Write a program to find the largest number in each record and the largest number in each "column."
- 4) You are presented with a random access file with a set of ten names in it; each name was entered first name first, followed by a space, followed by last name. Since this ordering is difficult to alphabetize, you are to replace each entry in the file rearranged so that the last name is first, followed by a comma, a space, and the first name. You know that each string is to be allocated eight words of storage.
- 5) (*Project*) Print some names into a random access file. Place a list of pointers to those names in an ASCII file so that if the pointers are read sequentially from the ASCII file and used to access the names in the random access file with the **SETW** statement, the names will be accessed in alphabetic order. Use the ASCII file to print the names in alphabetic order.

CHAPTER 8

The Quadratic Function

We define a *quadratic function* as a real function of the form

$$f(X) = AX^2 + BX + C \quad (8-1)$$

where A does not equal 0.

8-1 ZEROS

Often in mathematics we would like to find the zeros of a quadratic function. For some sets of coefficients, we may factor the expression on the right in Eq. (8-1) and set each factor equal to 0. This would be the method to use for $f(X) = X^2 + 3X + 2$. We would find zeros as follows:

$$X^2 + 3X + 2 = 0$$

Factoring,

$$(X + 1)(X + 2) = 0$$

$$\text{and } (X + 1) = 0 \quad \text{or} \quad (X + 2) = 0$$

$$\text{So } X = -1 \quad \text{or} \quad X = -2$$

and the truth set is $\{-2, -1\}$.

However, in general for nonfactorable as well as factorable quadratic expressions on the right in Eq. (8-1), we may use the quadratic formula, which may be derived by the method of completing the square. The zeros of $f(X) = AX^2 + BX + C$ are

$$X_1 = \frac{-B + \sqrt{B^2 - 4AC}}{2A}$$

$$X_2 = \frac{-B - \sqrt{B^2 - 4AC}}{2A}$$

Since we are going to insert these equations into a program we will write

```
ZZZ      LET X1 = (-B + SQR(B ** 2 - 4 * A * C)) / (2 * A)
```

and

```
ZZZ + 10 LET X2 = (-B - SQR(B ** 2 - 4 * A * C)) / (2 * A)
```

Now all we need is some data and some printing instructions (see QUAD1), which seems to work well enough. You will want to modify QUAD1 to account for nonreal zeros. You may want to just print a message or you may go ahead and compute the nonreal values. As the program stands though, if $B^2 - 4 * A * C$ is negative, the computer will at best print an error message and at worst it will terminate the RUN.

QUAD1

```
5 PRINT " A      B      C      ", "X1", "X2"
10 READ A,B,C
15 IF A=0 THEN 99
20 LET X1=(-B+SQR(B^2-4*A*C))/(2*A)
30 LET X2=(-B-SQR(B^2-4*A*C))/(2*A)
40 PRINT A;B;C;X1,X2
45 GOTO 10
50 DATA 1,3,2
60 DATA 1,2,-3,2,4,-6,6,13,6,5,-7,2
70 DATA 0,0,0
99 END
RUN
QUAD1
```

A	B	C	X1	X2
1	3	2	-1	-2
1	2	-3	1	-3
2	4	-6	1	-3
6	13	6	-.666667	-1.5
5	-7	2	1	.4

DONE

8-2 AXIS OF SYMMETRY AND TURNING POINT

The graph of a quadratic function is called a *parabola*. In examining the graph of a quadratic function we often want to know where the axis of symmetry is and where the turning point is. By completing the square on the right

$$f(X) = AX^2 + BX + C$$

$$f(X) = A \left[X^2 + \frac{B}{A} X + \frac{B^2}{4A^2} - \frac{B^2}{4A^2} \right] + C$$

$$f(X) = A \left[X^2 + \frac{B}{A} X + \frac{B^2}{4A^2} \right] - \frac{B^2}{4A} + C$$

we get

$$f(X) = A \left[X + \frac{B}{2A} \right]^2 + \frac{4AC - B^2}{4A}$$

Now, when $X = -B/2A$, $X + B/2A = 0$. The value of $f(X)$ is minimum if A is positive and maximum if A is negative, and the value of $f(-B/2A)$ is $(4AC - B^2)/4A$. Thus the coordinates of the turning point are

$$\left(-\frac{B}{2A}, \frac{4AC - B^2}{4A} \right)$$

You should know, too, that the line whose equation is $X = -B/2A$ is called the *axis of symmetry*. We should now be able to write a program to print three items of information: 1) the maximum or minimum status of the parabola, 2) the equation of the axis of symmetry, and 3) the coordinates of the turning point. Let us collect things into a flowchart (see Fig. 8-1), and write program QUAD2.

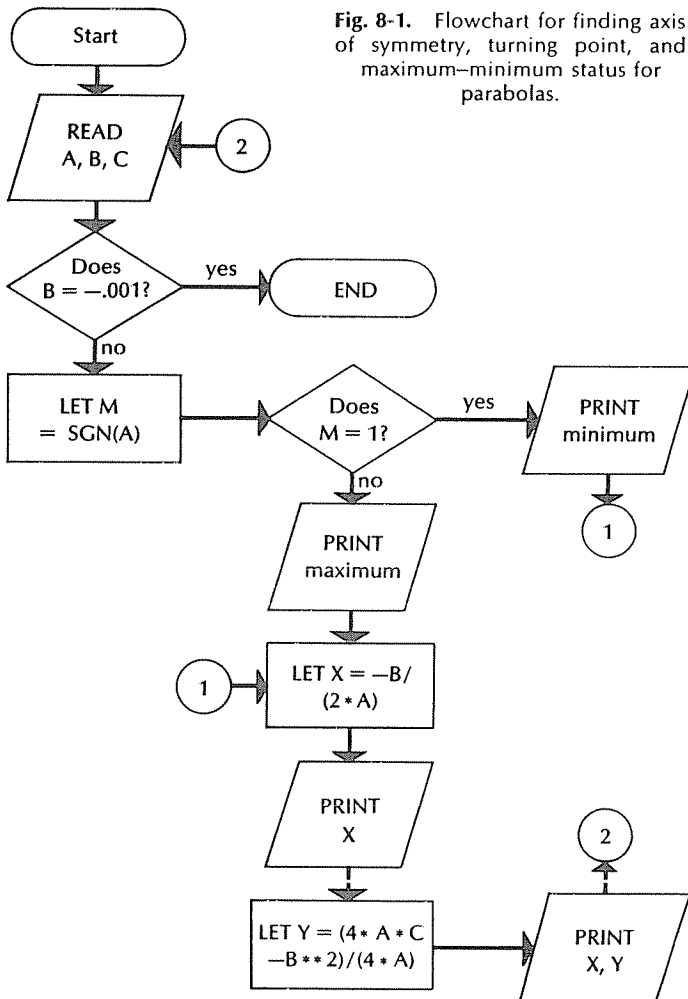


Fig. 8-1. Flowchart for finding axis of symmetry, turning point, and maximum-minimum status for parabolas.

QUAD2

```

10 READ A,B,C
15 IF B=-.001 THEN 9999
20 PRINT A;B;C
25 IF A <> 0 THEN 30
26 PRINT "A=0 THE EXPRESSION IS NOT QUADRATIC"
27 GOTO 20
28 REM DETERMINE MAX. OR MIN.
30 LET M=SGN(A)
40 IF M=1 THEN 70
50 PRINT "MAXIMUM PARABOLA"
60 GOTO 80
70 PRINT "MINIMUM PARABOLA"
73 REM FIND THE AXIS OF SYMMETRY
80 LET X=-B/(2*A)
90 PRINT "AXIS OF SYMMETRY IS X =";X
98 REM FIND THE EXTREME VALUE
100 LET Y=(4*A*C-B*2)/(4*A)
110 PRINT "THE TURNING POINT IS (";X;",";Y;")"
115 PRINT
120 GOTO 10
150 DATA 1,3,2,1,2,-3,6,13,6
155 DATA -3,5,11
160 DATA 4,-.001,1
9999 END
RUN
QUAD2

```

```

      1      3      2
MINIMUM PARABOLA
AXIS OF SYMMETRY IS X =-1.5
THE TURNING POINT IS (-1.5      ,-.25      )

```

```

      1      2      -3
MINIMUM PARABOLA
AXIS OF SYMMETRY IS X =-1
THE TURNING POINT IS (-1      , -4      )

```

```

      6      13      6
MINIMUM PARABOLA
AXIS OF SYMMETRY IS X =-1.08333
THE TURNING POINT IS (-1.08333      , -1.04167      )

```

```

     -3      5      11
MAXIMUM PARABOLA
AXIS OF SYMMETRY IS X = .833333
THE TURNING POINT IS ( .833333      , 13.0833      )

```

DONE

8-3 PLOTTING THE PARABOLA

One last consideration for the parabola is to plot its graph. This works well right on the terminal itself. We may use the spaces across the carriage as one axis and the paper lengthwise as the other axis. Since the line feed is automatically set on the terminal, the X-axis should run perpendicular to the carriage and the Y-axis should run across the page. This means that one line represents one unit on the X-axis and one space represents one unit on the Y-axis. This is rotated 90 degrees clockwise from the conventional system.

Let us start out with the simplest possible graph and see what refinements

will be required. We will first graph $Y = X ** 2$. We will put " "; in a loop to get the printing head to the point that we want plotted. Any printed character may be used to represent the plotted points. The range you select will depend on the width of the carriage on your terminal. Selecting the domain for X as -7 to $+7$ we will require a range of 0 to 49.

When $X = -7$, we want the printing head to step out 48 spaces, then print a character, and then RETURN. Now we want X to go to -6 and the printing head will have to step out only 35 spaces, print a character, and RETURN. As this process is repeated, it too will be put in a loop with X going from -7 to $+7$ incrementing by 1. It will be convenient to define a function here, not as a saving now, but to fit in with later plotting problems. Before writing the program PLØT1, let us draw a flowchart (see Fig. 8-2). Notice that we intend printing the spaces followed by a semicolon and the plotted points also followed by a semicolon. After the point has been plotted, we do not want the printing head to step the rest of the way across the carriage as that would be a waste of computer time for this particular plot. So line 62 is used to return the printing head to the left margin. We should observe that the procedure we are developing is not especially efficient in the first place, and so should be used sparingly.

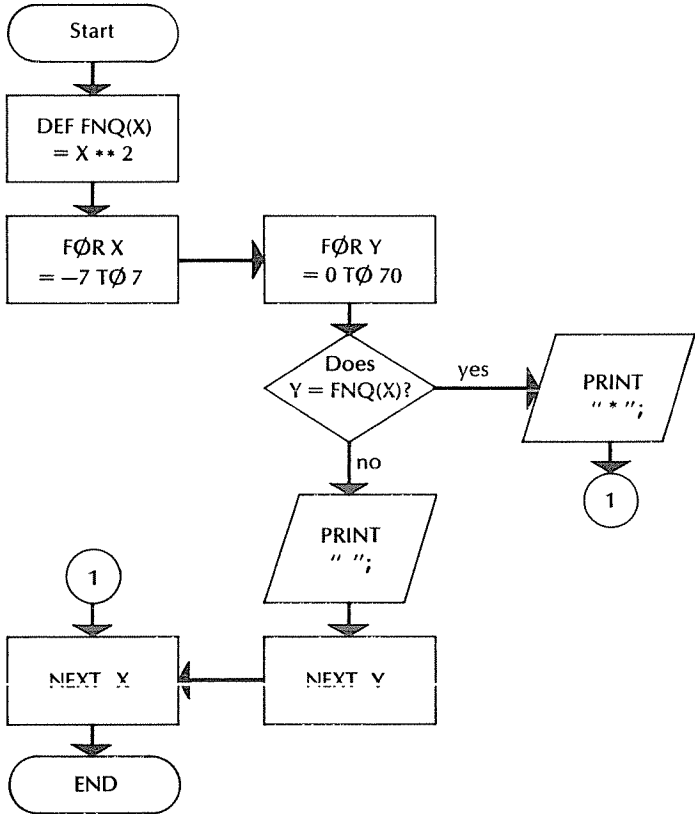



Fig. 8-2. Flowchart to plot $Y = X ** 2$.

PLØT1

```

30 DEF FNQ(X)=X^2
60 FOR X=-7 TO 7
62 PRINT
88 REM LINE 90 HAS THE EFFECT OF NUMBERING THE SPACES
89 REM ACROSS THE PAGE 0 TO 70
90 FOR Y=0 TO 70
120 IF Y=FNQ(X) THEN 210
148 REM IF Y DOES NOT EQUAL FNQ(X) THEN PRINT A BLANK SPACE
150 PRINT " ";
180 NEXT Y
210 PRINT "*";
212 REM PLØT THE POINT AND GO TO NEXT X
240 NEXT X
270 END
RUN
PLØT1

```

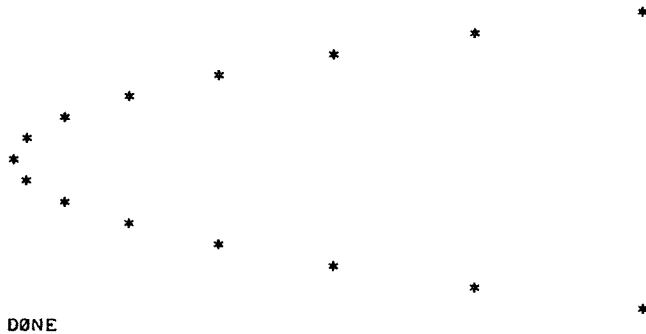

DØNE


PLØT1 was not bad for our first try. If we are going to plot other parabolas, we will have to make a provision for values of Y less than 0. So we may change line 90 to read $90 \text{ FOR } Y = -M \text{ TO } 70 - M$, where M is the number of spaces to the left of 0, and then we can put M on INPUT:

```

90 FOR Y= -M TO 70-M
5 INPUT M
4 PRINT "INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO";
88
89
6 PRINT
RUN
PLØT2

```

INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO?10

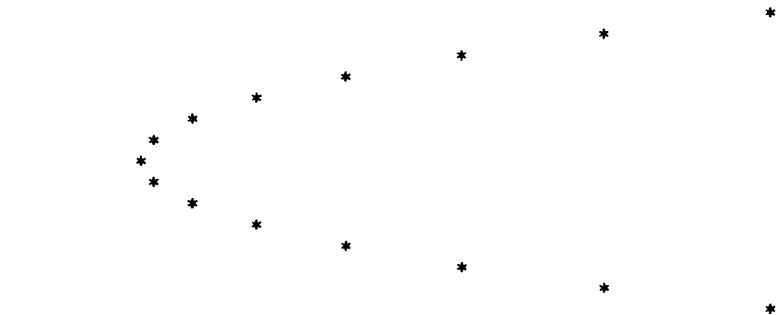

DØNE

We have indeed graphed $Y = X ** 2$; however, the graph is not clearly defined because there are no axes to specify the coordinate system. Let us build up the coordinate system by first putting in the origin by plotting a 0 there. Immediately, we are faced with a decision. If the graph contains the origin, do we want the plotted point or the origin designation? Since the absence of the plotted point for $X = 0$ would indicate that it should have been plotted at the origin, let us plot the 0 at the origin as first priority. So, before anything gets done for a particular value of X , we ask if the value of Y is 0. If it is, we next look for the point at which X is also 0. At $(0, 0)$ we print 0. Having printed 0, we next look to see if $FNQ(X)$ is greater than 0. If it is, we send the printing head on across the page.


```

92 IF Y <> 0 THEN 120
94 IF X <> 0 THEN 120
95 REM IF THE COMPUTER GETS THROUGH HERE THE
96 REM PRINTING HEAD IS AT THE ORIGIN
98 PRINT "0";
100 IF FNQ(X)>0 THEN 180
102 REM IF FNQ(X) > 0 GO FIND WHERE IT IS
103 REM OTHERWISE GET THE NEXT VALUE OF X
106 GOTO 240

RUN
PLOT3

INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO?6

```

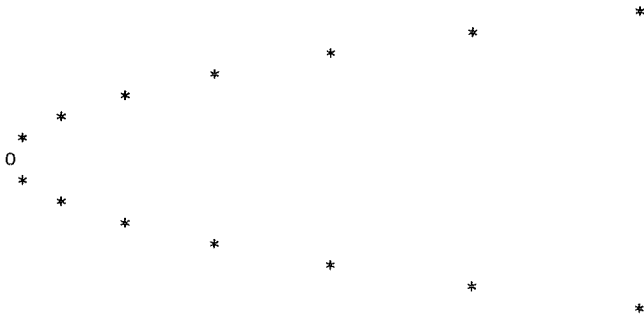

DONE


As long as we have the X-axis located, we might just as well put it in the graph. All that is necessary is to have a PRINT instruction whenever $Y = 0$ but X does not.

```

94 IF X=0 THEN 98
95 PRINT "+";
96 GOTO 100
RUN
PLOT4

```

INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO?9

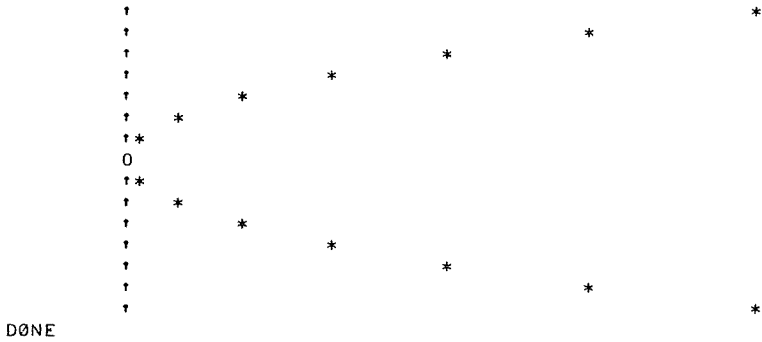


Finally, we may put in a Y-axis. Let us settle for having the Y-axis along the leading side of the graph. By putting the Y-axis there, we will be able to print the scale without interfering with the graph itself. For the particular graph we have been plotting a range from 0 to 50 is reasonable.

```

8 PRINT " ";
10 FOR X=0 TO 50 STEP 10
12 PRINT " ";X;
14 NEXT X
15 PRINT
16 FOR X=1 TO 70
18 IF X/10=INT(X/10) THEN 24
20 PRINT "-";
22 GOTO 26
24 PRINT ":",";
26 NEXT X
RUN
PLOT5

```

INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO?9

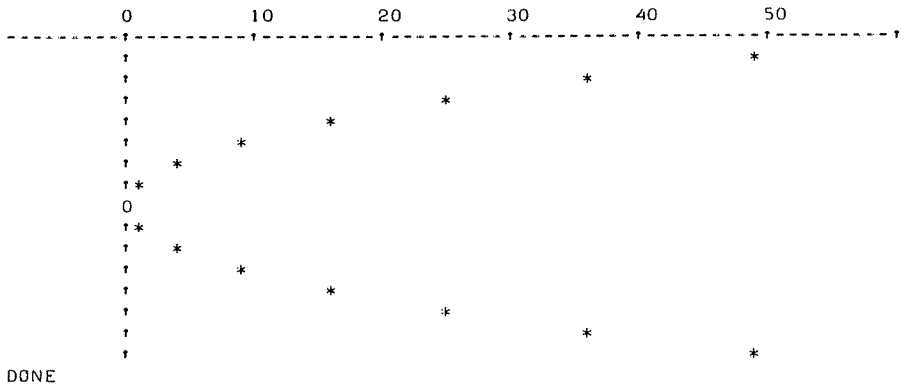

At this point, the program is scattered all over the place and some of the line numbers are very close together. So we renumber beginning with line 10 and print the entire program in PLØT5.

PLØT5

```

10 PRINT "INPUT THE NUMBER ØF SPACES DESIRED TO THE LEFT ØF
    ZERO";
20 INPUT M
30 PRINT
40 PRINT "    ";
50 FOR X=0 TO 50 STEP 10
60 PRINT "    ";X;
70 NEXT X
80 PRINT
90 FOR X=1 TO 70
100 IF X/10=INT(X/10) THEN 130
110 PRINT "-";
120 GØTØ 140
130 PRINT "+";
140 NEXT X
150 DEF FNQ(X)=X+2
160 FOR X=-7 TO 7
170 PRINT
180 FOR Y=-M TO 70-M
190 IF Y <> 0 THEN 280
200 IF X=0 THEN 230
210 PRINT "+";
220 GØTØ 240
230 PRINT "0";
240 IF FNQ(X)>0 THEN 310
250 REM IF FNQ(X) > 0 GØ FIND WHERE IT IS
260 REM ØTHERWISE GET THE NEXT VALUE ØF X
270 GØTØ 340
280 IF Y=FNQ(X) THEN 320
290 REM IF Y DOES NØT EQUAL FNQ(X) THEN PRINT A BLANK SPACE
300 PRINT " ";
310 NEXT Y
320 PRINT "*";
330 REM PLØT THE PØINT AND GØ TO NEXT X
340 NEXT X
350 END

```


There are still several considerations regarding this program for plotting. For instance, as the program is written, it will not plot the X-axis if the Y value is less than 0. The scale is fixed. There is provision for only one function to be plotted. Also, consider what happens if the value of Y is not an integer. All of these comments suggest areas in which the program could be improved. Let us insert a different function and call for one last RUN of PLØT5.

```

150 DEF FNQ(X)=(X-2)*2+3
160 FOR X=-5 TO 8
RUN
PLØT5

```

INPUT THE NUMBER OF SPACES DESIRED TO THE LEFT OF ZERO???

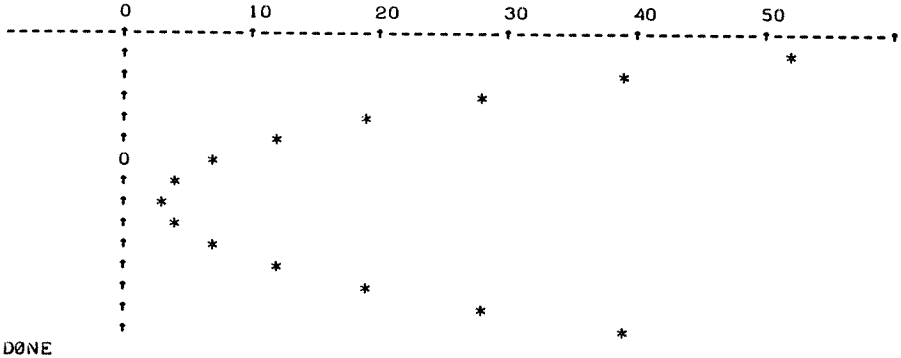

SUMMARY FOR CHAP. 8

There are several things that can be done with the quadratic function on a computer: 1) we can calculate the zeros; 2) we can find the various constants that specify the appearance of the graph; 3) and we can even use the terminal itself to plot a graph of the function. Of course the graphing program may be used to plot other functions as well.

PROBLEMS FOR CHAP. 8

- 1) Write a program that finds the results of QUAD1, but prints rational zeros as fractions reduced to lowest terms.
- 2) Modify QUAD1 to compute nonreal zeros.
- 3) The Y-coordinate of the turning point of a parabola may also be found by evaluating $f(-B/(2 \cdot A))$. Rewrite QUAD2 by defining a function.
- 4) For sets of coefficients in data lines, have the computer print coordinate pairs (X, Y) for a reasonable range.
- 5) Modify PLØT5 to permit the X-axis to be printed for Y-coordinates less than 0. Also provide for the point to be plotted where the graph crosses the X-axis.

CHAPTER 9

Trigonometry

9-1 INTRODUCTION TO SIN(X), COS(X), AND TAN(X)

We choose to define the circular functions in terms of a point (X, Y) plotted in a rectangular coordinate system. Consider the point (X, Y). It is at a distance R from the origin. We may find R from X and Y by using the *Pythagorean theorem*:

$$R = \sqrt{X^2 + Y^2}$$

It is conventional to use Greek letters for angles. However, since computer terminals do not provide them, we may use any letters we wish. Let us use G to measure the angle whose initial side is the non-negative portion of the X-axis and whose terminal side is the ray that has its endpoint at the origin and contains the point (X, Y). See Fig. 9-1.

From Fig. 9-1 we define three circular functions as follows:

$$\cos G = X/R$$

$$\sin G = Y/R$$

$$\tan G = Y/X$$

where cos stands for cosine, sin stands for sine, and tan stands for tangent.

In BASIC it is required that the angles be measured in radians. 1 radian may be defined as the central angle subtended by an arc length of R on the circumference of a circle of radius R. Since the circumference of a circle of radius R is $2\pi R$, we see that

$$2\pi \text{ radians} = 360 \text{ degrees}$$

$$\pi \text{ radians} = 180 \text{ degrees}$$

$$1 \text{ radian} = 180/\pi \text{ degrees}$$

$$\pi/180 \text{ radians} = 1 \text{ degree}$$

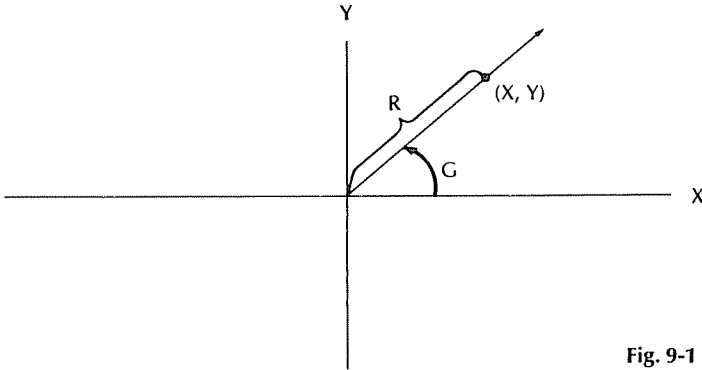


Fig. 9-1

Although some time-share systems provide the special computer functions $\text{RAD}(X)$ and $\text{DEG}(X)$ to convert from degrees to radians and from radians to degrees, respectively, you should be prepared to make the required conversions.

The usually available computer trigonometric functions are $\text{SIN}(X)$, $\text{COS}(X)$, and $\text{TAN}(X)$. They are used in much the same way that all other computer functions are used. Just be sure that the argument of the function is in radians.

In mathematics, it is customary to define three additional circular functions as follows:

$$\begin{array}{lll} \sec G = R/X & \text{or} & \sec G = 1/\cos G \\ \csc G = R/Y & \text{or} & \csc G = 1/\sin G \\ \cot G = X/Y & \text{or} & \cot G = 1/\tan G \end{array}$$

where $\sec$ stands for secant, $\csc$ stands for cosecant, and $\cot$ stands for cotangent. Some computers provide these three functions in addition to the earlier three, but we may always use the appropriate reciprocal. As always, should an expression become too cumbersome, we have the option of defining a program function using DEF .

Let us get the computer to print a small table of values of $\sin$, $\cos$, and $\tan$ for 0 to 80 degrees in intervals of 10 degrees. We stop short of 90 degrees to avoid having an undefined value for the tangent of 90 degrees. To write program TRIG1 , we will have to convert degrees to radians, so we multiply by $\pi/180$.

9-2 RIGHT TRIANGLES AND ARCTANGENT

Taking the graph of Fig. 9-1 and dropping the perpendicular from (X, Y) in the first quadrant to the X -axis we get Fig. 9-2. We have formed a right triangle in which the length of the hypotenuse is R , the length of the base is X , and the length of the altitude is Y . Redrawing the triangle without the coordinate system, we get triangle ABC with the trigonometric ratios as in Fig. 9-3.

```
TRIG1
5 PRINT "SINE","COSINE","TANGENT","RADIANs","DEGREES"
9 REM WE COMPUTE A CONVERSION CONSTANT
10 LET C=3.14159/180
20 FOR G=0 TO 80 STEP 10
30 PRINT SIN(G*C),COS(G*C),TAN(G*C),G*C,G
40 NEXT G
50 END
RUN
TRIG1
```

SINE	COSINE	TANGENT	RADIANS	DEGREES
0	1.	0	0	0
.173648	.984808	.176327	.174533	10
.34202	.939692	.36397	.349066	20
.5	.866025	.57735	.523599	30
.642788	.766044	.8391	.698132	40
.766044	.642788	1.19175	.872665	50
.866025	.5	1.73205	1.0472	60
.939692	.34202	2.74748	1.22173	70
.984808	.173648	5.67129	1.39626	80

DONE


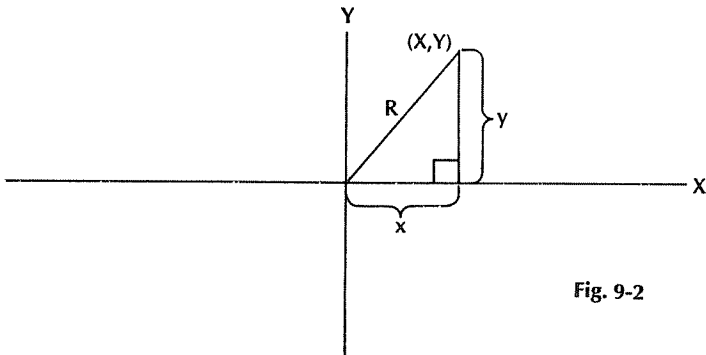


Fig. 9-2



$\cos \angle A = b/c$
 $\sin \angle A = a/c$
 $\tan \angle A = a/b$

Fig. 9-3

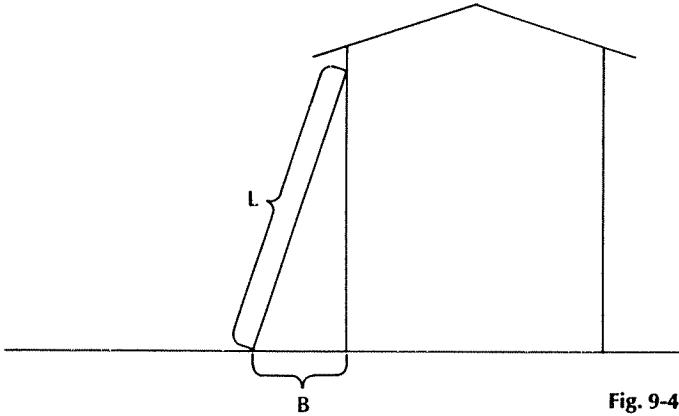


Fig. 9-4

We also know from geometry that $\angle A$ and $\angle B$ are complements, i.e., their sum is 90 degrees or $\pi/2$ radians.

Let us solve a problem: George has a 36-ft ladder which he is going to use to paint his father's house. He believes that the angle formed by the ladder and the side of the house should be not less than 14 degrees and not more than 15 degrees. He needs to know how far out from the house to place the foot of the ladder. See Fig. 9-4.

We may use either $\text{SIN}(G) = B/L$ or $\text{COS}(90 - G) = B/L$. Let us choose the sin function and solve for B:

$$B = L \cdot \text{SIN}(G)$$

We will have to convert degrees to radians. This is the purpose of line 10 in program LADER.

```
LADER
10 LET C=3.14159/180
20 LET L=36
30 PRINT "36' LADDER BASE MUST BE OUT FROM THE HOUSE IN FEET"
40 PRINT "NOT LESS THAN", "NOT MORE THAN"
50 PRINT L*SIN(C*14), L*SIN(C*15)
60 END
RUN
LADER

36' LADDER BASE MUST BE OUT FROM THE HOUSE IN FEET
NOT LESS THAN  NOT MORE THAN
 8.70918       9.31748

DONE
```

We really do not need more than hundredths, so let us round off. Also, since George may want to change the length of the ladder to reach different heights, let the ladder length go from 36 ft to 20 ft. See LADER1.

LADER1

```

10 LET C=3.14159/180
30 PRINT "LADDER BASE MUST BE OUT FROM THE HOUSE IN FEET"
40 PRINT "NOT LESS THAN","NOT MORE THAN","LADDER LENGTH"
45 FOR L=36 TO 20 STEP -2
50 PRINT INT(L*SIN(C*14)*100+.5)/100,INT(L*SIN(C*15)*100+.5)/100,
51 PRINT L
55 NEXT L
60 END
RUN
LADER1

```

LADDER BASE MUST BE OUT FROM THE HOUSE IN FEET		
NOT LESS THAN	NOT MORE THAN	LADDER LENGTH
8.71	9.32	36
8.23	8.8	34
7.74	8.28	32
7.26	7.76	30
6.77	7.25	28
6.29	6.73	26
5.81	6.21	24
5.32	5.69	22
4.84	5.18	20

DONE

ATN(X)


Suppose we know the lengths of the sides of a right triangle and we need to know the angles. If we are using printed tables in a book, we may look up the angle whose sin, cos, or tan is known. Not so with the computer. An additional computer function is required for this. ATN(X) is the function usually available, though some systems will provide others as well. ATN(X) computes the angle whose tangent is X. If

$$\text{TAN}(G) = X$$

then

$$\text{ATN}(X) = G$$

where ATN stands for arctangent and G is in radians.

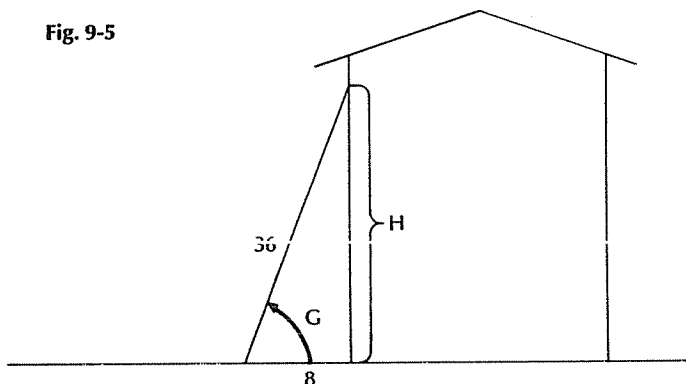Fig. 9-5

Suppose we lean a 36-ft ladder against a building with the base 8 ft out and we would like to know the angle formed by the ground and the ladder, as in Fig. 9-5. We can say

$$\text{TAN}(G) = H/8$$

which means

$$\text{ATN}(H/8) = G$$

$$H = \text{SQR}(36^2 - 8^2)$$

Therefore, G may be found in radians by

$$G = \text{ATN}(\text{SQR}(36^2 - 8^2)/8)$$

and the angle in degrees may be found by

$$\text{LET } G = G * 180/\pi$$

See LADER2.

```
LADER2
10 LET G=ATN(SQR(36^2-8^2)/8)
15 PRINT G;"RADIANS"
20 LET G=G*180/3.14159
30 PRINT G;"DEGREES"
40 END
RUN
LADER2

1.3467      RADIANS
77.1605     DEGREES

DONE
```

SUMMARY

We now may apply the computer to the trigonometry of the right triangle using $\text{SIN}(X)$, $\text{COS}(X)$, and $\text{TAN}(X)$ to find sides when angles are known and using $\text{ATN}(X)$ when we wish to compute angles. We must always be aware of the need to use radians for the argument of the computer trigonometric functions.

PROBLEMS FOR SEC. 9-2

- 1) Modify LADER2 to give the angle in degrees and minutes.
- 2) Modify LADER2 to give the angle in degrees, minutes, and seconds.
- 3) Rewrite LADER2 so that the number of radians is given in terms of π .
- 4) If the sides of a triangle are 10, 10, and 4, find the angles of the triangle to the nearest minute.
- 5) Find the angles of a 3, 4, 5 right triangle to the nearest minute.
- 6) Find the angles of a 5, 12, 13 right triangle to the nearest minute.

7) A right triangle has one angle $42^{\circ}25'$ and the side opposite that angle has a length of 10.0". Find the other sides of the triangle.

8) Standing 1000 ft from the base of a lighthouse on level ground, the angle of elevation is $7^{\circ}30'$. Find the height of the lighthouse.

9-3 LAW OF SINES AND LAW OF COSINES

Law of Sines

By drawing a triangle successively with each of its vertices at the origin of a rectangular coordinate system, we may compute its area in three ways. Referring to Fig. 9-6, the area is found by

$$\text{Area} = \frac{1}{2}b(H1) \quad \text{or} \quad \frac{1}{2}a(H2) \quad \text{or} \quad \frac{1}{2}c(H3) \quad (9-1)$$

We should see that

$$\sin C1 = H1/a$$

$$\sin B1 = H2/c$$

$$\sin A1 = H3/b$$

Solving for the heights we get

$$H1 = a \sin C1$$

$$H2 = c \sin B1$$

$$H3 = b \sin A1$$

Substituting in Eq. (9-1) we get

$$\text{Area} = \frac{1}{2}b(a \sin C1) \quad \text{or} \quad \frac{1}{2}a(c \sin B1) \quad \text{or} \quad \frac{1}{2}c(b \sin A1) \quad (9-2)$$

Therefore we may find the area of any triangle by taking one half the product of two sides and the sine of the included angle.

Since the area of a triangle is unique, we may set the three expressions for area in Eq. (9-2) equal to get

$$\frac{1}{2}ba \sin C1 = \frac{1}{2}ac \sin B1 = \frac{1}{2}cb \sin A1$$

By clearing of fractions and dividing through by abc , we get

$$\frac{\sin C1}{c} = \frac{\sin B1}{b} = \frac{\sin A1}{a} \quad (9-3)$$

Equation (9-3) is called the *Law of Sines*. It enables us to find all parts of a triangle if we are given any two sides and the angle opposite one of them, or if we are given any two angles and any one side (provided, of course, the triangle exists).

Let us write a program to find the remaining parts of a triangle ABC given $A1$, $B1$, and a . Since the sum of the measures of the angles of a triangle is 180° degrees, we first get

$$C1 = 180^{\circ} - (A1 + B1) \quad (9-4)$$

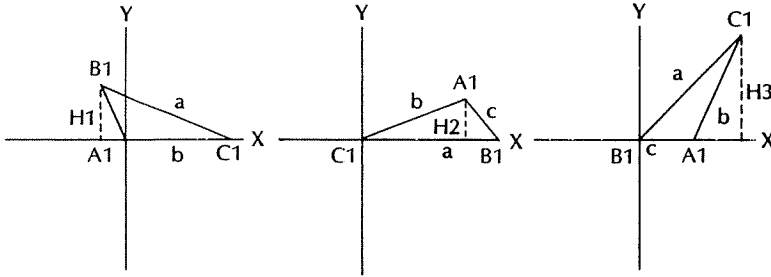


Fig. 9-6

The Law of Sines gives us

$$\frac{\sin A1}{a} = \frac{\sin B1}{b}$$

Solving for b gives

$$b = \frac{a \sin B1}{\sin A1} \quad (9-5)$$

Similarly we get

$$c = \frac{b \sin C1}{\sin B1} \quad (9-6)$$

And finally, the area may be found by

$$\text{Area} = \frac{1}{2}ab \sin C1 \quad (9-7)$$

All we have to do is put all that into a program. We may do that almost directly from Eqs. (9-4)–(9-7). These four equations appear in order in lines 60, 70, 80, and 90 of program LAWSIN.

In writing the program, we have done only slightly more work than we would do preparing to do the calculation by hand. However, we are letting the computer take the drudgery out of the actual calculation. We also have the program available to do large numbers of calculations at a later date with virtually no additional effort required. However, we continue to be totally responsible for the mathematics required.

If we reflect for a moment upon the congruence of triangles, the various congruence conditions come to mind. They are side-angle-side, angle-side-angle, side-side-side, and angle-angle-corresponding side. There are special cases for right triangles. We should see then, that if any of these four sets of measures is known, we should be able to find the remaining three parts uniquely. And so we can. We have just used LAWSIN for two angles and a nonincluded side. We should be able to handle two angles and the included side with only slight modifications of LAWSIN. However, you should see that we cannot handle side-side-side or side-angle-side with the Law of Sines. For these we need the *Law of Cosines*.

140 Basic BASIC

LAW SIN

```

8 REM WE COMPUTE THE CONVERSION FACTOR
10 LET K=3.14159/180
18 REM DEFINE TRIG FUNCTION FOR DEGREES
20 DEF FNT(G)=SIN(G*K)
28 REM DEFINE A ROUNDING FUNCTION
30 DEF FNR(X)=INT(X*100+.5)/100
38 REM ' A1 AND B1 ARE ANGLES AND A IS A SIDE
40 READ A1,B1,A
50 IF A1=0 THEN 999
58 REM FIND THE THIRD ANGLE
60 LET C1=180-(A1+B1)
68 REM 70 AND 80 COMPUTE THE OTHER TWO SIDES
70 LET B=A*FNT(B1)/FNT(A1)
80 LET C=B*FNT(C1)/FNT(B1)
88 REM COMPUTE AREA
90 LET A2=.5*A*B*FNT(C1)
98 REM NOW PRINT THE RESULTS
100 PRINT " ", " A", " B", " C"
110 PRINT "THE ANGLES ARE", A1, B1, C1
120 PRINT "THE SIDES ARE", FNR(A), FNR(B), FNR(C)
130 PRINT "AND THE AREA IS "; FNR(A2)
140 PRINT
150 GOTO 40
500 DATA 24, 51, 10
510 DATA 30, 60, 15
520 DATA 45, 45, 20
530 DATA 0, 0, 0
999 END
RUN
LAW SIN

```

	A	B	C
THE ANGLES ARE	24	51	105
THE SIDES ARE	10	19.11	23.75
AND THE AREA IS	92.28		

	A	B	C
THE ANGLES ARE	30	60	90
THE SIDES ARE	15	25.98	30
AND THE AREA IS	194.86		

	A	B	C
THE ANGLES ARE	45	45	90
THE SIDES ARE	20	20	28.28
AND THE AREA IS	200		

DONE

Law of Cosines

For any triangle A1B1C1 we may place a vertex at the origin of a rectangular coordinate system and designate the vertices as shown in Fig. 9-7.

Using the Pythagorean theorem, we may compute a^2 by

$$a^2 = (c \cos A1 - b)^2 + (c \sin A1)^2$$

Simplifying the right side we get

$$a^2 = c^2 \cos^2 A1 - 2bc \cos A1 + b^2 + c^2 \sin^2 A1$$

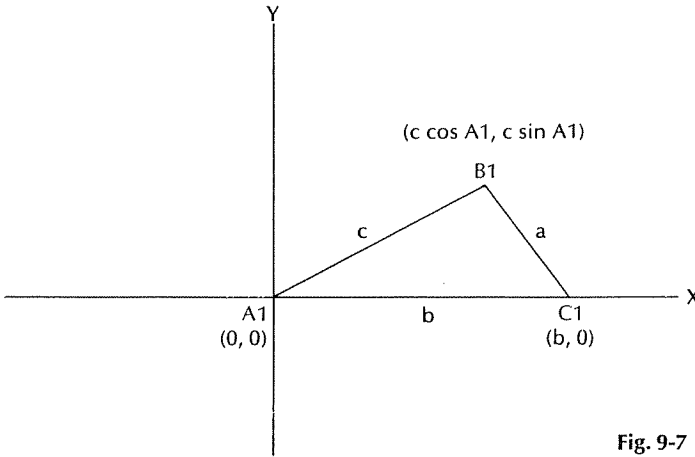


Fig. 9-7

Rearranging terms

$$a^2 = b^2 + c^2(\cos^2 A1 + \sin^2 A1) - 2bc \cos A1$$

Since $\cos^2 A1 + \sin^2 A1 = 1$, we finally get

$$a^2 = b^2 + c^2 - 2bc \cos A1 \quad (9-8)$$

Equation (9-8) is the statement of the Law of Cosines solved for vertex A1 at the origin. Placing B1 at the origin we would get

$$b^2 = a^2 + c^2 - 2ac \cos B1 \quad (9-9)$$

and placing C1 at the origin would produce

$$c^2 = a^2 + b^2 - 2ab \cos C1 \quad (9-10)$$

In the form of Eqs. (9-8)–(9-10) the Law of Cosines is appropriate for handling problems in which two sides and the included angle are given. Once you obtain the third side by taking the square root of the right side of the equation, you may use the Law of Sines to obtain a second angle, or you may proceed as for the side-side-side congruence.

If we solve Eq. (9-8) for $\cos A1$, we get

$$\cos A1 = \frac{b^2 + c^2 - a^2}{2bc} \quad (9-11)$$

So, if we are faced with a side-side-side congruence, we may easily find the value of $\cos A1$. Now our only problem is to get the value of A1 from the value of $\cos A1$. This will require the $\text{ATN}(X)$ function. We should know that

$$\tan A1 = \frac{\sin A1}{\cos A1}$$

and for A1 between 0 and 180 degrees, $\sin A1$ is always positive. Thus,

$$\sin A1 = \sqrt{1 - \cos^2 A1} \quad (9-12)$$

Thus

$$\tan A1 = \frac{\sqrt{1 - \cos^2 A1}}{\cos A1}$$

And so,

$$A1 = \text{ATN} \left(\frac{\sqrt{1 - \cos^2 A1}}{\cos A1} \right) \quad (9-13)$$

Now, we will be able to translate Eqs. (9-11)–(9-13) into BASIC program statements. From Eq. (9-11) we get

$$\text{LET } T = (B ** 2 + C ** 2 - A ** 2) / (2 * B * C)$$

and from Eq. (9-12) we get

$$\text{LET } T1 = \text{SQR}(1 - T ** 2)$$

and finally from Eq. (9-13),

$$\text{LET } A1 = \text{ATN}(T1/T)$$

These three statements constitute the heart of our program LAWCOØS which reads three sides from data and prints all six parts of the triangle. See especially lines 50, 60, and 70.

We could have done the work of lines 90 through 120 by shuffling the data around and using lines 50 through 80 as a subroutine.

SUMMARY

This section has been devoted to solving triangles which may be uniquely determined. We have developed the Law of Sines into a program to solve the case of two angles and a nonincluded side and indicated that, with a few changes, the angle-side-angle case is solvable by the Law of Sines also.

The Law of Cosines has been used to find the angles of a triangle whose sides are known. It has been indicated that the case of side-angle-side is appropriate for the Law of Cosines also. This covers the uniquely determined cases except hypotenuse-leg. There remains the ambiguous case. If two sides and a nonincluded angle are given, there may be two, one, or no triangles possible. If solvable, such triangles are solvable by the Law of Sines. This is left to the student in the exercises.

PROBLEMS FOR SEC. 9-3

- 1) Write a program to solve the angle-side-angle case.
- 2) Write a program to handle given two angles and a nonincluded side, and two angles and the included side. Use an item of data to determine which kind of data is provided.
- 3) Modify LAWCOØS to use lines 50, 60, 70, and 80 as a subroutine and shuffle the data as discussed in text.
- 4) Write a program to solve the side-angle-side case.
- 5) Write a program to handle given three sides, and two sides and the included angle. Use an item of data to designate which set of data is provided.

LAWCØS

```

10 DEF FNR(X)=INT(X*100+.5)/100
15 PRINT " ", " A", " B", " C"
20 READ A,B,C
30 IF A=0 THEN 999
40 PRINT "THE SIDES ARE",A,B,C
48 REM T IS REALLY CØS(A1)
50 LET T=(B*2+C*2-A*2)/(2*B*C)
58 REM T1 IS REALLY SIN(A1)
60 LET T1=SQR(1-T*2)
68 REM A1 IS THE ANGLE INCLUDED BY SIDES B AND C
70 LET A1=ATN(T1/T)
78 REM CONVERT RADIANS TO DEGREES
80 LET A1=A1*180/3.14159
88 REM WE NOW REPEAT THE PRØCESS TO FIND ANGLE B1
90 LET T=(A*2+C*2-B*2)/(2*A*C)
100 LET T1=SQR(1-T*2)
110 LET B1=ATN(T1/T)
120 LET B1=B1*180/3.14159
130 PRINT "THE ANGLES ARE",FNR(A1),FNR(B1),180-(FNR(A1)+FNR(B1))
140 PRINT
150 GØTØ 20
500 DATA 3,4,5,300,400,500
510 DATA 1.73205,1,2
520 DATA 2,2,3
530 DATA 0,0,0
999 END
RUN
LAWCØS

```

THE SIDES ARE	A	B	C
THE ANGLES ARE	3	4	5
	36.87	53.13	90
THE SIDES ARE	300	400	500
THE ANGLES ARE	36.87	53.13	90
THE SIDES ARE	1.73205	1	2
THE ANGLES ARE	60	30	90
THE SIDES ARE	2	2	3
THE ANGLES ARE	41.41	41.41	97.18

DØNE

- ✓ 6) Write a program to solve the ambiguous case. Be sure to provide for no triangles, one triangle, or two triangles.
- ✓ 7) Rewrite problem 3) to handle degrees, minutes, and seconds.
- ✓ 8) Rewrite problem 4) to handle degrees, minutes, and seconds.
- 9) *Project:* Write a single program to process data in four uniquely determined cases. You might include the HL case.

9-4 POLAR COORDINATES

Every point in a rectangular coordinate system may be named by a unique pair of real numbers. The pair is usually designated (X, Y). If we plot a point (X, Y), we find that we may determine another ordered pair of numbers, one of which is the distance from the origin and the other is an angle measured from the positive portion of the X-axis to the ray with endpoint at the origin

and containing point (X, Y) . If we call the distance R and the measure of the angle G , we may designate a new ordered pair (R, G) . Refer to Fig. 9-1.

Ordered pairs of this kind are called *polar coordinates*. The ray consisting of the origin and the positive portion of the X -axis is called the *polar axis* and the origin is called the *pole*. Our new coordinate system appears in Fig. 9-8. Such a coordinate system is particularly adapted to plotting periodic functions with finite upper and lower bounds.

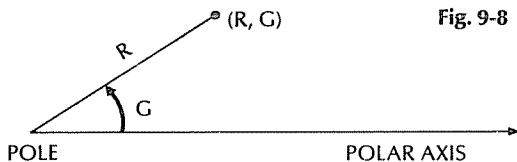


Fig. 9-8

Note that there is no one-to-one correspondence between ordered pairs and plotted points for the polar coordinate system. How do we designate the origin? $(0, 0^\circ)$? How about calling it $(0, 10^\circ)$ or $(0, -25^\circ)$? Also note that $(1, 45^\circ)$ and $(1, 405^\circ)$ name the same point. Any particular ordered pair does name a unique point, but every point may be named by an unlimited number of ordered number pairs in this polar coordinate system.

Looking at the polar equation $R = \cos G$ suggests that for some values of G we would like to allow R to take on negative values. So we extend the definition of R to permit this. The absolute value of R is the distance of the point from the pole and we define $(-R, G)$ and $(R, G + 180^\circ)$ to name the same point.

Some polar equations are relatively easy to convert to rectangular form. For instance,

$$R = 2 \cos G$$

is equivalent to

$$\sqrt{X^2 + Y^2} = \frac{2X}{\sqrt{X^2 + Y^2}}$$

which is equivalent to

$$X^2 + Y^2 - 2X = 0$$

which turns out to be a circle with radius 1 and center at the point $(1, 0)$. However, other polar equations are not so easily identifiable when converted and so are more appropriate to plot on a polar coordinate system. Consider,

$$R = 1 - 2 \cos G \quad (9-14)$$

$$R = 2 + \sin 2G \quad (9-15)$$

$$R = 1 + 2 \cos G - 3 \sin^2 G \quad (9-16)$$

No matter how you approach plotting any of these, you run into a tremendous amount of calculating.

We can easily get the coordinates of the points to plot for all three of these in the same computer program.

In program PØLAR we have simply defined a function for each of the Eqs. (9-14), (9-15), and (9-16), and put the value of the angle G in a loop to get values every 15 degrees. We are not obligated to define functions, but with converting to radians and rounding off to hundredths this seems a reasonable approach. Now if we want different functions we only need change the printing in line 10 and redefine the new functions in lines 30, 40, and 50. Of course the actual plotting is left to the student to do on polar coordinate paper.

PØLAR

```

5 LET K=3.14159/180
10 PRINT "ANGLE","1-2COS(G)","2+SIN(2G)","1+2COS(G)-3SIN(G)+2"
20 DEF FNR(X)=INT(X*100+.5)/100
30 DEF FNA(X)=1-2*COS(K*X)
40 DEF FNB(X)=2+SIN(2*K*X)
50 DEF FNC(X)=1+2*COS(K*X)-3*SIN(K*X)+2
60 FOR G=0 TO 360 STEP 15
70 PRINT G,FNR(FNA(G)),FNR(FNB(G)),FNR(FNC(G))
80 NEXT G
90 END
RUN
PØLAR

```

ANGLE	1-2COS(G)	2+SIN(2G)	1+2COS(G)-3SIN(G)+2
0	-1	2	3
15	-.93	2.5	2.73
30	-.73	2.87	1.98
45	-.41	3	.91
60	0	2.87	-.25
75	.48	2.5	-1.28
90	1	2	-2
105	1.52	1.5	-2.32
120	2	1.13	-2.25
135	2.41	1	-1.91
150	2.73	1.13	-1.48
165	2.93	1.5	-1.13
180	3	2	-1
195	2.93	2.5	-1.13
210	2.73	2.87	-1.48
225	2.41	3	-1.91
240	2	2.87	-2.25
255	1.52	2.5	-2.32
270	1	2	-2
285	.48	1.5	-1.28
300	0	1.13	-.25
315	-.41	1	.91
330	-.73	1.13	1.98
345	-.93	1.5	2.73
360	-1	2	3

DØNE

SUMMARY

The computer is an invaluable aid to obtaining values of ordered pairs of polar coordinates for polar equations.

PROBLEMS FOR SEC. 9-4

1) Obtain polar coordinates for plotting any of the following polar equations. (It would be instructive to plot the graph as well.)

(a) $R = \cos 2G$

(b) $R = \cos 3G$

(c) $R = \cos 4G$

(d) $R = \sin 2G$

(e) $R = \sin 3G$

(f) $R \cos G = 1$

(g) $R = 1 + R \cos G$

(h) $R = \sin G + \cos G$

2) Write a program to convert from polar coordinates to rectangular coordinates for any of the polar equations in problem 1).

✓ 3) Write a program to store rectangular coordinates in an array for any of the polar equations in problem 1) except (f) and (g) and then rearrange the ordered pairs in order of increasing values of X. Print the resulting set of ordered pairs. Plot the graph on rectangular coordinate paper and compare it with the plot obtained in problem 1).

CHAPTER 10

Complex Numbers

10-1 FUNDAMENTAL OPERATIONS

In the development of mathematics we find that we cannot solve the equation

$$X^2 + 1 = 0$$

if we are limited to real numbers. We want to say

$$X = \sqrt{-1} \quad \text{or} \quad X = -\sqrt{-1}$$

However, such numbers are not allowed in the real number system. So we define a new number i such that

$$i^2 = -1 \quad \text{or} \quad i = \sqrt{-1}$$

Then, if we should try to solve $X^2 + 2X + 2 = 0$ using the quadratic formula, we get

$$X = \frac{-2 \pm \sqrt{4 - 8}}{2} \quad \text{or} \quad X = \frac{-2 \pm \sqrt{-4}}{2}$$

and we decide to call $\sqrt{-4}$ the same number as $i\sqrt{4}$ which is $2i$. So now

$$X = \frac{-2 \pm 2i}{2}$$

$$\begin{aligned} \text{or } X &= -1 + i \\ &= -1 - i \end{aligned}$$

These two numbers are representative of complex numbers in rectangular form. In general, rectangular form is written as $a + bi$, where a and b are real numbers. Another number could be written $c + di$. Of course, the computer cannot handle $a + bi$ because it is limited to real numbers. But we can deal with the two real numbers a and b . This means that we will be working with complex numbers in ordered pair form or (a, b) form. Since the computer terminal is limited to capital letters, we use (A, B) .

For two complex numbers (A, B) and (C, D) we define equality:

$$(A, B) = (C, D)$$

if and only if

$$A = C \quad \text{and} \quad B = D \quad (10-1)$$

Their sum is found by

$$(A, B) + (C, D) = (A + C, B + D) \quad (10-2)$$

and their product is found by

$$(A, B) * (C, D) = (AC - BD, AD + BC) \quad (10-3)$$

Equations (10-1), (10-2), and (10-3) are relatively straightforward considerations for a computer program. We can test a pair of real numbers for equality with another pair or we can perform the addition of Eq. (10-2) or the multiplication of Eq. (10-3). As an example, let us write a short program to add two complex numbers on INPUT. See ADDA, B.

```
ADDA,B

10 PRINT "THIS PROGRAM ADDS TWO COMPLEX NUMBERS IN A,B FORM"
20 PRINT
30 PRINT " FIRST NUMBER";
40 INPUT A,B
50 IF A=999 THEN 999
60 PRINT " SECOND NUMBER";
70 INPUT C,D
80 PRINT "THE SUM IS (" ; A+C ; ", " ; B+D ; ")"
90 GOTO 20
999 END
RUN
ADDA,B

THIS PROGRAM ADDS TWO COMPLEX NUMBERS IN A,B FORM

FIRST NUMBER?1,4
SECOND NUMBER?0,0
THE SUM IS ( 1 , 4 )

FIRST NUMBER?1,5
SECOND NUMBER?3,8
THE SUM IS ( 4 , 13 )

FIRST NUMBER?-467,902
SECOND NUMBER?56,-1234
THE SUM IS (-411 ,-332 )

FIRST NUMBER?999,1

DONE
```

Subtraction and multiplication are also relatively straightforward. Now consider division:

$$(A, B) / (C, D) = (X, Y) \quad (10-4)$$

Equation (10-4) may be defined in terms of multiplication:

$$(A, B) = (X, Y) \circ (C, D)$$

$$(A, B) = (XC - YD, XD + YC)$$

By the definition of equality for complex numbers,

$$A = XC - YD \quad \text{and} \quad B = XD + YC$$

Solving for X and Y we get

$$X = \frac{AC + BD}{C^2 + D^2} \quad \text{and} \quad Y = \frac{BC - AD}{C^2 + D^2}$$

This is a little more complicated than the other operations, but still manageable.

SUMMARY

The computer may be programmed to work with complex numbers, if we represent them as ordered pairs of real numbers. The four fundamental operations of addition, subtraction, multiplication, and division may all be done by formula.

PROBLEMS FOR SEC. 10-1

- 1) Write a program to give the sum, difference, product, and quotient for pairs of complex numbers assigned as data.
- 2) Write a program to compute and print the complex roots of quadratic equations.
- 3) Write a program to test the commutative properties of both addition and multiplication for five pairs of complex numbers.
- 4) Demonstrate that subtraction and division are not commutative.
- 5) Write a program to generate random complex numbers. Then test the associative property for both addition and multiplication.
- ✓ 6) Find the reciprocal of complex numbers assigned as data.
- 7) Whenever we talk about ordered pairs of real numbers, the rectangular coordinate system should come to mind. Think of (A, B) as a plotted point on a graph with an A-axis and a B-axis. Write a program to find the distance from the origin of five complex numbers assigned as data.

10-2 POLAR COORDINATES

If we think of ordered pairs of real numbers as being associated with a rectangular coordinate system, we may plot a point representing (A, B) as shown in Fig. 10-1, where the distance from the B-axis is the absolute value of A and the distance from the A-axis is the absolute value of B.

Whenever we plot an ordered pair of real numbers on a rectangular coordinate system, we may associate the point with another ordered pair of real numbers. In the new pair, the first number is the distance from the origin and the second is the angle whose initial side is the positive A-axis and whose terminal side is the ray with an endpoint at the origin and containing the point

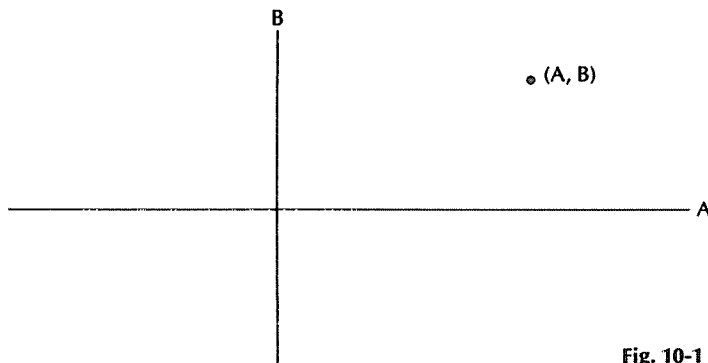


Fig. 10-1

(A, B) . We use R for the distance and call it the absolute value of the complex number (A, B) . R is found from (A, B) by

$$R = |(A, B)| = \sqrt{A^2 + B^2}$$

We use G for the angle. G may be found from (A, B) by

$$G = \arctan (A/B)$$

G is sometimes called the *argument of the complex number*. We may now refer to complex numbers in polar form as (R, G) . This form for complex numbers is the same as the form for (X, Y) ordered pairs converted to polar form in Chap. 9, with the one exception that we prefer not to allow R to be negative for complex numbers.

So we see that for every complex number we may choose a rectangular form or polar form depending on which form is appropriate to the problem at hand. We saw in Sec. 10-1 that addition and subtraction worked out easily in (A, B) form, but that multiplication and division were more cumbersome. Let us look at multiplication in (R, G) form.

It turns out that a third form will be helpful in establishing the multiplication algorithm. From (R, G) we get that $A = R \cos G$ and $B = R \sin G$, and similarly for $(R1, G1)$ we get that $C = R1 \cos G1$ and $D = R1 \sin G1$. Using the old formula to multiply (A, B) by (C, D) we get

$$\begin{aligned} (R \cos G, R \sin G) (R1 \cos G1, R1 \sin G1) \\ = (RR1 \cos G \cos G1 - RR1 \sin G \sin G1, \\ RR1 \sin G \cos G1 + RR1 \cos G \sin G1) \end{aligned}$$

After factoring, the right side becomes

$$(RR1(\cos G \cos G1 - \sin G \sin G1), RR1(\sin G \cos G1 + \cos G \sin G1)) \quad (10-5)$$

It can be shown that

$$\cos G \cos G1 - \sin G \sin G1 = \cos (G + G1) \quad (10-6)$$

and

$$\sin G \cos G1 + \cos G \sin G1 = \sin (G + G1) \quad (10-7)$$

Substituting Eqs. (10-6) and (10-7) into (10-5) we get

$$(RR1 \cos (G + G1), RR1 \sin (G + G1))$$

which is a plotted point associated with a distance from the origin of $RR1$ and an angle of $G + G1$. So

$$(R, G)(R1, G1) = (RR1, G + G1) \quad (10-8)$$

This means that to multiply two complex numbers in polar form we should multiply their absolute values and add their arguments. This is less cumbersome than the method of Sec. 10-1.

It follows from Eq. (10-8) that to divide two complex numbers in polar form we divide their absolute values and subtract their arguments:

$$(R, G)/(R1, G1) = (R/R1, G - G1)$$

Again this is less cumbersome than the formula of Sec. 10-1.

Let us multiply some randomly assigned complex numbers in polar form. We generate arguments in degrees and absolute values in units 1 to 10. See MLTR, G.

```
MLTR, G

10 DEF FNC(Z)=INT(Z*RND(Z)+1)
20 FOR X=1 TO 6
30 LET R=FNC(10)
40 LET G=FNC(360)
50 LET R1=FNC(10)
60 LET G1=FNC(360)
70 PRINT "(";R;",";G;")*(";R1;",";G1;")=(";R*R1;",";G+G1;")"
80 NEXT X
90 END
RUN
MLTR, G

( 10 , 135 )*( 2 , 311 )=( 20 , 446 )
( 6 , 98 )*( 9 , 341 )=( 54 , 439 )
( 9 , 6 )*( 1 , 231 )=( 9 , 237 )
( 10 , 95 )*( 8 , 307 )=( 80 , 402 )
( 6 , 60 )*( 5 , 356 )=( 30 , 416 )
( 10 , 139 )*( 2 , 343 )=( 20 , 482 )

DONE
```

SUMMARY

Complex numbers may be represented in polar form as (R, G) , where R is the absolute value and G is the angular location starting at the positive end of the A -axis on an (A, B) graph. We have seen that while addition and subtraction are easily done in (A, B) form, multiplication and division are better suited to (R, G) form. $(R, G)(R1, G1) = (RR1, G + G1)$ and $(R, G)/(R1, G1) = (R/R1, G - G1)$. To multiply in polar form, multiply absolute values and add arguments. To divide in polar form, divide absolute values and subtract arguments.

PROBLEMS FOR SEC. 10-2

- 1) Write a program to find the quotient of two complex numbers in polar form.
- 2) Write a program to print the positive integral powers of $(1, 45^\circ)$ from 1 to 8.
- 3) Write a program to convert from (R, G) form to (A, B) form.
- ✓ 4) Write a program to convert complex numbers from (A, B) form to (R, G) form. You will want to use the ATN(X) computer function here and be sure you have the angle in the correct quadrant. To check this, simply try numbers in all four quadrants.
- ✓ 5) Write a program to take two complex numbers in (A, B) form and print their product in (R, G) form.
- ✓ 6) Write a program to print the positive integral powers of a complex number in (A, B) form. Keep the result in (A, B) form.
- ✓ 7) Modify MLTR, G to generate negative as well as positive numbers for angles. Print the resulting angle as a value between -360 and $+360$ degrees.

10-3 POWERS AND ROOTS

We have seen that for multiplying two complex numbers the polar form provides a very convenient algorithm. If we wish to square a complex number, i.e., multiply it by itself, we get

$$(R, G)^2 = (R^2, G + G) \quad \text{or} \quad (R^2, 2G)$$

We also see that for a positive integer n ,

$$(R, G)^n = (R^n, nG) \tag{10-9}$$

It can also be shown that an n th root of (R, G) may be found by

$$(R, G)^{1/n} = (R^{1/n}, G/n) \tag{10-10}$$

where $R^{1/n}$ means $\sqrt[n]{R}$. Equations (10-9) and (10-10) constitute a portion of *De Moivre's theorem*. It can also be shown that every nonzero complex number has exactly n complex n th roots.

Let us find the four complex fourth roots of unity. By taking the square roots of the square roots of 1, we should get 1, i , -1 , and $-i$, which in (R, G) form are $(1, 0^\circ)$, $(1, 90^\circ)$, $(1, 180^\circ)$, and $(1, 270^\circ)$. Using De Moivre's theorem,

$$(1, 0^\circ)^{1/4} = (1^{1/4}, 0/4^\circ) \quad \text{or} \quad (1, 0^\circ)$$

However, there should be three more. Now we see that there is a tremendous advantage associated with the nonuniqueness for polar coordinates. By writing unity $(1, 0^\circ)$ as $(1, 360^\circ)$ we may apply Eq. (10-10) again:

$$(1, 360^\circ)^{1/4} = (1, 90^\circ)$$

Writing $(1, 0^\circ)$ as $(1, 720^\circ)$ we get

$$(1, 720^\circ)^{1/4} = (1, 180^\circ)$$

and finally $(1, 0^\circ) = (1, 1080^\circ)$ gives

$$(1, 1080^\circ)^{1/4} = (1, 270^\circ)$$

ROOTS

```

10 PRINT "TAKE ROOTS OF COMPLEX NUMBERS IN POLAR FORM"
20 READ R,G,N
30 PRINT "THE";N;"",";N;"TH ROOTS OF (";R;"",";G;"") ARE:"
40 FOR X=1 TO N
50 PRINT "(";R*(1/N);";","; G/N;"")"
60 LET G=G+360
70 NEXT X
80 PRINT
90 GOTO 20
100 DATA 1,0,4
110 DATA 1,0,3
120 DATA 1,45,2
130 DATA 3,90,3
140 END
RUN
ROOTS

```

```

TAKE ROOTS OF COMPLEX NUMBERS IN POLAR FORM
THE 4      , 4      TH ROOTS OF ( 1      , 0      ) ARE:
( 1.      , 0      )
( 1.      , 90     )
( 1.      , 180    )
( 1.      , 270    )

```

```

THE 3      , 3      TH ROOTS OF ( 1      , 0      ) ARE:
( 1.      , 0      )
( 1.      , 120    )
( 1.      , 240    )

```

```

THE 2      , 2      TH ROOTS OF ( 1      , 45     ) ARE:
( 1.      , 22.5    )
( 1.      , 202.5   )

```

```

THE 3      , 3      TH ROOTS OF ( 3      , 90     ) ARE:
( 1.44225 , 30      )
( 1.44225 , 150     )
( 1.44225 , 270     )

```

OUT OF DATA IN LINE 20

as expected. Suppose we add 360 degrees again. Then $G = 1440^\circ$ and $1440(1/4) = 360^\circ$ which we have already in $(1, 0^\circ)$. Finding roots of complex numbers in polar form becomes a very straightforward computer program. See ROOTS.

PROBLEMS FOR SEC. 10-3

- 1) In program ROOTS have the computer convert the roots to (A, B) form.
- ✓ 2) Write a program to find the n complex nth roots of complex numbers in (A, B) form and print the results in (A, B) form.
- ✓ 3) In program ROOTS print the roots in both (A, B) and polar form.

CHAPTER 11

Polynomials

11-1 FUNDAMENTAL OPERATIONS

We define a real polynomial in X as an expression that can be written in the form

$$A_N X^N + A_{N-1} X^{N-1} + \dots + A_2 X^2 + A_1 X + A_0$$

where N is a non-negative integer, X is a complex number, and the A_N are constant real coefficients. The following are examples of polynomials in X :

$$5 \quad X - 3 \quad X^8 + 3X^5 - X + 1 \quad X^2 + 3X - 4$$

For the polynomial 5, note that $5 = 5X^0$ so the polynomial consists of the term A_0 , which is 5. The number 0 is considered a polynomial. All real polynomials except the zero polynomials have degree i where $A_i X^i$ is the term of the polynomial with the greatest value of i for A_i not equal to 0. Polynomials may be used to describe many physical problems. For instance, the trajectory of a projectile is described by a second-degree polynomial.

We may perform operations on polynomials much as we perform operations on explicit numbers. You have had considerable experience adding and subtracting such expressions. You have often multiplied two binomials of the form $(AX + B)(CX + D)$. One of the problems in Chap. 1 was to perform just that multiplication by computer. We now develop a program to multiply two polynomials.

Multiplication

Clearly we will perform operations on the computer by working with the coefficients and being careful to line things up properly. This means being very much aware of missing terms and inserting zero coefficients where necessary. Let us begin with an example, say $(2X + 7)(3X^2 + 11X - 5)$. By hand we get

$$\begin{array}{r}
 3X^2 + 11X - 5 \\
 \underline{2X + 7} \\
 21X^2 + 77X - 35 \\
 6X^3 + 22X^2 - 10X \\
 \hline
 6X^3 + 43X^2 + 67X - 35
 \end{array}$$

where all the X^N were known in advance and do not depend on the coefficients. So the problem could have been done in the following manner:

$$\begin{array}{r}
 3 + 11 - 5 \\
 \underline{2 + 7} \\
 21 + 77 - 35 \\
 6 + 22 - 10 \\
 \hline
 6 + 43 + 67 - 35
 \end{array} \tag{11-1}$$

The program can be set up by putting 3, 11, and -5 in one computer list, 2 and 7 in another, and making provision for putting 6, 43, 67, and -35 in a third list. We may find the organization to be a little easier by thinking of the computation in Eq. (11-1) as being set up in columns numbered from right to left. (If your computer permits 0 subscripts in a list, you may use that to good advantage here by starting with 0.)

3	2	1	0	Column numbers
4	3	2	1	Column numbers
	3	+11	- 5	
		2	+ 7	
	21	+77	-35	
6	+22	-10		
6	+43	+67	-35	

We observe that when we multiply two numbers in column 1, we put the result in column 1; when we multiply a number from column 1 by a number from column 3, we put the result in column 3; and when we multiply a number in column 2 by a number in column 3 we put the result in column 4. This suggests that multiplying a number in column I by a number in column J calls for the result to go in column $(I + J - 1)$. [If 0 is allowed, then the result goes in column $(I + J)$.] So, if we store the two polynomials being multiplied in an F list and an S list and the product in a P list, our computer program will have an instruction to store $F[1] * S[J]$ in $P[I + J - 1]$. We must also provide for subtotals. Thus the program statement will be

XXX LET $P[I + J - 1] = P[I + J - 1] + F[I] * S[J]$

where we initialize the P list at 0. Program TRI * BI multiplies the two polynomials of our example.

It will be left as an exercise to modify TRI * BI to multiply pairs of polynomials of various degrees.

```

TRI*BI

8  REM LINES 10 THROUGH 40 READ AND PRINT THE FIRST POLYNOMIAL
10 FOR X=3 TO 1 STEP -1
20 READ F(X)
30 PRINT F(X);
40 NEXT X
50 PRINT "TIMES ";
58 REM LINES 60 THROUGH 90 READ AND PRINT THE SECOND POLYNOMIAL
60 FOR Y=2 TO 1 STEP -1
70 READ S(Y)
80 PRINT S(Y);
90 NEXT Y
98 REM 100 THROUGH 120 SET THE RESULT LIST AT ALL ZEROS
100 FOR W=1 TO 4
110 LET P(W)=0
120 NEXT W
128 REM LINES 130 THROUGH 170 DO THE ACTUAL MULTIPLYING
130 FOR I=1 TO 3
140 FOR J=1 TO 2
150 LET P(I+J-1)=P(I+J-1)+F(I)*S(J)
160 NEXT J
170 NEXT I
180 PRINT "YIELDS ";
188 REM AND NOW WE PRINT THE 'ANSWER LIST'
190 FOR Z=4 TO 1 STEP -1
200 PRINT P(Z);
210 NEXT Z
218 REM THE FIRST THREE NUMBERS REPRESENT 3X^2+11X-5
219 REM THE NEXT TWO NUMBERS REPRESENT 2X+7
220 DATA 3,11,-5,2,7
230 END
RUN
TRI*BI

3      11      -5      TIMES      2      7      YIELDS      6      43      67      -35
DONE

```

Division

When working with polynomials we often wish to perform the operation of division. It is especially frequent that we wish to divide by a polynomial of the form $X - R$ where R is a constant. Let us divide $2X^3 - 3X^2 - 10X + 3$ by $X - 3$ and see what can be done to computerize the operation. As with multiplication, we will end up considering only the coefficients. First we do the division by hand:

$$\begin{array}{r}
 2X^2 + 3X - 1 \\
 X - 3 \overline{) 2X^3 - 3X^2 - 10X + 3} \\
 \underline{2X^3 - 6X^2} \\
 3X^2 - 10X \\
 \underline{3X^2 - 9X} \\
 - X + 3 \\
 \underline{- X + 3} \\
 0
 \end{array}$$

Every term in the computation that will be written twice in every problem appears in bold face. Now if we simply decide not to write things twice and at the same time compress the problem vertically, we get

$$\begin{array}{r} 2X^2 + 3X - 1 \\ X - 3 \overline{) 2X^3 - 3X^2 - 10X + 3} \\ \underline{-6X^2 - 9X + 3} \\ 3X^2 - X \end{array}$$

We saw that for multiplication, as long as everything was lined up correctly, we could eliminate all the X's. Also note that we are dividing only by binomials of the form $X - R$, so the coefficient of X will always be 1. Let us not even write it. Now we have the division in the following form:

$$\begin{array}{r} 2 + 3 - 1 \\ -3 \overline{) 2 - 3 - 10 + 3} \\ \underline{-6 - 9 + 3} \\ 3 - 1 \end{array}$$

Since the coefficient of X in the divisor is always 1, the coefficient of each term in the quotient will always be the same as the coefficient of the leading term of the expression into which we divide the X term. Thus it is no accident that we see $3 - 1$ in the bottom row as well as in the answer. So, if we agree to simply insert the leading coefficient of the polynomial into which we are dividing $X - R$ in front of the bottom row of figures, we will always have the coefficients of the quotient polynomial and we would not need the top row. We now have reduced the problem to an iteration involving "multiply and subtract" repeatedly, and the division looks like

$$\begin{array}{r} -3 \overline{) 2 - 3 - 10 + 3} \\ \underline{-6 - 9 + 3} \\ 2 + 3 - 1 \end{array}$$

which we got by the following set of steps: 1) copy down the first coefficient of the original polynomial 2; 2) multiply 2 by -3 to get -6 and write it down under the second term of the original polynomial; 3) subtract to get 3, multiply 3 by -3 to get -9 ; 4) write it down beneath the next term to the right and subtract to get -1 ; 5) multiply -1 by -3 to get $+3$ and write it down beneath the next term; 6) subtract to get 0 and we have a 0 remainder. So we see that $2 + 3 - 1$ is interpreted as $2X^2 + 3X - 1$.

Since subtracting a number may be accomplished by multiplying the number to be subtracted by -1 and adding, we may convert "multiply and subtract" to "multiply and add" if we multiply the -3 by -1 to get 3. Or for $X - R$ we just use R . Let us complete the development of this algorithm by inserting the 0 in the last column to the right to indicate a remainder of 0.

$$\begin{array}{r} 3 \overline{) 2 - 3 - 10 + 3} \\ \underline{6 + 9 - 3} \\ 2 + 3 - 1 + 0 \end{array}$$

Dividing $3X^4 - 2X^2 + 5X - 2$ by $X + 2$ results in

$$\begin{array}{r} -2 \overline{) 3 + 0 - 2 + 5 - 2} \\ \underline{-6 + 12 - 20 + 30} \\ 3 - 6 + 10 - 15 + 28 \end{array}$$

yielding a quotient of $3X^3 - 6X^2 + 10X - 15$ and a remainder of 28.

Division by the algorithm we have just developed is usually called *synthetic division*. Since this is essentially an iterative process, we should be able to get the computer to perform division in this way. We put the original polynomial in a P list and the quotient polynomial in a Q list. Let us store the division constant in R. For every division problem of the kind we are working with here, the first coefficient in the quotient polynomial is the same as the first coefficient in the dividend polynomial. So we need a line in the program which says `LET Q[4] = P[4]`. See line 70 in program SYNDIV.

SYNDIV

```

5 PRINT "SYNTHETIC DIVISION:"
8 REM READ THE DIVISOR
10 READ R
18 REM READ AND PRINT ORIGINAL POLYNOMIAL IN LINES 20 THRU 50
20 FOR N=4 TO 1 STEP -1
30 READ P[N]
40 PRINT P[N];
50 NEXT N
60 PRINT "DIVIDED BY X -";R;"YIELDS"
68 REM FIRST QUOTIENT COEFFICIENT EQUALS FIRST
69 REM COEFFICIENT OF ORIGINAL POLYNOMIAL
70 LET Q[4]=P[4]
80 PRINT Q[4];
90 FOR X=3 TO 1 STEP -1
98 REM "MULTIPLY AND ADD"
100 LET Q[X]=P[X]+Q[X+1]*R
110 PRINT Q[X];
120 NEXT X
130 DATA 3,2,-3,-10,3
140 END
RUN
SYNDIV

```

```

SYNTHETIC DIVISION:
 2   -3   -10   3   DIVIDED BY X - 3   YIELDS
 2    3    -1    0

```

DONE

In SYNDIV, 2 3 -1 0 is to be interpreted as $2X^2 + 3X - 1$ with a remainder of 0. Let us try another:

```

130 DATA 2,3,-1,4,-5
RUN
SYNDIV

SYNTHETIC DIVISION:
 3   -1    4   -5   DIVIDED BY X - 2   YIELDS
 3    5   14   23

```

DONE

The 3 5 14 23 is to be interpreted as $3X^2 + 5X + 14$ with a remainder of 23.

SUMMARY

You should be able to add and subtract polynomials easily using computer lists. We have written an elementary program for multiplication of two polynomials, and we have written a program to perform synthetic division using $X - R$ as the divisor.

PROBLEMS FOR SEC. 11-1

- 1) Write a program to find the sum of two polynomials assigned as data. Be sure to avoid printing leading zero coefficients when adding pairs similar to $3X^4 + 6X - 4$ and $-3X^4 + 5X^3 - 3X + 1$.
- 2) Do problem 1) for subtraction.
- 3) Write a single program to add or subtract pairs of polynomials as determined by an item of data. (Example: use $S = 1$ for add and $S = 0$ for subtract.)
- 4) Prepare a program to multiply two polynomials of varying degrees.
- 5) Write a program to multiply three polynomials.
- 6) Generate pairs of random polynomials of random degree and multiply them. Print the original polynomials and the product. Be sure to allow negative coefficients.
- ✓ 7) Extend SYNDIV to divide $X - R$ into polynomials of any degree. Also have the computer print the remainders with a message to the effect that the remainder equals whatever it comes out to.
- ✓ 8) Write a program to print the first 11 integral powers of $(X + 1)$.
- ✓ 9) Write a program to divide any polynomial by any polynomial of equal or lesser degree. Suggestion: get data from problem 6.

11-2 INTEGRAL ZEROS

It is common practice to abbreviate any polynomial and call it $P_{(X)}$ for a polynomial in X (read as P of X). We often look at the polynomial equation

$$Y = P_{(X)}$$

and its graph. The values of X for which $Y = 0$ are called the *zeros of the function*. You have solved many quadratic functions in which there were always two zeros. Sometimes they were equal, sometimes integral, sometimes real, and sometimes complex. It can be shown that every N th-degree polynomial equation has exactly N complex zeros. Before we actually look for any zeros of $Y = P_{(X)}$ we need to have some theorems available.

Remainder Theorem

According to the *Remainder theorem*, if a polynomial is divided by $X - Z$, then the remainder is the value of the polynomial when Z is substituted for X . Dividing $P_{(X)}$ by $(X - Z)$ we get

$$\frac{P_{(X)}}{(X - Z)} = Q_{(X)} + \frac{R}{(X - Z)}$$

where $Q_{(X)}$ is the quotient polynomial. Multiplying through by $(X - Z)$ we get

$$P_{(X)} = Q_{(X)} \circ (X - Z) + R$$

and we can see that if we substitute Z for X, then $X - Z = 0$ and

$$P_{(Z)} = R \quad (11-2)$$

Looking at SYNDIV we see that substituting 3 for X in $2X^3 - 3X^2 - 10X + 3$ gives $54 - 27 - 30 + 3$ or 0, confirming that $P_{(3)} = 0$, which is the remainder after dividing by $X - 3$. We also see that substituting 2 for X in $3X^3 - X^2 + 4X - 5$ gives $24 - 4 + 8 - 5$ or 23, confirming that $P_{(2)} = 23$, which is the remainder after dividing by $X - 2$.

Factor Theorem

The *Factor theorem* states very simply that if the value of R in Eq. (11-2) is 0, then $X - Z$ is a factor of $P_{(X)}$. Looking at SYNDIV again, we see that $X - 3$ is a factor of $2X^3 - 3X^2 - 10X + 3$ while $X - 2$ is not a factor of $3X^3 - X^2 + 4X - 5$. Now all we have to do is find a value of Z so that $P_{(Z)} = 0$ and Z is a zero of the function.

Search for Integral Zeros

What integers do we try for Z to test $P_{(Z)}$ for 0? We have assumed that there are N complex zeros. Let us call them $Z_N, Z_{N-1}, \dots, Z_2, Z_1$. It can be shown that

$$\begin{aligned} (X - Z_N)(X - Z_{N-1}) \cdots (X - Z_2)(X - Z_1) \\ = A_N X^N + A_{N-1} X^{N-1} + \cdots + A_1 X + A_0 \end{aligned}$$

Multiplying the left side out we should see that the only constant term in the product is $(-Z_N)(-Z_{N-1}) \cdots (-Z_2)(-Z_1)$ which simplifies to $(-1)^N (Z_N)(Z_{N-1}) \cdots (Z_2)(Z_1)$ and must equal the constant term in the product polynomial which is A_0 . And so it follows that if a polynomial has any integral zeros, they must be factors of the constant term A_0 . That is not to say that all integral factors of A_0 are zeros of the polynomial.

This should provide sufficient basis for writing a computer program to find the integral zeros of a polynomial function. We can define a computer function and test for $PNP(X) = 0$ for all integral factors of the constant term. If we continue to enter the coefficients of polynomials in computer lists as we have been doing, then we know that the constant term will always be $P[1]$. For our first program, let us define our function using the list entries as coefficients in a DEF statement and look at only third-degree polynomials.

One feature of the program that requires comment is the finding of numbers to test for factors. These numbers must be in the interval $-P[1]$ to $P[1]$ including the end numbers. Well, if $P[1]$ is negative, we want to step -1 and if $P[1]$ is positive, we want to step $+1$. This is a perfect place to use $SGN(P[1])$. See line 80 of program INTZER. It would be useful to print that there are no integral zeros if that turns out to be the case. In order to do that, we need a switch which is off initially and which we turn on only if we

find at least one zero. Then after we test all possible factors of $P[1]$, we test to see if the switch is on. If it is, we read more data. If the switch is off, there were no zeros, so we print a message and then read more data. See the flowchart in Fig. 11-1.

INTZER works well for polynomials of the same degree; but suppose we have polynomials of several different degrees we wish to study using the same program? Well, we could define a different function for each degree or we could define a function of the highest degree we anticipate and fill in with leading zeros. But suppose we want up to ninth or tenth degree? The function would not fit on one line on some terminals. We could define two functions

INTZER

```

10 DEF FNP(X)=P[4]*X+3+P[3]*X+2+P[2]*X+P[1]
20 PRINT
22 PRINT
25 FOR S=4 TO 1 STEP -1
30 READ P[S]
40 PRINT P[S];
50 NEXT S
60 PRINT "INTEGRAL ZERO(S): ";
68 REM TURN SWITCH OFF
70 LET K=0
78 REM STUDY LINE 80 CAREFULLY!
80 FOR X=-P[1] TO P[1] STEP SGN(P[1])
88 REM LINE 90 PREVENTS AN ERROR MESSAGE CAUSED BY
89 REM DIVIDING BY ZERO
90 IF X=0 THEN 140
98 REM IS X A FACTOR OF P[1]?
100 IF P[1]/X <> INT(P[1]/X) THEN 140
108 REM IS THE REMAINDER ZERO?
110 IF FNP(X) <> 0 THEN 140
118 REM IF THE COMPUTER GETS THROUGH HERE, THE
119 REM VALUE OF X IS A ZERO OF THE FUNCTION
120 PRINT X;
128 REM TURN THE SWITCH ON - WE HAVE A ZERO
130 LET K=1
140 NEXT X
150 IF K=1 THEN 20
160 PRINT "NONE FOUND";
165 GOTO 20
170 DATA 1,-2,-11,12
180 DATA 1,1,-5,-2
190 DATA 1,-2,3,-4
200 DATA 2,-3,-10,3
210 END
RUN
INTZER

```

1	-2	-11	12	INTEGRAL ZERO(S):	-3	1	4
1	1	-5	-2	INTEGRAL ZERO(S):	2		
1	-2	3	-4	INTEGRAL ZERO(S):	NONE FOUND		
2	-3	-10	3	INTEGRAL ZERO(S):	3		

OUT OF DATA IN LINE 30

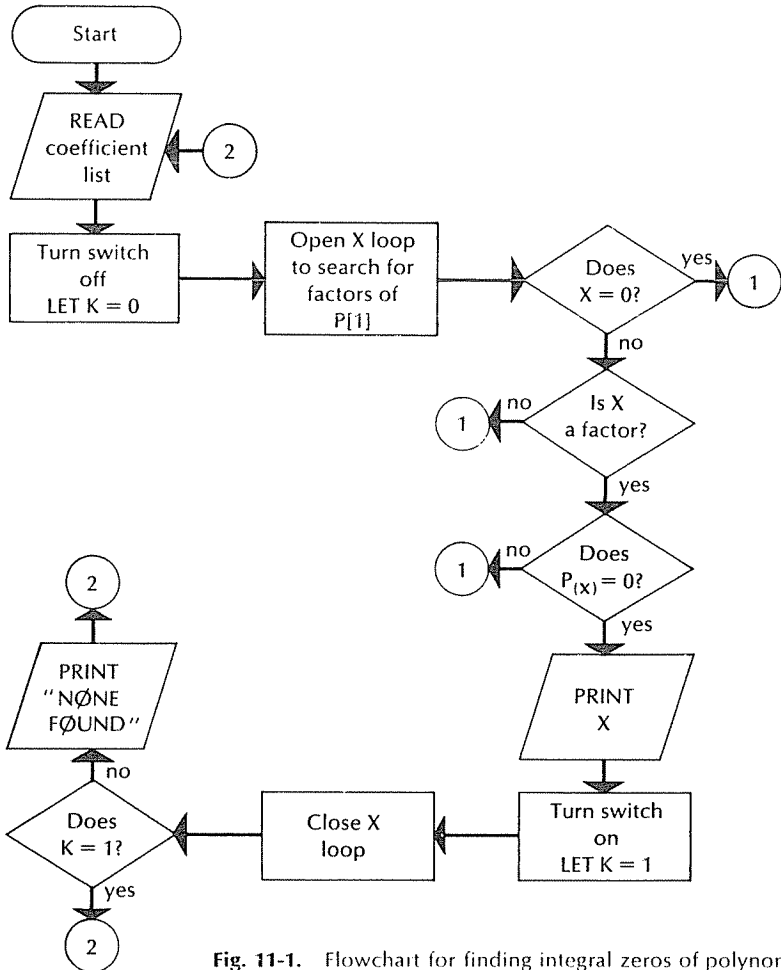


Fig. 11-1. Flowchart for finding integral zeros of polynomial.

and add them. But then we have large numbers of leading zeros to worry about. All of these complications may be eliminated by using a subroutine to define a function instead of a DEF statement. Notice that evaluating an Nth-degree polynomial is equivalent to summing up $N + 1$ terms which look like $A_i X^i$ where i goes from N to 0 . If you have 0 subscripts, this is perfect. For those of us without 0 subscripts, we must use a term similar to $P[I] * X ** (I - 1)$, where the value of I goes from N to 1 for N equal to one more than the degree of the polynomial.

We may now define a polynomial function in a five-line subroutine for any degree with no further complications and no fuss over leading zeros and such:

```

500 LET P = 0
510 FOR I = N TO 1 STEP -1

```

```

520 LET P = P + P[I] * X ** (I - 1)
530 NEXT I
540 RETURN

```

Let us insert GØSUB 500 after line 100 in INTZER, insert line 23 READ N, where N is the number of terms in the polynomial, and change line 25 to read FØR S = N TØ 1 STEP -1. See IZERØ1.

This program will handle up to ninth-degree polynomials. (Tenth, if you have 0 subscripts.) If we want to work with polynomials of greater degree, all we need is a DIM statement to specify a longer list for P.

SUMMARY

We have seen that by combining the Remainder theorem, the Factor theorem, and the fact that the product of all zeros multiplied by $(-1)^N$, where N is the degree of the polynomial, gives the constant term, we are able to find all integral zeros. We simply test all integral factors of the constant term to see if the remainder is 0. If the remainder is 0, then we have a zero of the polynomial. If it is not 0, then we do not have a zero of the polynomial. We have two alternative methods of evaluating a polynomial for a specified value of X: one is to use a DEF statement, and the other is to write a subroutine to sum up terms.

PROBLEMS FOR SEC. 11-2

1) For each of the polynomials to follow: (a) find an integral zero, (b) use synthetic division to find the resulting factor after dividing by $(X - Z)$, and (c) search for zeros of the depressed polynomial. Repeat until all integral zeros are found and then print the remaining polynomial.

$$10X^3 - 71X^2 - 76X + 32$$

$$6X^8 - 32X^7 - 23X^6 - 3X^5 - 12X^4 - 36X^3 - X^2 + 8X - 12$$

$$8X^5 - 18X^4 - 8X^3 - 32X^2 + 2X + 3$$

$$2X^4 + 5X^3 - 31X^2 - 21X + 45$$

2) Generate random integers in sets of three. Have the computer print the polynomial having those three integers as zeros. Be sure to get some negative integers.

3) Do problem 2) for sets of four integers.

4) In IZERØ1 have the computer determine if $P_{(X)}$ is within two units of 0 for each factor of the constant term.

5) Prepare a table of ordered pairs $(X, P_{(X)})$ such as would be appropriate for plotting points. Sketch a graph on graph paper. How would you estimate non-integral zeros?

11-3 REAL ZEROS

It can be shown that for a polynomial, if $P_{(X_1)} > 0$ and $P_{(X_2)} < 0$, then there is a value of X between X_1 and X_2 such that $P_{(X)} = 0$. This is called the *Location Principle*. In graphical terms, the Location Principle may be stated as

IZER01

```

20 PRINT
22 PRINT
23 READ N
25 FOR S=N TO 1 STEP -1
30 READ P[S]
40 PRINT P[S];
50 NEXT S
55 PRINT
60 PRINT "INTEGRAL ZERO(S): ";
68 REM TURN SWITCH OFF
70 LET K=0
78 REM STUDY LINE 80 CAREFULLY!
80 FOR X=-P[1] TO P[1] STEP SGN(P[1])
88 REM LINE 90 PREVENTS AN ERROR MESSAGE CAUSED BY
89 REM DIVIDING BY ZERO
90 IF X=0 THEN 140
98 REM IS X A FACTOR OF P[1]?
100 IF P[1]/X <> INT(P[1]/X) THEN 140
105 GOSUB 500
108 REM IS THE REMAINDER ZERO?
110 IF P <> 0 THEN 140
118 REM IF THE COMPUTER GETS THROUGH HERE, THE
119 REM VALUE OF X IS A ZERO OF THE FUNCTION
120 PRINT X;
128 REM TURN THE SWITCH ON - WE HAVE A ZERO
130 LET K=1
140 NEXT X
150 IF K=1 THEN 20
160 PRINT "NONE FOUND";
165 GOTO 20
170 DATA 4,1,-2,-11,12
180 DATA 4,1,1,-5,-2
190 DATA 4,1,-2,3,-4
200 DATA 5,2,-1,-11,11,-2
210 DATA 7,2,-5,-6,9,9,-39,36
490 REM SUBROUTINE 500 THROUGH 540 TAKES THE PLACE OF A
491 REM DEF STATEMENT AND EVALUATES A POLYNOMIAL OF
492 REM OF DEGREE N-1.
500 LET P=0
510 FOR I=N TO 1 STEP -1
520 LET P=P+P[I]*X^(I-1)
530 NEXT I
540 RETURN
999 END
RUN
IZER01

```

```

1      -2      -11      12
INTEGRAL ZERO(S):  -3      1      4

```

```

1      1      -5      -2
INTEGRAL ZERO(S):  2

```

```

1      -2      3      -4
INTEGRAL ZERO(S):  NONE FOUND

```

```

2      -1      -11      11      -2
INTEGRAL ZERO(S):  2

```

```

2      -5      -6      9      9      -39      36
INTEGRAL ZERO(S):  3

```

OUT OF DATA IN LINE 23

follows: If point $(X_1, P_{(X_1)})$ and point $(X_2, P_{(X_2)})$ are on opposite sides of the X-axis, then the graph must cross the X-axis between $(X_1, 0)$ and $(X_2, 0)$.

We may now search for real zeros by finding intervals in which the graph crosses the X-axis. In order to find out if the value of the function is positive for one value of X and negative for another, we may simply test the product. If the product is negative, they are of opposite sign. If the product is positive, then they are of the same sign and we are not concerned with those values of X. Since we anticipate more than one zero, let us make a provision for putting the information in a list. For that, we need a counter. It seems reasonable to list the left number of the interval. As long as we know the increment, we should be able to see the right number of the interval. It is usual to start looking for real zeros in an increment of one unit. Let us prepare a flowchart for this problem and call the program REAL. See Fig. 11-2.

Thus, we have found that the three zeros of $12X^3 - 64X^2 + 17X + 195$ fall in the three intervals -2 to -1 , 2 to 3 , and 3 to 4 . That is fine to know, but we generally prefer more precision than that. So, we should try to improve on

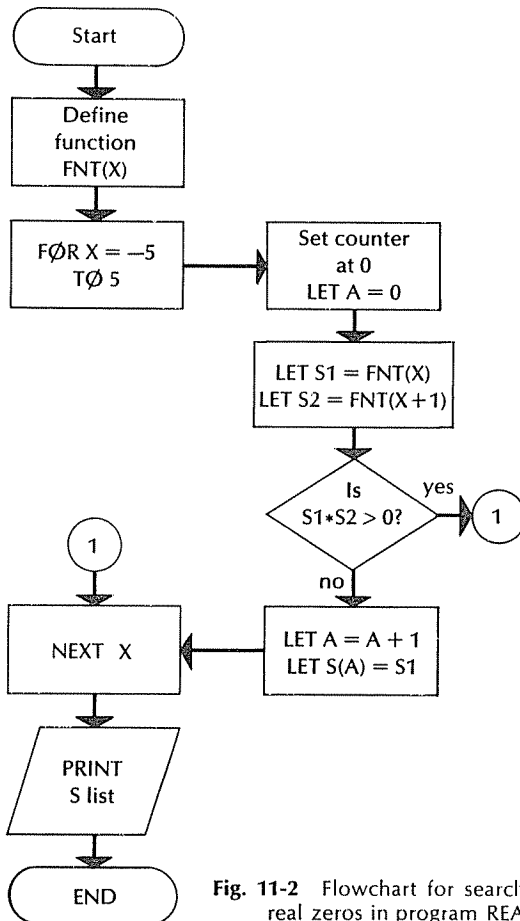


Fig. 11-2 Flowchart for searching for real zeros in program REAL.

REAL

```

50 DEF FNT(X)=12*X^3-64*X^2+17*X+195
60 LET A=0
70 FOR X=-5 TO 5
80 LET S1=FNT(X)
90 LET S2=FNT(X+1)
100 IF S1*S2>0 THEN 130
110 LET A=A+1
120 LET S(A)=X
130 NEXT X
190 PRINT "INTERVAL(S) BEGIN AT:"
200 FOR I=1 TO A
210 PRINT S(I);
220 NEXT I
270 END
RUN
REAL

```

```

INTERVAL(S) BEGIN AT:
-2      2      3
DONE

```

REAL to get smaller intervals. There are several very satisfactory procedures one might try. Let us develop a program that permits us to make decisions about what to try for the limits and the increment of the search. That calls for INPUT statements. We can change line 70 to `70 FOR X = F TO L STEP S` and INPUT F, L, S for First, Last, and Step. We may also use `S = 0` as a flag to terminate the RUN. After we get the computer to search for a change of sign in a particular interval, we want it to come back and permit us to either look for more precision in that same interval or to search in a different interval. We should also provide for the situation where there has been no change in sign. This will happen for one of several reasons. Either the search is not including the zeros within its limits, or the increment is large enough that two zeros are included in one interval, or there might be no real zeros. We will discuss this in Sec. 11-4. We can determine that no change of sign has been found by testing the value of A after line 130. If A is still 0, then there were no changes of sign and we should print a message to that effect. We make the above changes and call the program REAL1.

REAL 1

```

10 PRINT "SEARCH FOR REAL ZEROS OF A POLYNOMIAL"
20 PRINT "START, END, INCREMENT";
30 INPUT F,L,S
40 IF S=0 THEN 270
50 DEF FNT(X)=12*X^3-64*X^2+17*X+195
60 LET A=0
70 FOR X=F TO L STEP S
80 LET S1=FNT(X)
90 LET S2=FNT(X+S)
100 IF S1*S2>0 THEN 130
110 LET A=A+1
120 LET S(A)=X
130 NEXT X
140 IF A>0 THEN 190
150 PRINT "NO INTERVALS FOUND **** TRY AGAIN "

```

```

160 PRINT "WITH EITHER GREATER LIMITS OR SMALLER INCREMENT"
170 PRINT
180 GOTO 20
190 PRINT "INTERVAL(S) BEGIN AT:"
200 FOR I=1 TO A
210 PRINT S(I);
220 NEXT I
230 PRINT
240 PRINT
250 PRINT "NOW ";
260 GOTO 20
270 END
RUN
REAL 1

```

```

SEARCH FOR REAL ZEROS OF A POLYNOMIAL
START, END, INCREMENT?-5,5,1
INTERVAL(S) BEGIN AT:
-2      2      3

```

```

NOW START, END, INCREMENT?-3,-2,.1
NO INTERVALS FOUND **** TRY AGAIN
WITH EITHER GREATER LIMITS OR SMALLER INCREMENT

```

```

START, END, INCREMENT?-2,-1,.1
INTERVAL(S) BEGIN AT:
-1.5

```

```

NOW START, END, INCREMENT?-1.5,-1.4,.01
INTERVAL(S) BEGIN AT:
-1.45

```

```

NOW START, END, INCREMENT?2,3,.1
INTERVAL(S) BEGIN AT:
2.8

```

```

NOW START, END, INCREMENT?1,2,0

```

```

DONE

```

Since we are using INPUT often in this program, we should pick limits and increments carefully. We should also be prepared to make up our mind quickly. Some of the things we should not try are -50 to 50 STEP .01, or 50 to -50 STEP 1. A little care should avoid such blunders.

Let us define a new function and obtain another RUN.

```

50 DEF FNT(X)=X^3+49.1809*X^2+2.67761*X-15223.8
RUN
REAL 2

```

```

SEARCH FOR REAL ZEROS OF A POLYNOMIAL
START, END, INCREMENT?-10,10,1
NO INTERVALS FOUND **** TRY AGAIN
WITH EITHER GREATER LIMITS OR SMALLER INCREMENT

```

```

START, END, INCREMENT?-100,100,5
INTERVAL(S) BEGIN AT:
-40    -30    15

```

```

NOW START, END, INCREMENT?-40,-35,.1
INTERVAL(S) BEGIN AT:
-39.3

```

```

NOW START, END, INCREMENT?-39.3,-39.2,.01
INTERVAL(S) BEGIN AT:
-39.22

NOW START, END, INCREMENT?15.20,.1
INTERVAL(S) BEGIN AT:
15.3

NOW START, END, INCREMENT?15.3,15.4,.01
INTERVAL(S) BEGIN AT:
15.33

NOW START, END, INCREMENT?0,0,0

DONE

```

One of the contingencies that we have not accounted for in REAL1 is the possibility that the polynomial has integral zeros. As the program stands, if S1 or S2 equals 0, then the value of X used for S1 will be identified as the number at the beginning of the interval in which a real zero will be found. It will be left as an exercise to identify a zero more explicitly if S1 or S2 does equal 0.

SUMMARY

We have used the Location Principle to find intervals within which real zeros are expected to occur. It should be noted that the Location Principle may be applied to any continuous function and is not limited to polynomial functions.

PROBLEMS FOR SEC. 11-3

1) Modify REAL1 so that if the value picked for X in line 70 gives either S1 or S2 equal to 0, we get a message and the value of the zero printed.

2) In program REAL1, after the computer has found the initial intervals for all real zeros, we do not want the computer to search the entire intervals specified in subsequent searches in the X-loop. We want the computer to print immediately after finding the change in sign without searching the rest of the interval. Incorporate this into the program.

3) Modify REAL1 to read data for more than one polynomial. You may use some dummy value for S in line 30 as a signal to read the next set of data.

✓ 4) Write a program to search for real zeros by first finding the unit intervals and then using linear interpolation until FNT(X) is within 10^{-4} of zero. You may want to specify less or greater precision.

11-4 COMPLEX ZEROS

The simplest real polynomial for which we may find complex zeros is the second-degree polynomial $A_2X^2 + A_1X + A_0$. We may use the general quadratic formula

$$X = \frac{-A_1 \pm \sqrt{A_1^2 - 4A_2A_0}}{2A_2} \quad (11-3)$$

Letting the radicand equal D we get

$$D = A_1^2 - 4A_2A_0$$

D is called the *discriminant* of the quadratic expression. We can see that if D is negative, the zeros are nonreal. We can rewrite Eq. (11-3) as

$$X = \frac{-A_1}{2A_2} \pm \frac{\sqrt{D}}{2A_2}$$

and finally, considering X as being associated with two numbers A and B, we let

$$A = \frac{-A_1}{2A_2} \quad \text{and} \quad B = \frac{\sqrt{|D|}}{2A_2}$$

If D is greater than or equal to 0, the real zeros are

$$X1 = A + B \quad \text{and} \quad X2 = A - B \quad (11-4)$$

But if D is less than 0, we get the nonreal zeros

$$X1 = (A, B) \quad \text{and} \quad X2 = (A, -B) \quad (11-5)$$

So, in our computer program we compute D, A, and B. Then we test D. If D is negative, we print as in Eq. (11-5) and if D is not negative, we print as in Eq. (11-4). See Fig. 11-3 for the flowchart. We call the program CØMP-1.

It turns out that there is no convenient general procedure for finding nonreal zeros for polynomials of higher degree than two. But for any polynomial that has exactly two nonreal zeros, we may find the real zeros first, then for each real zero Z we may divide out the corresponding $X - Z$ using synthetic division and if after all division is carried out the result is a second-degree polynomial, we may apply the technique of program CØMP-1. We demonstrate this procedure by an elementary example: Find all zeros of the following polynomials, given that each has at least one integral zero:

$$\begin{aligned} X^3 + 2X^2 - X - 2 \\ X^3 - X^2 - 48 \\ X^3 - 1 \\ X^3 + 1 \\ X^3 - X^2 + X - 1 \\ 6X^3 - 77X^2 - 189X - 90 \end{aligned}$$

This is of course a special case, but it should help us develop a more general approach. Since we have a third-degree polynomial with one integral zero, we may take program INTZER to find the integral zero Z and then use program SYNDIV to divide the given polynomial by $X - Z$. The polynomial we get is called a *depressed polynomial*. We know that in this problem each depressed polynomial will be a second-degree polynomial. So we may then use program CØMP-1. In each of these earlier programs the polynomials were all represented with the same variable P list. So all that will have to be changed is the various READ statements and the variable in which the integral zero in INTZER is called X, while in SYNDIV the corresponding number was stored in R. Thus the need for line 170 in program ALLZER. We also changed

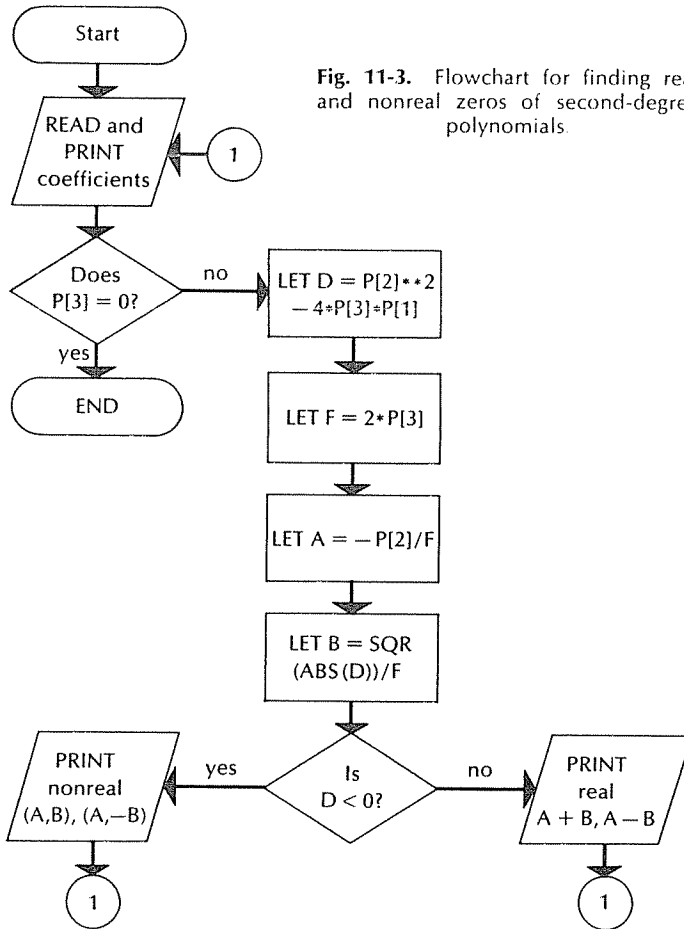


Fig. 11-3. Flowchart for finding real and nonreal zeros of second-degree polynomials.

COMP-1

```

10 PRINT
20 READ P[3],P[2],P[1]
30 IF P[3]=0 THEN 170
40 PRINT P[3],P[2],P[1]
50 LET D=P[2]**2-4*P[3]*P[1]
60 LET F=2*P[3]
70 LET A=-P[2]/F
80 LET B=SQR(ABS(D))/F
90 IF D<0 THEN 130
100 PRINT "REAL ZEROS:"
110 PRINT A+B;"AND "A-B
120 GOTO 10
130 PRINT "NON-REAL ZEROS:"
140 PRINT "("A;"",B) AND ("A;"",-B)
150 GOTO 10
160 DATA 1,2,3,1,-3,2,1,3,2,1,3,13,-1,2,-3,1,3,12,0,0,0
170 END
  
```

```
RUN
COMP-1
```

```

1      2      3
NON-REAL ZEROS:
(-1      , 1.41421      ) AND (-1      , -1.41421      )

1      -3      2
REAL ZEROS:
2      AND      1

1      3      2
REAL ZEROS:
-1      AND      -2

1      3      13
NON-REAL ZEROS:
(-1.5      , 3.27872      ) AND (-1.5      , -3.27872      )

-1      2      -3
NON-REAL ZEROS:
( 1      , -1.41421      ) AND ( 1      , 1.41421      )

1      3      12
NON-REAL ZEROS:
(-1.5      , 3.1225      ) AND (-1.5      , -3.1225      )
```

```
DONE
```

```
ALLZER
```

```

8 REM INTZER BEGINS HERE (WE HAVE REMOVED THE REM STATEMENTS)
9 REM SEE THE PROGRAM FOR REM STATEMENTS
10 DEF FNP(X)=P[4]*X+3+P[3]*X+2+P[2]*X+P[1]
20 PRINT
30 PRINT
40 FOR S=4 TO 1 STEP -1
50 READ P[S]
60 IF P[S]=.0101 THEN 430
70 PRINT P[S];
80 NEXT S
90 PRINT "INTEGRAL ZEROS: ";
100 FOR X=-P[1] TO P[1] STEP SGN(P[1])
110 IF X=0 THEN 160
120 IF P[1]/X <> INT(P[1]/X) THEN 160
130 IF FNP(X) <> 0 THEN 160
140 PRINT X
150 GOTO 170
160 NEXT X
164 REM INTZER ENDS HERE *** SYNDIV BEGINS HERE
170 LET R=X
180 PRINT "SYNTHETIC DIVISION BY X -";R;" YIELDS:"
190 PRINT P[4];
200 FOR X=3 TO 1 STEP -1
210 LET P[X]=P[X]+P[X+1]*R
220 IF X>1 THEN 240
230 PRINT "REMAINDER =";
240 PRINT P[X];
250 NEXT X
252 REM SYNDIV ENDS HERE
258 REM HERE WE MOVE EACH ENTRY IN THE P LIST
259 REM TO THE LOCATION ONE SUBSCRIPT LOWER
```

```

260 FOR X=1 TO 3
270 LET P[X]=P[X+1]
280 NEXT X
290 PRINT
298 REM COMP-1 BEGINS HERE
300 LET D=P[2]+2-4*P[3]*P[1]
310 LET F=2*P[3]
320 LET A=-P[2]/F
330 LET B=SQR(ABS(D))/F
340 IF D<0 THEN 380
350 PRINT "REAL ZEROs:"
360 PRINT A+B;"AND "A-B
370 GOTO 20
380 PRINT "NON-REAL ZEROs:"
390 PRINT "("A;"",B;"") AND "("A;"",-B;"")
400 GOTO 20
405 DATA 1,2,-1,-2
410 DATA 1,-1,0,-48,1,0,0,-1,1,0,0,1,1,-1,1,-1
415 DATA 6,-77,-189,-90
420 DATA .0101
430 END

```

```

RUN
ALLZER

```

```

1      2      -1      -2      INTEGRAL ZERO:      1
SYNTHETIC DIVISION BY X - 1      YIELDS:
1      3      2      REMAINDER = 0
REAL ZEROs:
-1      AND      -2

```

```

1      -1      0      -48      INTEGRAL ZERO:      4
SYNTHETIC DIVISION BY X - 4      YIELDS:
1      3      12      REMAINDER = 0
NON-REAL ZEROs:
(-1.5      , 3.1225      ) AND (-1.5      , -3.1225      )

```

```

1      0      0      -1      INTEGRAL ZERO:      1
SYNTHETIC DIVISION BY X - 1      YIELDS:
1      1      1      REMAINDER = 0
NON-REAL ZEROs:
(-.5      , .866025      ) AND (-.5      , -.866025      )

```

```

1      0      0      1      INTEGRAL ZERO:      -1
SYNTHETIC DIVISION BY X --1      YIELDS:
1      -1      1      REMAINDER = 0
NON-REAL ZEROs:
( .5      , .866025      ) AND ( .5      , -.866025      )

```

```

1      -1      1      -1      INTEGRAL ZERO:      1
SYNTHETIC DIVISION BY X - 1      YIELDS:
1      0      1      REMAINDER = 0
NON-REAL ZEROs:
( 0      , 1      ) AND ( 0      , -1      )

```

```

6      -77      -189      -90      INTEGRAL ZERO:      15
SYNTHETIC DIVISION BY X - 15      YIELDS:
6      13      6      REMAINDER = 0
REAL ZEROs:
-.666667      AND      -1.5

```

```

DONE

```

the way in which the quotient was stored in SYNDIV. It turns out that the quotient polynomial can be stored right back in the P list instead of creating the new Q list. This is done in line 210 of ALLZER. Then in order to avoid changing the subscripts in CØMP-1 it seems reasonable to simply take the quotient polynomial, which also stores the remainder in the lowest subscripted location, and move every entry into the location one subscript lower. Instead of having the quotient polynomial in P[4], P[3], and P[2], we are putting the quotient polynomial in P[3], P[2], and P[1], which exactly fits program CØMP-1. This is done in lines 260, 270, and 280.

As always, some interesting problems have been left for you to solve. For instance, suppose we have third-degree polynomials with two nonreal zeros and a real zero that is not an integer, or what about higher degree polynomials? These considerations are left as exercises in the problems set for Sec. 11-4.

Descartes' Rule of Signs

We may define the *variation* in a sequence of numbers as the number of changes in sign found by comparing successive pairs of adjacent numbers. For example, for the sequence 1, 3, 4, -8, 2, the value of V is 2. There is no change for 1 to 3 or 3 to 4. There is one change for 4 to -8 and for -8 to 2. If zeros appear in the sequence, we drop them. The sequence -2, 8, 0, 5, -3, 6 becomes -2, 8, 5, -3, 6 in order to determine the number of variations which is 3.

Descartes' Rule of Signs says that for

$$A_N X^N + A_{N-1} X^{N-1} + \cdots + A_1 X + A_0$$

the number of positive zeros depends on the number of variations in the sequence

$$A_N, A_{N-1}, \dots, A_1, A_0$$

in the following manner. If V is the number of variations, then the number of positive zeros is either V or V - 2 or V - 4, etc., but not less than 0. This may be written $V - 2I$, where I is a positive integer.

It turns out that we may find a corresponding number for negative zeros by finding positive zeros for $P_{(-X)}$. Substituting -X for X will change the sign of all terms which have an odd exponent on X. So if $P_{(X)} = -4X^5 - 3X^4 + 5X^3 - 2X^2 + X - 3$, the value of V is 4 and there must be 4 or 2 or 0 positive zeros. Now we find $P_{(-X)} = +4X^5 - 3X^4 - 5X^3 - 2X^2 - X - 3$, and V is 1. So there must be exactly one negative zero.

This is something we can get the computer to do for us. We may read the coefficients into the first row of a P array and change the sign of the coefficients of the terms with odd exponents on X and put the new coefficient list in the second row of the P array. Then we may look for changes in sign and provide two counters: one for the first row keeping track of changes of sign for the positive zeros, and the other for the second row counting sign changes for the negative zeros. These are V1 for the positive zeros and V2 for the negative zeros in program DESCRT.

DESCRT

```

10 READ N
15 IF N=0 THEN 999
20 FOR X=N TO 1 STEP -1
30 READ P[1,X]
40 PRINT P[1,X];
48 REM ENTER THE SAME COEFFICIENT IN THE SAME COLUMN
49 REM OF THE SECOND ROW
50 LET P[2,X]=P[1,X]
58 REM IF THE EXPONENT ON X IS ODD THEN CHANGE THE SIGN
60 IF (X+1)/2=INT((X+1)/2) THEN 80
70 LET P[2,X]=-P[2,X]
80 NEXT X
90 PRINT
100 PRINT N-1;"COMPLEX ZEROS"
200 LET V1=V2=0
210 FOR X=N-1 TO 1 STEP -1
218 REM LOOK AT POSITIVE ZEROS
220 IF P[1,X]*P[1,X+1]>0 THEN 240
230 LET V1=V1+1
238 REM LOOK AT NEGATIVE ZEROS
240 IF P[2,X]*P[2,X+1]>0 THEN 260
250 LET V2=V2+1
260 NEXT X
300 PRINT V1;"MAX POSITIVE"
310 PRINT V2;"MAX NEGATIVE"
320 PRINT
340 GOTO 10
500 DATA 4,6,103,201,90
510 DATA 5,1,3,4,-8,2
520 DATA 6,-4,-3,5,-2,1,-3
600 DATA 0
999 END
RUN
DESCRT

```

```

6      103    201    90
3      COMPLEX ZEROS
0      MAX POSITIVE
3      MAX NEGATIVE

1      3      4      -8      2
4      COMPLEX ZEROS
2      MAX POSITIVE
2      MAX NEGATIVE

-4     -3      5      -2      1      -3
5      COMPLEX ZEROS
4      MAX POSITIVE
1      MAX NEGATIVE

```

DONE

You might reasonably ask, just what have we done that could not be done quicker by hand. Well, maybe not much, but look at 6 103 201 90 in DESCRT. If we run these coefficients through INTZER, the computer tests $P[1]/X$ 180 times (from -90 to 90 skipping 0). We may now use DESCRT and change the limits on the test loop in INTZER to test no positive values of X . So the computer will now test a maximum of 90 values of X . We could take this one step further and use the fact that the maximum number of

negative zeros is three to transfer out of the loop after the third value is found if they all are integral.

There is more to Descartes' Rule of Signs than appears in program DESCRT. The rule states that zero coefficients are to be dropped. DESCRT does not provide for that. You will find that when zero coefficients appear, we may consider polynomials such as

$$P_{(X)} = 3X^4 + 2X^3 - 5X^2 - 7$$

V1 for positive zeros gives us 1. The coefficients for $P_{(-X)}$ are 3, -2, -5, -7, and V2 is 1. Since there are no 0 zeros, there are a total of two real zeros. Since there are 4 complex zeros, we find that there are two nonreal zeros for $P_{(X)}$.

SUMMARY

Once again we have used polynomial coefficients stored in a computer list. This time we find all zeros whenever no more than two zeros are nonintegral. In addition, we have used Descartes' Rule of Signs to obtain the possible numbers of positive and negative zeros and outlined a procedure for determining the possible numbers of nonreal zeros.

PROBLEMS FOR SEC. 11-4

1) Modify DESCRT to permit zero coefficients. Read all coefficients into a P list and then eliminate the zero coefficients as you enter them into a two-row array.

2) Modify ALLZER to handle polynomials of degree greater than three which have for degree D at least $D - 2$ integral zeros.

✓ 3) Write a program to generate polynomials of random degree D which are guaranteed to have exactly $D - 2$ integral zeros and two nonreal zeros.

4) *Project:* Modify your program in problem 2) to handle $D - 2$ real zeros using linear interpolation until $P(x)$ is within .001 of 0. (You may want to change the tolerance.)

5) *Project:* Use DESCRT to modify ALLZER to reduce the number of tests for polynomials similar to $6X^3 + 103X^2 + 201X + 90$.

CHAPTER 12

MAT Instructions in BASIC

12-1 INTRODUCTION TO MAT INSTRUCTIONS

MAT instructions are BASIC statements which allow us to manipulate entire arrays in the computer without being required to do it entry by entry. This capability will enable us to write shorter programs, using arrays, than we have been able to write thus far.

We have had to assign values of array entries one at a time. We have been putting `LET A[I, J] =` or `READ A[I, J]` in a nested loop for assignment and then in order to print the array, we have been putting `PRINT A[I, J]`; in another nested loop. In order to print out a 3 by 4 array consisting of -1's, we

MAT-1

```
8 REM LINES 10 TO 50 ASSIGN VALUES
10 FOR R=1 TO 3
20 FOR C=1 TO 4
30 LET A[R,C]=-1
40 NEXT C
50 NEXT R
98 REM LINES 100 TO 160 PRINT THE ARRAY
100 FOR R=1 TO 3
110 FOR C=1 TO 4
120 PRINT A[R,C];
130 NEXT C
140 PRINT
150 PRINT
160 NEXT R
200 END
RUN
MAT-1
```

```
-1    -1    -1    -1
-1    -1    -1    -1
-1    -1    -1    -1
```

DONE

MAT-2

```

10 DIM A[3,4]
20 MAT READ A
30 MAT PRINT A;
40 DATA -1,-1,-1,-1,-1,-1,-1,-1,-1,-1,-1,-1
50 END
RUN
MAT-2

```

```

-1    -1    -1    -1
-1    -1    -1    -1
-1    -1    -1    -1

```

DONE

would proceed as in MAT-1, using programming statements and techniques with which we are familiar. MAT-1 certainly does what we said we would do.

But consider MAT-2, which is a five-line program that does what required 13 lines to do in MAT-1. In MAT-2, line 10 instructs the computer to set up a 3 by 4 array. Then line 20 reads the data into the array named and dimensioned in line 10. (Some of you who had 0 subscripts will find that as soon as you specify a MAT instruction for a particular variable you also lose 0 subscripts for that variable. Others will find the situation unchanged. This depends on the system.) Note in line 20 a semicolon appears after the array A. Used in this way we are specifying semicolon spacing. To get comma spacing, we may place a comma there or leave it blank. If we wish to specify printing for several arrays in one print instruction, we may do so as follows:

```
XXX MAT PRINT A,B;C
```

In this case A and C will be printed with comma spacing, and B will be printed with semicolon spacing.

In MAT-2 it may not be clear just how the computer takes the numbers in the data line and enters them in the array locations. MAT-3 is intended to show what numbers are entered where in the array.

MAT-3

```

10 DIM A[3,5]
20 MAT READ A
30 MAT PRINT A;
40 DATA 1,2,3,4,5,6,7,8,9,10,11,12,13,14,15
50 END
RUN
MAT-3

```

```

1      2      3      4      5
6      7      8      9      10
11     12     13     14     15

```

DONE

It should be clear now that MAT READ enters numbers just as we read across the printed page. It reads and enters across until it runs out of space in the row and then reads the next data item into the first location of the next row. This is the method we have been using in all array programs throughout this text.

It was stated earlier that a list is just a special array consisting of a single column or a single row, depending on the computer. Now we will look at arrays of just one column or just one row. See MAT-4 and MAT-5.

MAT-4

```
10 DIM A(5,1)
20 MAT READ A
30 MAT PRINT A
40 DATA 1,2,3,4,5
50 END
```

RUN

MAT-4

1

2

3

4

5

DONE

MAT-5

```
10 DIM A(1,5)
20 MAT READ A
30 MAT PRINT A
40 DATA 1,2,3,4,5
50 END
```

RUN

MAT-5

1	2	3	4	5
---	---	---	---	---

DONE

Some systems may permit you to dimension a list as DIM A[5] and then MAT READ A. If this works, then you can determine whether your system thinks of a list as a row vector or a column vector, by having it MAT PRINT A when A is a list.

The MAT READ statement has an optional redimensioning capability. MAT READ A[R, C] redimensions A to have rows numbered up to R and columns numbered up to C and then reads data into that redimensioned array. See MAT-6.

MAT-6

```
10 DIM A(8,8)
20 MAT READ A(2,5)
30 MAT PRINT A
40 DATA 6,3,4,8,-1,0,17,31,899,10
50 END
```

RUN

MAT-6

6	3	4	8	-1
0	17	31	899	10

DONE

Some systems permit the use of `MAT READ A[R, C]` to perform the initial dimensioning within certain limits (usually up to [10, 10]).

An array of just one column is called a *column vector* by mathematicians. An array of one row is called a *row vector*. Mathematicians use the term *matrix* to describe all arrays. Thus the term `MAT` is used in BASIC.

MAT READ X

Reads data into the array named X according to previously determined dimensions.

MAT READ Y[R, C]

Dimensions or redimensions an array named Y with R rows and C columns and reads data into the array Y. R and C may be explicit integers or variables.

MAT PRINT P; Q, R;

Prints array P with semicolon spacing, then prints array Q with comma spacing, and then prints array R with semicolon spacing.

Even though you use `MAT READ` in a program, you are not required to use `MAT PRINT`. You may often want to use nested loops to print an array as we have been doing up to this section. You will do this if you do not want the blank line between printed rows and if you want to print headings in front of each row or if you only want to print a portion of the array. Note too, that you may use `MAT PRINT` even if you have not used `MAT READ`. This will be the case if we analyze data and enter results into an array as we did in Chap. 5.

PROBLEMS FOR SEC. 12-1

1) Fill an array with the numbers 1, 2, 3, 4, 5, 6, 7, 23, 51, 47, 56, and 234 and fill another array of the same dimensions with the numbers 2, -3, 43, 90, 45, 32, -89, 65, 43, -96, 0, and 1. Fill a third array of the same dimensions with the sums of the numbers in order. The sum array should contain the numbers 3, -1, 46, 94, etc.

2) Use the data of problem 1). Dimension a 3 by 12 array. `MAT READ` the above data into the first two rows and 0's into the third row and then replace the 0's with the sums of the entries in the first two rows column by column.

3) Fill an array with the multiplication table up to 12×12 . `MAT PRINT` the result.

4) Fill a 4 by 3 array with the following numbers: 2, 56, 78, 3, 20, 45, 3, 9, 673, 564, 90, and 234. Have the computer multiply each number in the array by 3 and enter the product to replace the old number. Print the result.

5) Use the data of problem 4), but this time multiply each entry by the product of the row and column number. MAT PRINT the result.

6) Fill a 2 by 5 array with the following numbers: 3, 67, 32, 45, 90, 2, 9, 57, -3, and 1. Multiply each entry by -3 if the sum of the row and column numbers is odd and by -1 if the sum of the row and column numbers is even. Print the result.

7) Fill a square array so that the locations along the top left to bottom right diagonal are filled with 1's and all other entries are 0's. MAT PRINT the array.

8) Fill an array with all 1's and print it.

9) Have the computer read the following array:

1 6 11

2 7 12

3 8 13

4 9 14

5 10 15

and have it create the new array:

1 2 3 4 5

6 7 8 9 10

11 12 13 14 15

10) Fill a 2 by 8 array with all 0's and print it.

11) A company has salesmen on the road four days a week. At the end of each week each salesman turns in an expense sheet. Here is a sample expense sheet:

	Mon.	Tue.	Wed.	Thur.
Lodging	\$12.00	\$11.00	\$10.50	\$14.00
Meals	\$ 4.00	\$ 7.50	\$ 6.90	\$ 7.40
Transportation	\$ 2.00	0	0	\$ 3.50
Customer entertainment	0	\$18.00	\$ 4.50	\$ 4.50
Miscellaneous	\$ 2.31	\$ 1.84	\$ 3.15	\$ 1.83

Write a program that will find total expenses for the week, total expenses for each day of the week, and total expenses in each of the five categories listed on the expense sheet.

12-2 SOLVING A PROBLEM

To get from a certain town to another town one must travel over a toll road, through a toll tunnel, and over a toll bridge. At the beginning of the trip there is a sign posted, listing the rates as in Table 12-1.

TABLE 12-1.

	<i>Tolls per Vehicle</i>		
	<i>Road</i>	<i>Tunnel</i>	<i>Bridge</i>
Trucks	\$6.00	\$3.00	\$2.00
Buses	\$5.00	\$3.00	\$2.00
Passenger Cars	\$4.00	\$3.00	\$2.00
Motorcycles	\$3.00	\$2.00	\$1.00

On a particular day there were five caravans which traveled this route. The caravans consisted of different types of vehicles as shown in Table 12-2.

TABLE 12-2.

	<i>Vehicles per Caravan</i>			
	<i>Trucks</i>	<i>Buses</i>	<i>Cars</i>	<i>Cycles</i>
Caravan 1	1	3	4	2
Caravan 2	1	5	3	6
Caravan 3	2	4	2	5
Caravan 4	1	6	3	2
Caravan 5	3	1	0	2

The Road Commission would like to have a report which would include the amount each caravan paid in tolls at each toll booth. The problem will be solved, when we are able to fill in Table 12-3.

TABLE 12-3.

	<i>Tolls Paid</i>		
	<i>Road</i>	<i>Tunnel</i>	<i>Bridge</i>
Caravan 1	A	B	C
Caravan 2	D	E	F
Caravan 3	G	H	I
Caravan 4	J	K	L
Caravan 5	M	N	Ø

Before we actually attempt the problem solution, let us write just the portion of our program that we will use later, which will read the data into two arrays. One array, which we call A, stores the values of Table 12-1, the other

array, which we call B, stores the values of Table 12-2. Then let us print the two arrays with headings so that we may later concentrate on the actual problem solution, having taken care of the mechanics of getting the data into the proper arrays. Taken by itself, the task of getting the data into the two arrays is reasonably straightforward. See program TØLL-1.

TØLL-1

```

20 DIM A(4,3),B(5,4)
40 MAT READ A
60 DATA 6,3,2,5,3,2,4,3,2,3,2,1
80 PRINT "TØLLS PER VEHICLE"
100 PRINT "RØAD TUNL BRIDGE"
120 MAT PRINT A;
140 MAT READ B
160 DATA 1,3,4,2,1,5,3,6,2,4,2,5,1,6,3,2,3,1,0,2
180 PRINT "VEHICLES PER CARAVAN"
200 PRINT "TRUCK BUS CARS MØTØRCYCLES"
220 MAT PRINT B;
240 END
RUN
TØLL-1

```

TØLLS PER VEHICLE
RØAD TUNL BRIDGE

6	3	2
5	3	2
4	3	2
3	2	1

VEHICLES PER CARAVAN
TRUCK BUS CARS MØTØRCYCLES

1	3	4	2
1	5	3	6
2	4	2	5
1	6	3	2
3	1	0	2

DØNE

Writing the program in parts like this will help us isolate any errors that we might encounter while writing the program. We may now strike out lines 80, 100, 120, 180, 200, and 220 as we will not need these values printed again.

Now to tackle the problem itself. We can find out how much Caravan 1 paid at the road toll booth. It had one truck which paid \$6, three buses at \$5 each for \$15, four cars at \$4 each for \$16, and two motorcycles at \$3 each for \$6. Totaling 1×6 , 3×5 , 4×4 , and 2×3 we get \$43. So, \$43 is the value of A in Table 12-3. How much did Caravan 1 pay at the tunnel? It paid 1×3 for the truck, 3×3 for the buses, 4×3 for the cars, and 2×2 for the motorcycles for a total of \$28, which is the value of B in Table 12-3. We

repeat this process at the bridge substituting 2, 2, 2, and 1 for 3, 3, 3, and 2 and sum up $1 \circ 2$, $3 \circ 2$, $4 \circ 2$, and $2 \circ 1$ getting a total of \$18 for the value of C in Table 12-3. Then we would go to Caravan 2 and step through the road tolls, then the tunnel tolls, and finally the bridge tolls. Then on to the next caravan until we have gotten results for all the five caravans. This is just the kind of repetitive process that we use the computer for.

We will find it helpful to think of Table 12-3 as an array with $C[I, J]$ as the values of the entries rather than A, B, . . . , M, N, Ø. Calling that array C we get $C[1, 1] = A$, $C[1, 2] = B$, etc. down to $C[5, 3] = \text{Ø}$.

Note that after we step across row 1 in MAT B and down column 1 in MAT A, the final sum is entered in row 1 and column 1 of MAT C. When we step across row 1 of MAT B and down column 2 of MAT A, the sum is entered in row 1 column 2 of MAT C. You should see that stepping across row R of MAT B and down column C of MAT A results in a sum that is entered in row R, column C of MAT C. Note too, that the row headings of MAT B correspond to the row headings of MAT C and the column headings of MAT A correspond to the column headings of MAT C, and that the row headings of MAT A and the column headings of MAT B coincide. With some experimentation, you should be able to convince yourself that this is a natural consequence of the problem and not mere coincidence for this particular set of data. If you change the number of toll booths, all of the above statements still hold.

Summarizing, we have just tried to establish that we sum up the following products:

$$B[R, X] \circ A[X, C] \quad (12-1)$$

where R is the row number in MAT B, C is the column number in MAT A, and X goes from 1 to the number of columns in MAT B which is the same as the number of rows in MAT A. Having found the sum of all products in Eq. (12-1) for a fixed [R, C] pair, we enter that sum in $C[R, C]$. We do this for all rows of MAT B and all columns of MAT A.

You should run through the calculations by hand with pencil and paper to verify the procedure and to become more familiar with it. We draw a flowchart in Fig. 12-1 and call the program TØLL-2.

PROBLEMS FOR SEC. 12-2

1) Suppose on a particular day there were four caravans. Caravan 1 had one truck, Caravan 2 had one bus, Caravan 3 had one car, and Caravan 4 had one motorcycle. Have the computer print the amounts that each caravan paid at each toll booth.

2) Suppose there were no vehicles on a particular day. What would the Road Commission report look like?

3) Suppose there were three caravans, each having one vehicle of each type. Print the schedule of payments for this situation.

4) On a given day there were four caravans. Caravan 1 had one motorcycle, Caravan 2 had one car, Caravan 3 had one bus, and Caravan 4 had one truck. Have the computer print the schedule of payments.

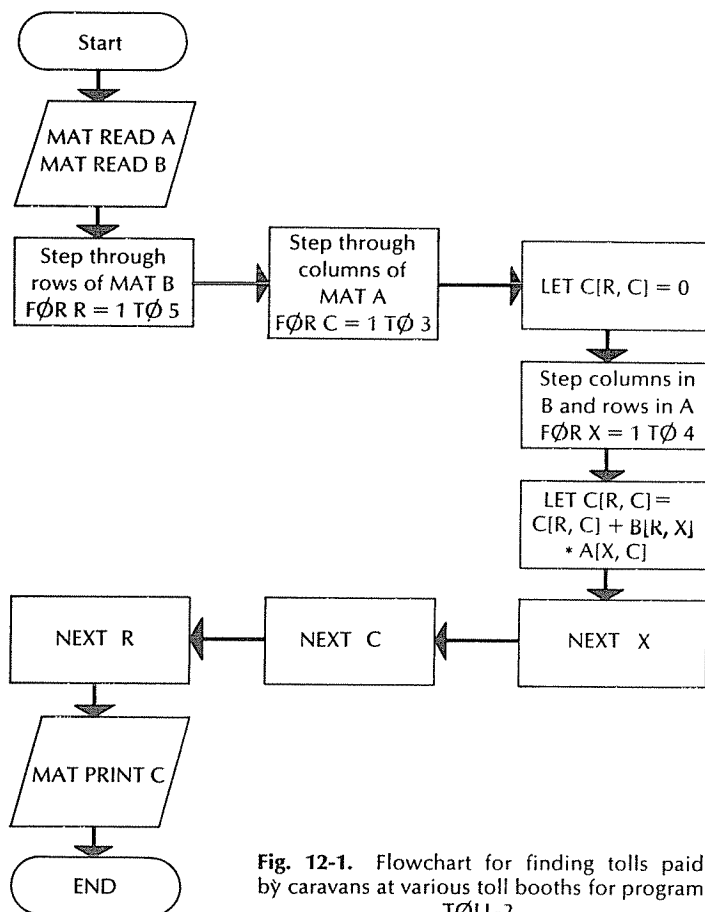


Fig. 12-1. Flowchart for finding tolls paid by caravans at various toll booths for program TOLL-2.

TOLL-2

```

20 DIM A(4,3),B(5,4)
25 DIM C(5,3)
40 MAT READ A
60 DATA 6,3,2,5,3,2,4,3,2,3,2,1
140 MAT READ B
160 DATA 1,3,4,2,1,5,3,6,2,4,2,5,1,6,3,2,3,1,0,2
235 REM WE STEP THROUGH ROWS OF B THE CARAVANS
240 FOR R=1 TO 5
255 REM WE STEP THROUGH COLUMNS OF MAT A
256 REM THE TOLL BOOTH IDENTIFICATION
260 FOR C=1 TO 3
275 REM INITIALIZE C[R,C] HERE
280 LET C[R,C]=0
295 REM X STEPS THROUGH THE ROWS OF A AND THE COLUMNS OF B
296 REM THERE WE FIND 'TRUCKS BUSES CARS MOTORCYCLES'
297 REM IN EACH ARRAY
300 FOR X=1 TO 4
320 LET C[R,C]=C[R,C]+B[R,X]*A[X,C]
335 REM GO TO THE NEXT COLUMN OF B AND THE NEXT ROW OF A
340 NEXT X
  
```

```

355 REM GØ TØ THE NEXT CØLUMN ØF MAT A
360 NEXT C
375 REM GØ TØ THE NEXT RØW ØF MAT B
380 NEXT R
500 PRINT "RØAD","TUNNEL","BRIDGE"
520 MAT PRINT C
999 END
RUN
TØLL-2

```

RØAD	TUNNEL	BRIDGE
43	28	18
61	39	24
55	34	21
54	34	22
29	16	10

DØNE

5) Let

$$A = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \\ 10 & 11 & 12 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} 1 & 2 & 3 & 4 \\ 5 & 6 & 7 & 8 \end{bmatrix}$$

Perform the operations of this section to get MAT C.

6) Suppose we let

$$A = \begin{bmatrix} 1 & 2 & 3 & 4 \\ 5 & 6 & 7 & 8 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} 10 & 11 & 12 & 13 \\ 14 & 15 & 16 & 17 \end{bmatrix}$$

Why could not we perform the set of operations of program TØLL-2?

12-3 OPERATIONS AND SPECIAL MATRICES

While the MAT operations have specialized and rigid definitions in matrix algebra, we will find at times that some of the MAT capabilities will help us in writing programs not deeply involved in a matrix algebra setting. It is the purpose of this section to list the MAT capabilities, but not to develop the matrix algebra to any great extent. For such a treatment, you should see any text in advanced algebra.

Multiplication

The requirements of the Road Commission report in Sec. 12-2 led us to evolve a set of steps that occurs often in both applied and theoretical mathematics. The set of steps carried out there exactly fits the definition of matrix multiplication. Using the array names of Sec. 12-2, we define the product of B and A as the array C, which is written as $C = B \circ A$.

From the discussion in Sec. 12-2, we should see that the dimensioning must conform as

$$B[R, M] \circ A[M, C] = C[R, C]$$

Calling for a product of two nonconforming matrices will generate an error message from the computer. The program statement for multiplication is

```
XXX MAT C = B * A
```

We may now have the computer do everything from lines 240 through 380 with a single statement. Having worked through the operation in considerable detail in Sec. 12-2, you should have little difficulty in having the dimensions correctly provided for. See TØLL-3.

TØLL-3

```
20 DIM A(4,3),B(5,4)
25 DIM C(5,3)
40 MAT READ A
60 DATA 6,3,2,5,3,2,4,3,2,3,2,1
140 MAT READ B
160 DATA 1,3,4,2,1,5,3,6,2,4,2,5,1,6,3,2,3,1,0,2
200 MAT C=B*A
210 PRINT "ROAD","TUNNEL","BRIDGE"
230 MAT PRINT C
999 END
RUN
TØLL-3
```

ROAD	TUNNEL	BRIDGE
43	28	18
61	39	24
55	34	21
54	34	22
29	16	10

DØNE

Addition and Subtraction

Some past problems have asked you to add two arrays. For two arrays of the same dimensions, the sum is defined as an array containing the sums of corresponding entries of the given arrays. In other words, for all I, J pairs, $S[I, J] = A[I, J] + B[I, J]$, where the sum array is S . Matrix addition is accomplished with the program statement

```
XXX MAT S = A + B
or XXX MAT A = A + B
```

may be used if you no longer need $MAT A$.

Subtraction is defined just as you would expect. For $A - B$, the difference must be an array so that for all I, J pairs, $D[I, J] = A[I, J] - B[I, J]$. The program statement is

XXX MAT D = A - B
 or XXX MAT A = A - B

Neither addition nor subtraction is defined for arrays of different dimensions.

Scalar Multiplication

You may multiply each element of an array by some constant or algebraic expression using

XXX MAT Z = (SIN(G)) * X

which multiplies every entry in MAT X by SIN(G) and enters the product in MAT Z.

Equality

A matrix may be created to be identical to an already existing matrix by

XXX MAT P = Q (12-2)

or, in systems which do not permit Eq. (12-2), you should be able to achieve the same result by

XXX MAT P = (1) * Q

Special MAT's

There are three special matrices available with a single assignment statement in BASIC. They are

XXX MAT A = ZER (12-3A)

XXX MAT B = ZER[R, C] (12-3B)

YYY MAT C = CØN (12-4A)

YYY MAT D = CØN[R, C] (12-4B)

ZZZ MAT E = IDN (12-5A)

ZZZ MAT F = IDN[N, N] (12-5B)

Equation (12-3A) sets all entries in MAT A equal to 0 according to previously determined dimensions, while Eq. (12-3B) sets the dimensions of B at [R, C] and fills MAT B with 0's. Equation (12-3B) is often used to change the dimensions of a matrix during the RUN of a program.

Equation (12-4A) sets all entries in MAT C equal to 1 according to previously determined dimensions, while Eq. (12-4B) sets the dimensions of MAT D at [R, C] and fills it with 1's.

Equation (12-5A) requires that MAT E be a square array, and fills the upper left to lower right diagonal with 1's and all other locations with 0's. Equation (12-5B) has the same effect as Eq. (12-5A), but the dimensions are set at [N, N]. The matrix created in this form is called an *identity matrix*. Program MATSP1 is intended to show how these special arrays are established.

MATSP1

```

10 DIM A[2,4],B[2,12],C[10,11]
20 PRINT "MAT A=ZER ** PREVIOUSLY DIMENSIONED AT 2BY4"
30 MAT A=ZER
40 MAT PRINT A
50 PRINT "MAT B=CØN[3,7]"
60 MAT B=CØN[3,7]
70 MAT PRINT B
80 PRINT "MAT C=IDN[4,4]"
90 MAT C=IDN[4,4]
100 MAT PRINT C
110 PRINT "MAT A=CØN[1,6]"
120 MAT A=CØN[1,6]
130 MAT PRINT A
140 END
RUN
MATSP1

```

MAT A=ZER ** PREVIOUSLY DIMENSIONED AT 2BY4

```

0      0      0      0
0      0      0      0

```

MAT B=CØN[3,7]

```

1      1      1      1      1      1      1
1      1      1      1      1      1      1
1      1      1      1      1      1      1

```

MAT C=IDN[4,4]

```

1      0      0      0
0      1      0      0
0      0      1      0
0      0      0      1

```

MAT A=CØN[1,6]

```

1      1      1      1      1      1

```

DONE

SUMMARY

We have introduced the matrix operations—multiplication, addition, subtraction, and scalar multiplication. The special matrices ZER, CØN, and IDN have been specified.

PROBLEMS FOR SEC. 12-3

- 1) Redo program TØTAL using a row vector for the numbers of items and a column vector for the prices. Obtain the total cost with a single MAT statement.
- 2) Have the computer find the product of

$$\begin{bmatrix} 1 & 3 & -2 & -1 \\ 2 & -3 & 1 & -3 \\ -7 & 5 & -1 & 11 \\ 3 & -1 & 1 & -1 \end{bmatrix} \quad \text{and} \quad \begin{bmatrix} -1 \\ 2 \\ -3 \\ 4 \end{bmatrix}$$

If we think of the above as

$$\begin{bmatrix} 1 & 3 & -2 & -1 \\ 2 & -3 & 1 & -3 \\ -7 & 5 & -1 & 11 \\ 3 & -1 & 1 & -1 \end{bmatrix} \quad \text{and} \quad \begin{bmatrix} W \\ X \\ Y \\ Z \end{bmatrix}$$

then we are really finding the values of $W + 3X - 2Y - Z$, $2W - 3X + Y - 3Z$, $-7W + 5X - Y + 11Z$, and $3W - X + Y - Z$.

3) Multiply

$$\begin{bmatrix} 0 & 0 & 1 \\ 0 & 0 & 2 \\ 0 & 0 & 3 \end{bmatrix} \quad \text{by} \quad \begin{bmatrix} 5 & 7 & -5 \\ 4 & 5 & 3 \\ 0 & 0 & 0 \end{bmatrix}$$

and multiply

$$\begin{bmatrix} 0 & 0 & 1 \\ 0 & 0 & 2 \\ 0 & 0 & 3 \end{bmatrix} \quad \text{by} \quad \begin{bmatrix} 5 & 6 & 2 \\ 4 & 1 & 3 \\ 0 & 0 & 0 \end{bmatrix}$$

Any conclusions about the matrix of 0's?

4) Let

$$A = \begin{bmatrix} 3 & 12 \\ 1 & 4 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} -12 & 28 \\ 3 & -7 \end{bmatrix}$$

Find the product $A \circ B$ and the product $B \circ A$. What do you conclude?

5) Let

$$A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix} \quad B = \begin{bmatrix} -1 & -2 \\ 5 & 3 \end{bmatrix} \quad C = \begin{bmatrix} 2 & -11 \\ 25 & 31 \end{bmatrix}$$

Find $[A \circ B] \circ C$ and $A \circ [B \circ C]$.

6) Using A, B, and C from problem 5), find $A \circ [B + C]$ and $A \circ B + A \circ C$.

7) Multiply

$$\begin{bmatrix} 1 & 2 & -1 \\ 2 & -1 & 3 \\ 7 & -2 & 4 \end{bmatrix} \quad \text{by} \quad \begin{bmatrix} .08 & -.24 & .2 \\ .52 & .44 & -.2 \\ .12 & .64 & -.2 \end{bmatrix}$$

8) Let

$$A = \begin{bmatrix} -2 & 1 \\ 1.5 & -.5 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$$

Find $A \circ B$ and $B \circ A$.

✓ 9) Write a program to raise a matrix to a power. Let the power be determined by an item of data.

10) Enter the integers 1 through 12 into a row vector and into a column vector, using MAT READ. (You can avoid typing the data twice by using RESTORE.) Find the 12 by 12 product matrix and print it.

12-4 SOLVING SIMULTANEOUS LINEAR EQUATIONS

You should see that the matrix equation

$$\begin{bmatrix} A_1 & B_1 & C_1 \\ A_2 & B_2 & C_2 \\ A_3 & B_3 & C_3 \end{bmatrix} \circ \begin{bmatrix} X \\ Y \\ Z \end{bmatrix} = \begin{bmatrix} D_1 \\ D_2 \\ D_3 \end{bmatrix} \quad (12-6)$$

can be multiplied out on the left-hand side to obtain

$$\begin{bmatrix} A_1X + B_1Y + C_1Z \\ A_2X + B_2Y + C_2Z \\ A_3X + B_3Y + C_3Z \end{bmatrix} = \begin{bmatrix} D_1 \\ D_2 \\ D_3 \end{bmatrix} \quad (12-7)$$

Defining equality for two matrices as existing if and only if for all I, J pairs the entry of one matrix equals the corresponding entry of the other, or for MAT A and MAT B, $A[I, J] = B[I, J]$, we may say that

$$\begin{aligned} A_1X + B_1Y + C_1Z &= D_1 \\ A_2X + B_2Y + C_2Z &= D_2 \\ A_3X + B_3Y + C_3Z &= D_3 \end{aligned} \quad (12-8)$$

which constitutes a system of three linear equations.

Equations (12-6), (12-7), and (12-8) are simply three different ways of writing the same set of equations. If we can find the values of X, Y, and Z in Eq. (12-6), we will have solved the set of linear equations in Eq. (12-8).

Let us rewrite Eq. (12-6) as

$$C \circ S = K$$

where

$$C = \begin{bmatrix} A_1 & B_1 & C_1 \\ A_2 & B_2 & C_2 \\ A_3 & B_3 & C_3 \end{bmatrix} \quad S = \begin{bmatrix} X \\ Y \\ Z \end{bmatrix} \quad K = \begin{bmatrix} D_1 \\ D_2 \\ D_3 \end{bmatrix}$$

It would be very convenient if we could just divide both sides by C. But it turns out that the division of one matrix by another is not an easily describable process. However, we may instead multiply each side by the multiplicative inverse of C. We write that as C^{-1} . Doing that we get

$$S = C^{-1} \circ K$$

We note here without elaboration, the following facts:

- 1) In order to have an inverse, a matrix must be square.
- 2) Not all matrices have inverses.
- 3) The product of a square matrix and its inverse is the identity matrix.

To see more clearly what the inverse of a matrix is, let us find the inverse of

$$\begin{bmatrix} 5 & 6 \\ 7 & 8 \end{bmatrix}$$

We may call its inverse the matrix with entries A, B, C, and D such that

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} \circ \begin{bmatrix} 5 & 6 \\ 7 & 8 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

Finding the product on the left, we get

$$\begin{bmatrix} 5A + 7B & 6A + 8B \\ 5C + 7D & 6C + 8D \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$$

Two matrices are equal if their corresponding entries are equal. So we get the following four equations:

$$\begin{aligned} 5A + 7B &= 1 & 6A + 8B &= 0 \\ 5C + 7D &= 0 & 6C + 8D &= 1 \end{aligned}$$

Solving these for A, B, C, and D we get $A = -4$, $B = 3$, $C = 3.5$, and $D = -2.5$. So

$$\begin{bmatrix} 5 & 6 \\ 7 & 8 \end{bmatrix}^{-1} = \begin{bmatrix} -4 & 3 \\ 3.5 & -2.5 \end{bmatrix}$$

BASIC provides a statement to find the inverse of a square matrix, if it exists. After we have arranged for proper dimensioning, we may use

XXX MAT X = INV(A)

MATINV

```
10 DIM X(2,2),A(2,2),P(2,2)
20 MAT READ A
30 MAT X=INV(A)
40 PRINT "ORIGINAL MATRIX"
50 MAT PRINT A;
60 PRINT "INVERSE MATRIX"
70 MAT PRINT X;
80 PRINT "THE PRØDUCT IS"
90 MAT P=X*A
100 MAT PRINT P;
110 DATA 5,6,7,8
120 END
RUN
MATINV
```

ORIGINAL MATRIX

5 6

7 8

INVERSE MATRIX

-4. 3.

3.5 -2.5

THE PRØDUCT IS

1 0

0 1

DØNE

and matrix X will be the inverse of matrix A. We may easily verify our calculations for finding the inverse above. See MATINV.

(You are cautioned that the computer may be susceptible to slight errors when using the INV() statement.)

So with the MAT INV(), we should be able to solve sets of simultaneous linear equations such as the following:

$$4W - X + 2Y + 3Z = -3 \quad (12-9A)$$

$$-W + 4X + 2Y = -15 \quad (12-9B)$$

$$W + 2X - Y + 3Z = -3 \quad (12-9C)$$

$$-4W + 3X + 2Y + Z = -17 \quad (12-9D)$$

We let

$$C = \begin{bmatrix} 4 & -1 & 2 & 3 \\ -1 & 4 & 2 & 0 \\ 1 & 2 & -1 & 3 \\ -4 & 3 & 2 & 1 \end{bmatrix}$$

where C is usually referred to as the *coefficient matrix*, and we let

$$K = \begin{bmatrix} -3 \\ -15 \\ -3 \\ -17 \end{bmatrix}$$

Now we can read the data into two matrices C and K, have the computer find the inverse of C, and multiply it by K to get matrix S consisting of the values for W, X, Y, and Z, which satisfy Eq. (12-9). See program SØLVE.

SØLVE

```
10 DIM C[4,4],K[4,1],S[4,1],I[4,4]
20 MAT READ C,K
30 MAT I=INV(C)
40 MAT S=I*K
50 PRINT "SØLUTIONS;"
60 MAT PRINT S
70 DATA 4,-1,2,3,-1,4,2,0,1,2,-1,3,-4,3,2,1,-3,-15,-3,-17
80 END
RUN
SØLVE
```

SØLUTIONS;

1.

-2

-3.

-1

DØNE

The column vector

$$\begin{bmatrix} 1 \\ -2 \\ -3 \\ -1 \end{bmatrix}$$

is to be interpreted as, $W = 1$, $X = -2$, $Y = -3$, and $Z = -1$. We may now substitute these values in Eq. (12-9) to verify that they do in fact constitute the unique solution.

SUMMARY

We have seen that sets of simultaneous linear equations may be solved by considering an equivalent matrix equation $C \circ X = K$, where C is the coefficient matrix, X is a column vector which contains the values of the variables in the original set of linear equations, and K is a column vector containing the constant terms in the original set of linear equations. We may solve for X by finding the inverse of matrix C , so that $X = C^{-1} \circ K$. The inverse may be found with the BASIC statement `MAT I = INV(C)`. For systems of simultaneous linear equations having a unique solution, $MAT C$ will always be square, which is one of the requirements for having an inverse.

PROBLEMS FOR SEC. 12-4

1) Let

$$A = \begin{bmatrix} 4 & -4 & 4 \\ 1 & 1 & 7 \\ -3 & 9 & -8 \end{bmatrix}$$

Find and print A^{-1} , $A \circ A^{-1}$, and $A^{-1} \circ A$.

2) Let

$$B = \begin{bmatrix} -8 & -3 \\ 0 & -1 \end{bmatrix}$$

Find B^{-1} and print it. Verify by hand-computing the inverse of B . Find and print $B \circ B^{-1}$ and $B^{-1} \circ B$.

3) Solve for X and Y :

$$-2X - 5Y = -16$$

$$-X + 4Y = 31$$

4) Solve for X , Y , and Z :

$$2X - 9Y - 5Z = 2$$

$$7X - 6Y + 5Z = -35$$

$$9X - 6Y + 5Z = -39$$

5) Solve for X, Y, and Z:

$$3X + 4Y + Z = 7$$

$$5X - 6Y + 3Z = 8$$

$$3X + 4Y + Z = -3$$

6) Solve for W, X, Y, and Z:

$$6W + 3X + 6Y + 5Z = -12$$

$$-7W + 5X - 7Y - Z = 77$$

$$-3W + X + 3Y + 6Z = 31$$

$$-2W - 4X + 4Y - 7Z = -76$$

7) Solve for W, X, Y, and Z:

$$-3W + 6X - 5Y - Z = -32$$

$$W + 9X - 5Y - 2Z = 9$$

$$W + 6Y + 5Z = 2$$

$$-7W + 4X - Y + 5Z = -86$$

8) Solve for X, Y, and Z:

$$2X + 4Y - 3Z = -11.9$$

$$-9X - 3Y = 58.5$$

$$-9X + 8Y + 5Z = 66.6$$

9) Solve for V, W, X, Y, and Z:

$$7V + 6W - 3X - Y + 9Z = 26.3$$

$$-9V + 2W + 9X + 5Y + Z = 91.1$$

$$-3V + 4W + 5X + 5Z = 62.9$$

$$6V - 8X - 2Y - 6Z = -55.6$$

$$-3V - 9W + 5X + 7Y + 3Z = -25.9$$

10) Let

$$A = \begin{bmatrix} 1 & -2 & 3 \\ 5 & -1 & -2 \\ 0 & 3 & 4 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} 2 & -4 & 0 \\ -3 & 1 & 2 \\ 5 & 2 & -5 \end{bmatrix}$$

Find and print $(A * B)^{-1}$ and $B^{-1} * A^{-1}$.

✓ 11) Write a program that can solve sets of simultaneous linear equations having different numbers of equations. Have an item of data that is the number of equations and redimension all matrices accordingly.

12-5 TRANSPOSE OF A MATRIX

Suppose you have just solved a set of 10 simultaneous linear equations. The 10 values of the 10 unknowns are entered into a column vector that is called X in Sec. 12-4. Calling for MAT PRINT X prints the 10 values down the page with a blank line between every two. This takes up a lot of space. It might

be convenient to enter these same values in a row vector and MAT PRINT that on one line. What we want is to create a new matrix whose row corresponds to the column of the matrix X and whose columns correspond to the rows of matrix X, i.e., an exchange of rows and columns. Of course we could make the exchange element by element or we could do the printing entry by entry, but both are unnecessary. BASIC provides a program statement to perform this set of exchanges. `XXX MAT A = TRN(B)` fills matrix A so that its rows correspond to the columns of B and its columns correspond to the rows of B. This set of exchanges creates a matrix called the *transpose* of B. We write the transpose of B as B^t .

As noted earlier, the transpose will enable us to have more compact printing in some programs. The transpose also introduces some matrix properties of theoretical interest. Some of these properties may be suggested by the exercises.

TRPØS1 is simply a demonstration program that finds and prints the transpose of a 10-element column vector.

TRPØS1

```
8 REM A IS A COLUMN VECTOR AND B IS A ROW VECTOR
10 DIM A(10,1),B(1,10)
20 MAT READ A
30 DATA 1,2,3,4,5,6,7,8,9,10
40 MAT B=TRN(A)
45 PRINT "TRANSPOSE OF COLUMN VECTOR A"
50 MAT PRINT B;
60 END
RUN
TRPØS1
```

```
TRANSPOSE OF COLUMN VECTOR A
1      2      3      4      5      6      7      8      9      10
```

DØNE

The transpose differs from the inverse in that every matrix has a transpose. If MAT A has M rows and N columns, then A^t has N rows and M columns. Let us write a second demonstration program to print a 2 by 4 matrix and its transpose. See TRPØS2.

TRPØS2

```
10 DIM A(2,4),B(4,2)
20 PRINT "2 BY 4 MATRIX"
30 MAT READ A
40 MAT PRINT A;
50 MAT B=TRN(A)
60 PRINT "TRANSPOSE OF THE ABOVE MATRIX"
70 MAT PRINT B;
80 DATA 3,6,1,-5,0,18,999,11
90 END
```

```

RUN
TRPOS2

2 BY 4 MATRIX
3      6      1      -5

0      18     999     11

TRANSPØSE ØF THE ABOVE MATRIX
3      0

6      18

1      999

-5     11

DØNE

```

MAT X = TRN(Y)

Creates a matrix X so that for all I, J pairs, $X[I, J] = Y[J, I]$. Dimensions must be correctly provided for. X is called the transpose of Y.

PROBLEMS FOR SEC. 12-5

1) Let

$$A = \begin{bmatrix} 1 & -2 & 3 \\ 2 & 1 & -4 \\ -3 & 4 & 1 \end{bmatrix}$$

Find and print A^t , $A^t + A$, and $A^t - A$.

2) Let

$$A = \begin{bmatrix} 5 & 3 & 1 \\ 6 & -2 & 9 \\ 3 & 9 & 1 \end{bmatrix}$$

Print A^t , $A + A^t$, $A - A^t$, and $A^t - A$.

3) Let

$$A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$$

Let $B = A^t$ and let $C = A^{-1}$. Print B^{-1} and C^t .

4) Let

$$A = \begin{bmatrix} 2 & -1 & 3 \\ 5 & 0 & 8 \\ -3 & 4 & 2 \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} 6 & 3 & 8 \\ 9 & 5 & 4 \\ 11 & -2 & 0 \end{bmatrix}$$

Print $[A \circ B]^t$, $B^t \circ A^t$, and $A^t \circ B^t$.

CHAPTER 13

Elementary Probability

13-1 INTRODUCTION

It is the purpose of this chapter to introduce some fundamental concepts of probability and to develop program routines for some of these applications.

Taking an intuitive approach to probability, we may think of rolling a die. The term *experiment* is used to describe a particular trial, or in the case of rolling a die, an experiment is the actual rolling of the die. The *outcome* is the number that comes up. There are six possible outcomes for rolling a die. We may say that the probability of the die coming up 2 is one in six or $\frac{1}{6}$, because there is only one 2 and there are six different numbers, each of which is equally likely to come up. We refer to the outcome we are looking for as a success and all others as failure. We define probability so that the probability of success P added to the probability of failure Q is 1, or $P + Q = 1$.

Often our requirements for success permit more than one single outcome, all of which are equally likely to occur. We define probability as the quotient of the number of outcomes that constitute success and the total possible number of outcomes:

$$P = S/T$$

where P is the probability of success, S is the number of outcomes that constitute success, and T is the total number of possible outcomes. All outcomes are equally likely to occur.

So, before we work with probability, we will have to develop ways of counting the numbers of outcomes of various kinds of experiments.

13-2 ENUMERATION

Fundamental Principle of Enumeration

The Fundamental Principle of Enumeration states that, if one choice can occur in A ways and then a second choice can occur in B ways, the total number of ways that the two choices may occur is the product of A and B , or $A * B$.

So, if you are going to buy a car that comes in five models and seven colors, the number of cars you have to choose from is 5×7 , or 35. The Fundamental Principle of Enumeration may be extended to cover any number of choices so that, if in buying the car you also may choose airconditioning and whitewalls and you have four engines from which to choose, the number of cars available is $5 \times 7 \times 2 \times 2 \times 4$, or 560.

Permutations

How many four-letter combinations may be formed using the letters of the word FLAG each used once?

We could approach this problem in one of several ways. We could sit down with pencil and paper and try to write them all, or we might write a program to write them all.

The techniques required for this vary so greatly from system to system that we will not present the program, but only the RUN.

```

RUN
FLAG

FLAG FLGA FALG FAGL FGLA FGAL
LFAG LFGA LAFG LAGF LGFA LGAF
AFLG AFLG ALFG ALGF AGFL AGLF
GFLA GFAL GLFA GLAF GAFL GALF

DONE

```

We can easily see that the number of different combinations is 24. Each of the combinations listed is a permutation of the four letters F, L, A, and G, and each is different from the others because the letters are in a different order. In other words, when we talk about permutations, order matters.

One other approach to solving the original problem will lead us to a more general enumeration technique. We observe that to form a four-letter word using four different letters once, we may use any one of the four letters for the first letter. Now there are only three letters left from which to choose the second letter, two left from which to pick the third letter, and finally we have exactly one letter for the fourth letter of the new word. Using the Fundamental Principle of Enumeration, there are four choices. The first can occur in four ways, the second can occur in three ways, the third in two ways, and the fourth in one way. This makes $4 \times 3 \times 2 \times 1$ or 24, ways that the four choices can occur.

This kind of calculation occurs often in mathematics and so is given a special name. $4 \times 3 \times 2 \times 1$ is called *4 factorial* written as $4!$. In general,

$$N(N-1)(N-2) \cdots (2)(1) = N!$$

where N is a positive integer. Let us write a routine to compute factorials (see program N!).

```

N!

10 PRINT "FIND THE FACTORIAL OF";
20 INPUT N
30 LET F=1
40 FOR X=N TO 1 STEP -1
50 LET F=F*X
60 NEXT X
70 PRINT N;"FACTORIAL =" ; F
80 END
RUN
N!

```

```

FIND THE FACTORIAL OF?4
4 FACTORIAL = 24

```

```

DONE

```

Of course for larger integers, $N!$ becomes very large.

```

RUN
N!

FIND THE FACTORIAL OF?20
20 FACTORIAL = 2.43290E+18

DONE

```

Suppose we want to find the number of three-letter words that can be formed from the letters of the word COMPUTER without duplication. For the first letter we may pick from among eight, for the second we may pick from among seven, and for the third we may pick from among the remaining six letters. This makes $8 \circ 7 \circ 6$, or 336, different words. Since the order is different, these are 336 different permutations. Notice that

$$8 \circ 7 \circ 6 = \frac{8 \circ 7 \circ 6 \circ 5 \circ 4 \circ 3 \circ 2 \circ 1}{5 \circ 4 \circ 3 \circ 2 \circ 1} = \frac{8!}{5!} = \frac{8!}{(8-3)!}$$

We should see that for the number of arrangements of R letters taken from among N different letters with no duplications we get $N!/(N-R)!$. This defines the number of permutations of N things taken R at a time written as

$${}_N P_R = \frac{N!}{(N-R)!} \quad (13-1)$$

Writing the right side of Eq. (13-1) as the quotient of products, we get

$${}_N P_R = \frac{N(N-1)(N-2) \cdots (N-R+1)(N-R)(N-R-1) \cdots (2)(1)}{(N-R)(N-R-1) \cdots (2)(1)}$$

Dividing we get

$${}_N P_R = N(N-1) \cdots (N-R+1)$$

which is ideal for computing with a loop that goes from N to $N-R+1$ STEP -1 . See line 40 of program NPR.

```

NPR
10 READ N,R
20 IF N=0 THEN 100
30 LET P=1
40 FOR X=N TO N-R+1 STEP -1
50 LET P=P*X
60 NEXT X
70 PRINT N;"THINGS";R;"AT A TIME HAVE";P;"PERMUTATIONS"
80 GOTO 10
90 DATA 8,3,4,4,0,0
100 END
RUN
NPR

      8      THINGS 3      AT A TIME HAVE 336 PERMUTATIONS
      4      THINGS 4      AT A TIME HAVE 24  PERMUTATIONS

DONE

```

Combinations

The distinction between combinations and permutations is order. For combinations, order does not matter. We may think of combinations as selections of items while permutations are arrangements. The number of combinations of four letters selected from among four letters is one. The number of combinations of N different things taken R at a time is written ${}_NC_R$. We may find the number of combinations of N things taken R at a time by looking at the number of permutations. Each combination of R things could be arranged in $R!$ ways and that gives us the number of permutations. So

$$({}_NC_R)(R!) = {}_NP_R$$

and solving for ${}_NC_R$ we get

$${}_NC_R = \frac{{}_NP_R}{R!} = \frac{N!}{(R!)(N-R)!}$$

Thus, the number of combinations of three letters selected from eight different letters with no duplications is


$${}_8C_3 = \frac{8!}{3!5!} = 56$$

while the number of permutations is

$${}_8P_3 = 336$$

Combinations pertain to such things as committees and dealing cards where order does not matter.

If we want to know the number of five-member committees that can be selected from among 20 people, we get ${}_{20}C_5$. For the purpose of writing a computer program, we might think of ${}_{20}C_5$ as ${}_{20}P_5/R!$. One approach is to compute ${}_{20}P_5$ and then successively divide by the integers from 5 down to 1. Let us draw a flowchart (Fig. 13-1) and call the program NCR.

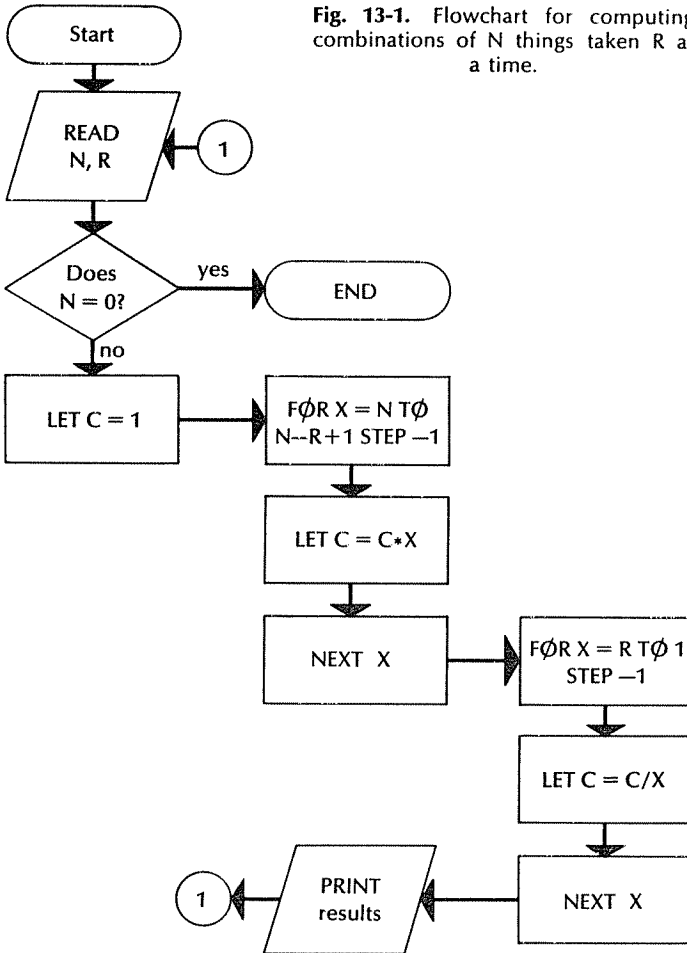

NCR

```

10 READ N,R
20 IF N=0 THEN 150
30 LET C=1
40 REM 30 TO 50 FIND NPR
50 FOR X=N TO N-R+1 STEP -1
60 LET C=C*X
70 NEXT X
80 REM 60 TO 80 DIVIDE BY R!
90 FOR X=R TO 1 STEP -1
100 LET C=C/X
110 NEXT X
120 PRINT N;"THINGS";R;"AT A TIME HAVE";C;"COMBINATIONS"
130 GOTO 10
140 DATA 8,3,4,4,20,5,0,0
150 END
  
```

```
RUN
NCR
```

```
8   THINGS 3   AT A TIME HAVE 56   COMBINATIONS
4   THINGS 4   AT A TIME HAVE 1    COMBINATIONS
20  THINGS 5   AT A TIME HAVE 15504 COMBINATIONS
```

```
DONE
```

Permutations of Things Not All Different

Suppose we want to know the number of arrangements possible for the letters of the word PROGRAM. Since there are two R's and we cannot tell which is which, taking $7!$ counts every distinguishable arrangement twice, because the R's may occupy two positions in $2!$ ways. Therefore, the number of words is $7!/2!$. How many ways can we arrange the letters of the word ABSENTEE? Well, if the E's were distinguishable, we would get $8!$; but that counts the indistinguishable arrangements $3!$ times, because three E's can be arranged in three locations in $3!$ indistinguishable ways. So we get $8!/3!$. The letters of the word SNOWSHOES can be arranged $9!/2!3!$ ways, because the two O's can be arranged in $2!$ ways and the three S's can be arranged in $3!$ ways.

Partitioning

In how many ways can we arrange three X's and five Y's? We get $8!/3!5!$. We might ask this question in the following way: In how many ways can we put eight different things in two groups where one group contains three things and the other contains five and order does not matter?

In how many ways can we arrange three X's, five Y's, and six Z's? We get $14!/3!5!6!$. We could ask the question in the following way: In how many ways can 14 different items be put into three groups of three, five, and six items?

The second version of each of the last two problems are examples of partitioning. In general, if we have $R_1, R_2, \dots, R_n$ items such that $R_1 + R_2 + \dots + R_n = T$, then the number of ways that we can put the T items in n groups of $R_1, R_2, \dots, R_n$ is

$$N = \frac{T!}{R_1!R_2! \cdots R_n!}$$

Note that all the problems treated under permutations and combinations were really special cases of partitioning. The combinations of N things taken R at a time may be thought of as partitioning into two groups of R and $N - R$ items. The problem of arranging SNOWSHOES may be thought of as partitioning into six groups of three items for the S's, two items for the O's, and one item each for the four remaining letters N, W, H, and E. Finally, the permutations of N different items taken R at a time may be thought of as $R + 1$ groups of $N - R$ in the first group and one item each for the other R groups.

SUMMARY

This section has been devoted to introducing the Fundamental Principle of Enumeration and the enumeration of permutations, combinations, and partitionings of objects. In counting permutations order matters. Permutations count such things as arrangements of letters in a word and books lined up on a bookshelf. When counting combinations order does not matter. We use combinations for such things as the number of different committees formed from a group of people and hands dealt in a game of cards.

PROBLEMS FOR SEC. 13-2

- 1) In how many orders can 15 people enter a classroom?
- 2) In how many different ways can 15 keys be put on a circular key ring?
- 3) Cars come in 18 colors, seven models, four engines, and there are 15 options such as whitewalls, outside mirror, radio, etc. How many different cars are available?
- 4) You have 25 different books and two bookshelves, one of which holds exactly 12 books and the other holds exactly 13 books. In how many ways can the books be arranged on the shelves?
- 5) In a class of 30, a six-member committee is to be selected. How many different committees are possible? If there are 15 girls in the class, how many of the committees consist of six girls?
- 6) How many different five-card hands may be dealt from a deck of 52 cards?
- 7) How many different 13-card hands may be dealt from a deck of 52 cards?
- 8) There are five people in a room. In how many ways can they all have different birthdays? Use a 365-day year and ignore Feb. 29.
- 9) In how many ways can 10 people have all different birthdays? Ignore Feb. 29.
- 10) If a state uses three letters followed by three digits for its license plates, how many different license plates can it produce?
- 11) You have five different flags with which to form signals by arranging them all on a flagpole. How many signals can you form?
- 12) You have five different flags with which to form signals by arranging up to five of them on a flagpole. How many signals can you form? Let zero flags constitute a signal.
- 13) You have 10 different flags with which to form signals by arranging up to five of them on a flagpole. How many signals can you form?
- 14) You have 50 friends. You are going to have a party and can only invite 25 people. How many different guest lists could you have?
- 15) In how many ways can 15 people sit in a row of 15 chairs?
- 16) Do problem 15) if two of the people must sit next to each other.
- 17) How many different words can be formed from the letters of the word COMPUTERS if 1) you must use all of the letters and 2) you must leave out one letter?
- 18) A class consists of 30 students of which 17 are girls. In how many ways can we select a committee of four? How many will have two boys and two girls? How many will have one boy and three girls? How many will have four girls? How many will have four boys?
- 19) How many outcomes are possible for rolling two dice followed by drawing three cards from a 52-card deck?

- 20) How many different sets of two five-card hands can be dealt from a 52-card deck?
- 21) How many words can be formed using all the letters in MISSISSIPPI?

13-3 SIMPLE PROBABILITY

We defined probability in Sec. 13-1 as S/T , where S is the number of ways in which an outcome may constitute a success and T is the number of possible outcomes, and all outcomes are equally likely. For flipping a coin, we see that the probability of coming up heads is $1/2$ or $.5$. For drawing a card from a 52-card deck, the probability of getting the ace of spades is $1/52$ or about $.0192$.

Suppose you are in a class of 29 students and a committee of four members is to be selected at random. What is the probability that you get on the committee? Well, the total number of committees possible is ${}_{29}C_4$. Now all we have to find is how many of those committees count yourself as a member. We can find out by saying in effect, "Let us put you on the committee and pick the other three members from the remaining 28 class members." This means that you will be on ${}_{28}C_3$ of the committees, and the probability that you get on the committee is ${}_{28}C_3/{}_{29}C_4$. Let us write a program to compute this probability. We can use lines 30 through 110 of program NCR as a subroutine to first find ${}_{28}C_3$ and then find ${}_{29}C_4$. See program CLASS. You can see that your chances are about 14%. You should also see that the probability that you do not get on the committee is about $1 - .14$ or $.86$.

CLASS

```

10 READ N,R
20 GOSUB 500
30 LET C1=C
32 REM C1 STORES THE NUMBER OF COMMITTEES OF WHICH
33 REM YOU ARE A MEMBER
40 READ N,R
50 GOSUB 500
60 LET P=C1/C
70 PRINT "THE PROBABILITY THAT YOU GET ON A 4 MEMBER"
75 PRINT "COMMITTEE FROM A CLASS OF 29 IS":P
80 STOP
490 REM FIND COMBINATIONS OF N THINGS TAKEN R AT A TIME
500 LET C=1
510 FOR X=N TO N-R+1 STEP -1
520 LET C=C*X
530 NEXT X
540 FOR Y=R TO 1 STEP -1
550 LET C=C/Y
560 NEXT Y
570 RETURN
600 DATA 28,3
610 DATA 29,4
??? END
RUN
CLASS

```

THE PROBABILITY THAT YOU GET ON A 4 MEMBER
COMMITTEE FROM A CLASS OF 29 IS .137931

DONE

Suppose we roll a die. The probability that a 3 comes up is one in six or $1/6$. Now roll the die again. Again, the probability of a 3 is $1/6$. We can see that if we roll the die twice, the probability of both rolls coming up 3 is $(1/6) \cdot (1/6)$, or $1/36$. We define an *event* as a set of outcomes for a particular experiment. If we have two events A and B such that the probability of success for A is P and the probability of success for B is Q, the events A and B are said to be independent if the probability of success for A and B both is $P \cdot Q$. This is exactly the case for rolling a 3 on each of two dice, which enables us to arrive at probabilities without actually enumerating outcomes. Thus we have extended our definition of probability.

For rolling two dice, the events associated with the first die are independent of the events associated with the second die. The same may be said of rolling the same die twice. Flipping two coins are independent. Drawing a card from a deck is independent of rolling a die. So, the probability of getting a 1 and an ace upon rolling a die and drawing a card is $(1/6) \cdot (4/52)$, or $(1/78)$.

Let us look at a problem often referred to as the "birthday problem." Suppose you are in a room with 29 other people. What is the probability that at least two people have the same birthdate? We can say that if the probability of no two people having the same birthdate is P, then the probability that at least two do have the same birthdate is $1 - P$. The birthdates for two people are independent events, so we may multiply individual probabilities. Picking any person first, we say that his probability of having a different birthdate from those already picked is $365/365$. Picking a second person, the probability that his birthdate is different from the first person's is $364/365$. For the third person we get $363/365$ as the probability that his birthdate is different from the first two, and for the 30th person we get $336/365$ as the probability that his birthdate is different from each of the first 29 birthdates. So, the probability that all are different is

$$P = \frac{365}{365} \cdot \frac{364}{365} \cdot \dots \cdot \frac{336}{365}$$

and the probability that at least two people have the same birthdate is $1 - P$. We can write a short program to compute $1 - P$. See BIRTH.

The chances are about 71%, which is much higher than many people would

BIRTH

```
10 LET P=1
20 FOR D=365 TO 336 STEP -1
30 LET P=P*D/365
40 NEXT D
50 LET Q=1-P
60 PRINT "THE PROBABILITY OF TWO OR MORE"
70 PRINT "IDENTICAL BIRTHDATES AMONG 30 PEOPLE IS";Q
80 END
RUN
BIRTH
```

```
THE PROBABILITY OF TWO OR MORE
IDENTICAL BIRTHDATES AMONG 30 PEOPLE IS .706316
```

DONE

guess before doing the problem. Note that this is not the probability that someone else in the room has the same birthday that you have. That problem is left as an exercise.

SUMMARY

We have initially defined probability as the quotient of the number of ways to constitute success and the total number of possible outcomes for equally likely outcomes. We see that this can easily be applied to situations of enumeration. Independent events which have individual probabilities P and Q occur together with a probability of $P \cdot Q$. This produces an extended definition of probability which does not always require enumeration, but requires only that we know individual probabilities for successive events.

PROBLEMS FOR SEC. 13-3

- 1) A class of 29 has 16 girls. A committee of five is selected at random. What is the probability that all five committee members are girls?
- 2) Ten people are to sit in a row of 10 chairs. What is the probability that two particular persons sit next to each other?
- 3) What is the probability of being dealt the ace of spades, the three of clubs, the eight of hearts, the seven of diamonds, and the 10 of clubs?
- 4) What is the probability of being dealt the ace, king, queen, jack, and 10 of spades from a 52-card deck?
- 5) What is the probability of the first six flips coming up heads and the last four tails when flipping a coin 10 times?
- 6) What is the probability of getting all heads when flipping a coin 10 times?
- 7) You have a list of 20 true-false questions from which 10 will be selected at random for a test. Of the 20, there are 15 you are guaranteed to get right and five that you are guaranteed to get wrong. What is the probability that you will get exactly eight right?
- 8) An experiment consists of drawing a card from a 52-card deck until the first ace appears. Find the probability of the first ace appearing on the fourth draw.
- 9) For the experiment of problem 8), find the probability of the first ace appearing on draws one through ten.
- 10) An experiment consists of rolling a die until it comes up 2. Find the probability of the first 2 coming up on the fourth roll, on the tenth roll.
- ✓ 11) Refer to the birthday problem. How many people must be in a room to have the probability of at least two identical birthdates be .5?
- 12) You are in a room with 29 other people. What is the probability that one of them has your birthdate?
- ✓ 13) How many people must be in a room for the probability of another person to have your birthdate be .5?

13-4 RANDOM SIMULATION

We may use the random number generator to simulate experiments that occur at random. We can have the computer flip a coin by generating two random digits. We can roll a die by generating six random digits, etc.

FLIP

```

5 LET C=0
10 FOR X=1 TO 50
20 LET F=INT(2*RND(1))
30 IF F=1 THEN 60
40 PRINT "T";
50 GOTO 100
58 REM C COUNTS THE NUMBER OF HEADS
60 LET C=C+1
70 PRINT "H";
100 NEXT X
110 PRINT
120 PRINT "HEADS ";C;"OUT OF 50 FLIPS"
130 END
RUN
FLIP

```

```

HTHTTTHTTHHHHTTTTHHTTTTHHTTTTHHHHTTTHTHTTTTTHTH
HEADS 23 OUT OF 50 FLIPS

```

DONE

Let us begin by having the computer flip a coin 50 times. See program FLIP. We get 23 heads out of 50 flips. One of the intriguing things about flipping a coin many times is that we do not get heads for half of the flips for each experiment. In fact, it is possible to flip a coin 50 times and get no heads or to get all heads. Of course the probability of all heads or no heads is very small compared to the probability of half heads. We will be able to compute those probabilities in the next section. For now we are concentrating on simulation.

In many ways, flipping a coin 50 times is the same as flipping 50 coins once. Let us put program FLIP in a loop to perform the experiment 10 times to see a range of results. See FLIP-1.

We get a range of 17 to 34 heads for this RUN of the program, and it turned out this time that none of the trials came out 25 heads.

One of the nice features of simulation by computer is that we can have the computer perform hundreds or thousands of trials of an experiment that might take days to do with physical apparatus.

FLIP-1

```

2 FOR Y=1 TO 10
5 LET C=0
10 FOR X=1 TO 50
20 LET F=INT(2*RND(1))
30 IF F=1 THEN 60
40 PRINT "T";
50 GOTO 100
58 REM C COUNTS THE NUMBER OF HEADS
60 LET C=C+1
70 PRINT "H";
100 NEXT X
110 PRINT
120 PRINT "HEADS ";C;"OUT OF 50 FLIPS"
125 NEXT Y
130 END

```

```
RUN
FLIP-1
```

```
HTTTTTHTHTHTTTTTTTTTTHHHHHHTTTTTHTHHHTHHHTTHHTT
HEADS 21 OUT OF 50 FLIPS
HTHTHTHTHTHTHTHTHTTTTTTTTTTHHHHTHTHTHHHTHTHTHHH
HEADS 26 OUT OF 50 FLIPS
HTHTTTHTHTHTTTTTTTTTHTHTTTHTHTHTTTHTTTTTTHHHHTHH
HEADS 17 OUT OF 50 FLIPS
TTTTTTTTHTHTHTHTHHHHHTTTTTHTHTTTTTTTTTHTHTHTHTT
HEADS 21 OUT OF 50 FLIPS
TTHTTTTTHTHTHTHTHHHHHTTTTTHTHHHTTTTTHTHHHTHTHTHTT
HEADS 24 OUT OF 50 FLIPS
HTHTHHHHHHHTTTTTTTHTTHHHHHHTTTHTTTTHTHTHTHTHTHH
HEADS 26 OUT OF 50 FLIPS
HTTTTTTTTTHTHTTTHTTHHHHTHTHTTTTHHHHTHTHTHTTTTTT
HEADS 22 OUT OF 50 FLIPS
THTHHHHHTHTTHHHHTTTHTHTHHHHHTHHHTHTHHHHHHHTTTHT
HEADS 34 OUT OF 50 FLIPS
HTHTHTHTHTTTTTTTTHHTTTHTTTHTTHTTHHHHTTTHTHTHTT
HEADS 24 OUT OF 50 FLIPS
THTHTHTHHHTTTHTHTHTHHHTTTTTHTTTTHTHTHTHTHTT
HEADS 26 OUT OF 50 FLIPS
```

```
DONE
```

Let us set up an experiment to roll six dice 1000 times, counting the number of times 1 comes up for each roll of six dice. The possibilities are from zero to six. Then let us count the number of times each of those seven numbers occurs. We can keep track of all seven totals in a 1 by 7 row vector. We will count the number of times no 1's come up in column 1 and the number of times one 1 comes up in column 2, etc. See the flowchart in Fig. 13-2 and program ROLL.

```
ROLL
```

```
5 REM THE MAT INSTRUCTIONS ARE CONVENIENT HERE
10 DIM L(1,7)
20 MAT L=ZER
38 REM THE COMPUTER DOES 50 THROUGH 110 1000 TIMES
40 FOR X=1 TO 1000
50 LET C=0
55 REM C IS GOING TO COUNT 1'S
58 REM LINES 60 THROUGH 100 ROLL 6 DICE AND COUNT 1'S
60 FOR R=1 TO 6
70 LET U=INT(6*RND(1)+1)
80 IF U>1 THEN 100
90 LET C=C+1
100 NEXT R
110 LET L(1,C+1)=L(1,C+1)+1
120 NEXT X
130 PRINT "NONE ONE TWO THREE FOUR FIVE SIX"
140 MAT PRINT L;
150 END
RUN
ROLL
```

NONE	ONE	TWO	THREE	FOUR	FIVE	SIX
343	410	193	44	9	1	0

```
DONE
```

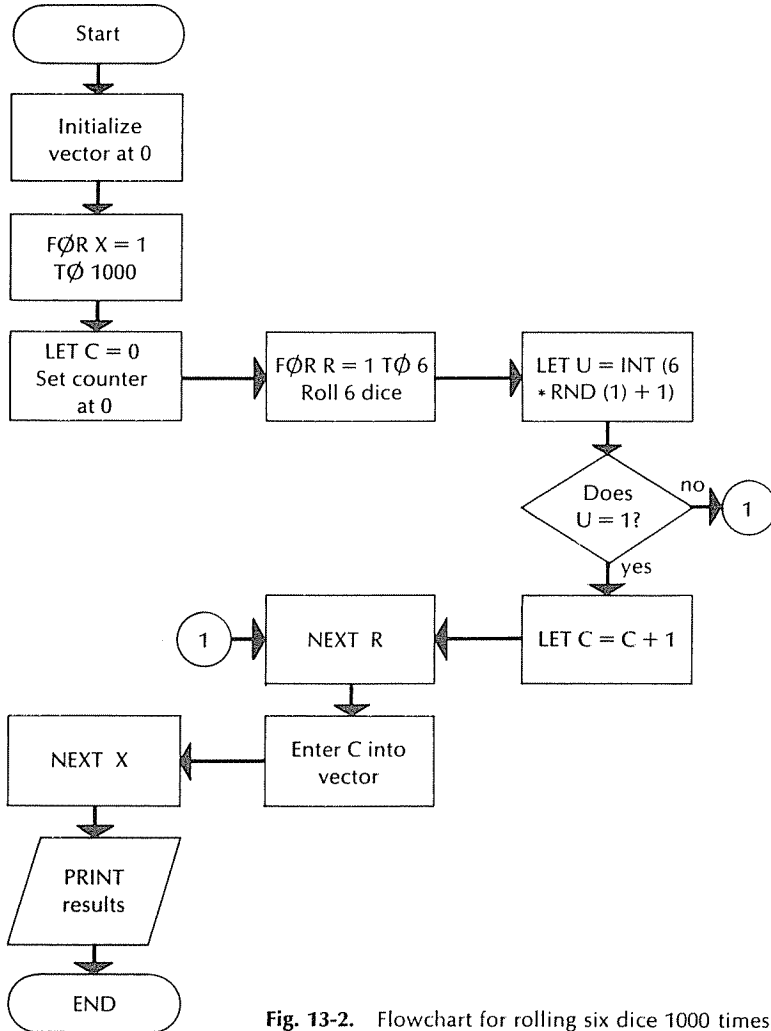


Fig. 13-2. Flowchart for rolling six dice 1000 times.

PROBLEMS FOR SEC. 13-4

1) Have the computer flip six coins 1000 times and print the distribution of outcomes.

2) Sketch a graph of the distribution for problem 1) and the distribution for program ROLL.

3) Write a program to deal five-card hands from a 52-card deck. Be sure not to deal the same card twice.

4) A company manufactures light bulbs and can openers. For light bulbs it is known that 1 in 20 is defective and for can openers 1 in 25 is defective. Write a program to select at random one light bulb and one can opener 1000 times. Total each of the following: the number of times neither was defective, the number of

times both were defective, the number of times the light bulb was defective, and the number of times the can opener was defective.

5) A regular tetrahedron has four equilateral triangles as faces. Let an experiment consist of numbering one face 1 and the remaining faces 2, and tossing the tetrahedron into the air to determine which number faces down. Write a program to toss the tetrahedron 500 times and count the number of times the 1 faces down.

6) Roll a die 500 times. Count the number of times the 1 or the 5 comes up.

7) Roll a die and toss the tetrahedron of problem 5) 1000 times. Count the number of times both come out 1 and count the number of times both come out 2.

8) An experiment consists of rolling a die until a 1 comes up. Write a program to perform the experiment 500 times. Count the number of rolls for each experiment.

9) An experiment consists of flipping a coin until it comes up heads. Write a program to perform the experiment 1500 times and count the number of flips required for each. Print the distribution.

10) Roll 10 dice 500 times. Count the number of 1's that come up for each roll. Print the distribution.

11) Suppose 10% of the population is left handed. Write a program to pick groups of 10 people at random. Count the number of left-handed people. Print the distribution.

12) *Project:* Write a program to make the computer the dealer in a game of 21.

13-5 BINOMIAL TRIALS

Suppose we roll two dice. What is the probability that a 1 comes up exactly once? If we use one red die and one green die, we may more clearly describe the results. There are two ways that that we could get exactly one 1. First, we could have the red die come up 1 and the green die not come up 1. The probability of this is $(1/6) \cdot (5/6)$. Second, we could have the red die not come up 1 and the green die come up 1. The probability of this is $(5/6) \cdot (1/6)$. Now, if we roll the two dice, the probability that we get exactly one 1 is the sum of the above two possibilities, or $(5/6) \cdot (1/6) + (1/6) \cdot (5/6)$. Or we can say that the probability of exactly one 1 is two times the probability of getting a 1 on the green die and not a 1 on the red die which is $2 \cdot (5/6) \cdot (1/6)$.

Now suppose we roll four dice colored red, green, blue, and white. What is the probability that we get exactly two 1's? The probability that the red and the green dice are 1's and the blue and white are not is $(1/6) \cdot (1/6) \cdot (5/6) \cdot (5/6)$. But we might get the 1's on the green and blue with the same probability, or we might get 1's on the red and white dice with the same probability. In fact, there are ${}_4C_2$ ways that we could select two dice from the four to come up with 1's. Each selection has probability of $(1/6) \cdot (1/6) \cdot (5/6) \cdot (5/6)$. So the probability of exactly two 1's up for a roll of four dice is

$$P = {}_4C_2 \cdot (1/6)^2 \cdot (5/6)^2$$

which simplifies to $25/216$.

Suppose we have 10 dice. What is the probability that exactly two dice come up 1 when all 10 are rolled? For a particular selection of two dice, we get $(1/6)^2 \cdot (5/6)^8$ and we can select the two dice in ${}_{10}C_2$ ways. So,

$$P = {}_{10}C_2 \cdot (1/6)^2 \cdot (5/6)^8$$

We can write a short program to find the value of P . Note that in program DICE lines 15 through 40 compute the value of ${}_{10}C_2$.

```
DICE

10 READ R
15 LET C=1
20 FOR X=10 TO 10-R+1 STEP -1
30 LET C=C*X/(10-X+1)
40 NEXT X
50 LET P=C*(1/6)*R*(5/6)*(10-R)
60 PRINT P
65 DATA 2
70 END
RUN
DICE

.29071

DONE
```

Program DICE is for exactly two 1's. What about the other possible numbers of 1's? With just a few changes in program DICE, we can answer that question. Instead of computing for $R=2$ only, we can let R go from 0 to 10 in a FOR-NEXT loop. This can be done by changing only lines 10 and 65 in DICE. See DICE-1.

In DICE-1 we have defined 11 events that cover all possible outcomes in this experiment. There can be no outcomes that do not give from 0 to 10 1's. It is also true that no two of the events have any outcomes in common. Events which do not have any outcomes in common are called *mutually exclusive*

```
DICE-1

5 PRINT "ONES PROBABILITY"
10 FOR R=0 TO 10
15 LET C=1
20 FOR X=10 TO 10-R+1 STEP -1
30 LET C=C*X/(10-X+1)
40 NEXT X
50 LET P=C*(1/6)*R*(5/6)*(10-R)
60 PRINT R,P
65 NEXT R
70 END
RUN
DICE-1

ONES PROBABILITY
0 .161506
1 .323011
2 .29071
3 .155045
4 5.42659E-02
5 1.30238E-02
6 2.17063E-03
7 2.48072E-04
8 1.86054E-05
9 8.26908E-07
10 1.65382E-08

DONE
```

events. If we have a set of mutually exclusive events that also cover all possible outcomes, then the sum of the individual probabilities must total 1. We can verify that the sum of the probabilities in DICE-1 is in fact 1. Of course one way to do that would be to rewrite the program to total the probabilities in DICE-1.

Suppose we know that 10% of a certain population is left handed. If we select 100 people at random, what is the probability that exactly 10 of them will be left handed? The probability that a particular set of 10 people will be left handed will be $(1/10)^{10} \cdot (9/10)^{90}$ and from 100 people there are ${}_{100}C_{10}$ ways that 10 of them can be left handed. So the probability is

$$P = {}_{100}C_{10} \cdot (1/10)^{10} \cdot (9/10)^{90}$$

This too, can be done with a short program. See LEFT.

LEFT

```
10 LET C=1
20 FOR X=100 TO 100-10+1 STEP -1
30 LET C=C*X/(100-X+1)
40 NEXT X
50 LET P=C*(.1)^10*(.9)^90
60 PRINT P
70 END
RUN
LEFT
```

.131865

DONE

In general, we should see that if an outcome has probability P of success and Q of failure and we perform an experiment consisting of N trials, the probability of exactly R successes is

$$P = {}_N C_R \cdot P^R \cdot Q^{N-R}$$

Experiments that behave in this way are called *binomial experiments* because the values of ${}_N C_R \cdot P^R \cdot Q^{N-R}$ are the terms of the expansion of the binomial $(P + Q)$ raised to the N th power.

Binomial Theorem

Looking at $(P + Q)^N$, we should be able to see the general term in the product. $(P + Q)^N$ means, write $(P + Q)$ as a factor N times. So

$$(P + Q)^N = (P + Q)(P + Q)(P + Q) \cdots (P + Q)$$

When we multiply this out, we are actually taking one term from each factor in such a way that we can sum up all possible products of combinations of N factors one from each $(P + Q)$ factor. How many factors are there in the product? There is one term that takes P as a factor N times. There is one term that takes P as a factor $N - 1$ times and Q as a factor once. There is also a

term that takes P as a factor $N - 2$ times and Q as a factor twice, etc., down to the term that takes Q as a factor N times. That makes $N + 1$ terms. Now, for a particular term, say P^3Q^{N-3} , we want three P 's and N minus three Q 's. We can select three P 's from among N terms in ${}_NC_3$ ways and so the value of this term is ${}_NC_3 \cdot P^3Q^{N-3}$. For the R th term we get ${}_NC_R \cdot P^RQ^{N-R}$, which is exactly what we get for a probability of R successes in N trials where the probability of success on a single trial is P and the probability of failure on a single trial is Q . So to find $(P + Q)^N$ we simply evaluate ${}_NC_R \cdot P^RQ^{N-R}$ for all values of R from 0 to N .

Taking a look at the probability of any binomial experiment, we see that since $P + Q = 1$ and the sum of all ${}_NC_R \cdot P^RQ^{N-R}$ terms is $(P + Q)^N$, we get

$$\text{if } P + Q = 1 \quad \text{then} \quad (P + Q)^N = 1$$

which can be verified by summing up the probabilities in program DICE-1.

Finally, if we look at $(X + Y)^N$ for X and Y both equal to 1, we get the general term in the expansion to be ${}_NC_R 1^R 1^{N-R}$, which is the same as ${}_NC_R$, so that the numerical coefficients of any binomial expansion are simply the corresponding values of ${}_NC_R$. Since the values of X and Y are both 1, we are really finding the value of 2^N if we sum up all of the coefficients. Let us write a program to print the coefficients for values of N from 0 to 11. See program PASCAL.

You may recognize these numbers as Pascal's Triangle which has many interesting properties. Problem 9) in Sec. 11-1 and problem 7) in Sec. 5-3 should also have given the results of program PASCAL.

PASCAL

```
10  FOR N=0 TO 11
20  FOR R=0 TO N
30  LET C=1
40  FOR X=N TO N-R+1 STEP -1
50  LET C=C*X/(N-X+1)
60  NEXT X
70  PRINT C;
80  NEXT R
90  PRINT
100 NEXT N
110 END
RUN
PASCAL
```

1												
1	1											
1	2	1										
1	3	3	1									
1	4	6	4	1								
1	5	10	10	5	1							
1	6	15	20	15	6	1						
1	7	21	35	35	21	7	1					
1	8	28	56	70	56	28	8	1				
1	9	36	84	126	126	84	36	9	1			
1	10	45	120	210	252	210	120	45	10	1		
1	11	55	165	330	462	462	330	165	55	11	1	

DONE

PROBLEMS FOR SEC. 13-5

- 1) Modify PASCAL to sum up the coefficients. Print the values of R and the sum of the coefficients. Do not print the coefficients.
- 2) Modify DICE-1 to sum up the individual probabilities. Have the loop go from 10 to 0.
- 3) It is known that 1% of the population has a certain type of blood. In a class of 25 persons, what is the probability that exactly two people have this blood type?
- 4) A company makes bolts. It is known that 1 in 1000 is defective. You buy a box of 100 bolts. What is the probability of getting exactly one defective bolt?
- 5) For the company in problem 4), what is the probability of getting 10 defective bolts.
- 6) For the company in problem 4), what is the probability of getting at least one defective bolt.
- 7) For the company in problem 4), what is the probability of getting less than five defective bolts.
- 8) Find the probabilities of getting zero through six 1's when rolling six dice. Compare your results with the random simulation in program RØLL.
- 9) What is the probability of getting zero through 10 heads when flipping 10 coins.
- 10) What is the probability of getting more heads than tails when flipping 10 coins.
- 11) A test consists of 25 true-false questions. You know that your probability of guessing right on any given question is 75%. Find the probability of getting 76% on the test, if you guess on all questions. Find your probability of getting 76% or better.
- ✓ 12) An experiment consists of flipping a coin until it comes up heads. Find the probability of success for 1 to 10 flips.
- ✓ 13) An experiment consists of rolling a die until it comes up 1. Find the probability of success for 1 to 10 flips. Find the probability that success will require more than 10 rolls. Find the probability that success will require more than 20 rolls.

APPENDIX A

Storing Programs on Paper Tape

A-1 INTRODUCTION

Once you have written your program, you would like to have the computer execute it. In order to execute a program it must be typed into the computer. Ideally, we should all be expert typists, but many of us are not. So, many time-share terminals provide for punching programs on paper tape when the terminal is not connected to the computer. Then the high-speed tape reader may be used for reading the program in on-line. Even so, the considerate student will do his utmost to improve his typing speed so as not to tie up the terminal when others would like to be typing. One suggestion is to type all programs in advance before sitting in front of the terminal to punch tape. You will benefit in two ways: by getting practice in typing and by being able to read the program easily.

A-2 PUNCHING PAPER TAPE OFF-LINE

Programs may be stored on a narrow strip of paper tape by punching rows of holes in a code. Each row represents a character, space, line feed, carriage return, or other nonprinting character.

There are so many variations from one time-share company to the next, that we cannot list them all here. But we can outline the general procedure. First the terminal must be switched to *local*. Then the tape punch apparatus must be turned on. Now you want some blank leading tape so that the tape reader will be able to read the first character of your program. Some terminals generate the blank leader by depressing the HERE IS key. On others, you may have to depress the REPT and RUBOUT keys simultaneously until sufficient tape shows, or try depressing CTRL, SHIFT, REPT, and P all at once.

Now you may type your program. As you type, holes will be punched, which the tape reader will interpret when you feed the finished tape back. Be sure to begin each line with a line number and touch the RETURN and

LINE FEED keys at the end of each line. (There may be a special key for RETURN.)

If you make a typing error, you may correct it in one of several ways. If it is the previous character or within a few characters, depress the backspace button on the tape punch apparatus once for each character you wish to erase. Then touch the RUBOUT key once for each backspace. The RUBOUT key punches out all holes in the row and will be ignored by the computer and will not print. Alternatively, you may depress the SHIFT key and the Ø key once for each character you wish to erase. A backwards arrow will be printed for each correction. Spaces do count as characters for this purpose. If the entire line is a lost cause, simply RETURN, LINE FEED, and begin typing from the beginning including the line number. After you have finished typing, touch RETURN and LINE FEED. Then generate blank tape as you did before typing your program. The idea is to get some paper that is not filled with holes so that you may write some kind of identification on the tape. As soon as you have your second tape, the need for this will become obvious. After tape preparation is completed, tear it off and roll it up. It is suggested that you not roll it less than about 2 in. in diameter, as the tape will take on a permanent curl and that may cause trouble in the reader later.

A-3 READING PAPER TAPE

With the terminal on-line and the previous program erased, you are ready to enter your program into the computer via the tape reader. Again computers vary, but most require a system command, and for some the command is TAPE followed by turning the tape reader on. After the tape is read in, remove your tape from the reader and roll it up again. If the computer requires a system command to enter tape mode, then a second command will be required to remove it from that mode. The command KEY removes the computer from tape mode and prepares it for instructions from the keyboard. The command RUN usually will serve the same purpose.

At this time the computer takes your entire program and compiles it. To compile a program means to put all instructions in order and convert it to a form that the computer uses to actually perform the instructions. In order to run, all statements must be legal BASIC statements and the entire program must fit certain requirements that vary depending on the computer.

At this point, you should read all of Appendix B and then return and finish this appendix.

A-4 GETTING THE COMPUTER TO PUNCH PAPER TAPE

Having read Appendix B, you can see that after you have read in a program on tape, you may make many changes or additions. After you have made all of the necessary changes or after it becomes clear that you cannot make all of the necessary corrections in a reasonable length of time at the keyboard, you may want a new tape of the program in its latest form. Here again, time-

share systems will vary, but you will have a way of getting the computer to punch your program. Some will automatically provide blank leading and trailing tape, others will require you to use the method you used when you typed off-line. Two of the system commands in use are PUNCH and LIST-NØ-HEADER.

Now you have two tapes for the same program. Most likely you will want to throw the old one away. Be sure to write some identification on the new tape.

APPENDIX B

Error Diagnosis

B-1 INTRODUCTION

From the time you type the last line of your program to the completion of a successful RUN, there are three types of errors that may show up: 1) those errors that prevent a RUN; 2) those errors that allow a RUN to begin but cause it to terminate during execution; and 3) those that permit a complete RUN, but cause the computer to produce an unexpected or incorrect result. The whole process of taking a program that does not work and turning it into one that does is called *debugging*. Let us look at the errors by type.

B-2 ERRORS THAT PREVENT RUN

These are very often simply typing errors:

```
10 LT=ET X=5
20 PRONT X
30 END
RUN
NO STATEMENT TYPE FOUND IN LINE 20
```

The exact wording will vary from computer to computer, but the message is clear. We retype line 20 as in the following:

```
20 PRINT X
RUN

5

DONE
```

Even though BASIC does use English words, you may not get too conversational as in the following:

```

10 READ X AND Y
20 PRINT X,Y
30 DATA 4,5,7,-11
40 GOTO 10
50 END
RUN
CHARACTERS AFTER STATEMENT END IN LINE 10

```

As far as BASIC is concerned, line 10 says READ X. The AND Y is not part of the language and so is rejected. Since there is no way to know just what the characters after X mean, if the first one is not a comma or a single digit, the computer will not take a guess at what you meant. You must say exactly what you mean; the computer is not clairvoyant. So, change line 10 as follows:

```

10 READ X,Y
RUN

      4          5
      7          -11

OUT OF DATA IN LINE 10

```

To multiply X times Y in algebra we write XY.

```

10 LET X=5
20 LET Y=10
30 LET Z=XY
40 PRINT Z
50 END
RUN
CHARACTERS AFTER STATEMENT END IN LINE 30

```

However, even though in algebra XY is understood to mean X times Y, you must be more explicit for the computer, and write $X * Y$.

```

30 LET Z=X*Y
RUN

```

50

DONE

Let us put many errors in one program and see what happens.

```

10 LET X= 5
20 READ Y , Z
30 LER W=Y* Z
40 PRINT X
50 LET A*B=X
60 READ W
70 GOTO 9010
80 LET S=(AX+B)*(CX+D)
90 LET A1
100 GOTO BACK TO 10
110 LET X=3*4+5)

```

```

120 DATA 5, 11, 25, -5
130 PRINT W*2
140 GOTO 60
150 DATA 2, 67, -1,
RUN
NO STATEMENT TYPE FOUND IN LINE 30
MISSING ASSIGNMENT OPERATOR IN LINE 50
MISSING RIGHT PARENTHESIS IN LINE 80
MISSING ASSIGNMENT OPERATOR IN LINE 90
NO STATEMENT TYPE FOUND IN LINE 100
CHARACTERS AFTER STATEMENT END IN LINE 110
MISSING OR ILLEGAL DATA ITEM IN LINE 150

```

Now let us see what we can do to fix the program so it will run. First we would like to see what is left of our program. The system command LIST will do that for us.

```
LIST
```

```

10 LET X=5
20 READ Y,Z
40 PRINT X
60 READ W
70 GOTO 9010
120 DATA 5,11,25,-5
130 PRINT W*2
140 GOTO 60

```

The computer automatically wiped out all of the statements that did not conform to BASIC requirements. So what remains ought to run, right? Wrong! The computer has only eliminated the errors that are self-contained in single statements. These are sometimes called *syntax errors* or *errors of form*. The computer has not yet looked to see if the statements fit together into a set of executable statements. To achieve that we type RUN again:

```

RUN
UNDEFINED STATEMENT REFERENCE IN LINE 70

```

We can easily see that the computer cannot GOTO 9010 as there is no line 9010 in the program. We take line 70 out by typing 70 followed by RETURN and try again.

```
70
```

```

RUN
LAST STATEMENT NOT 'END' IN LINE 140
9999 END
RUN

```

```

5
625
25

```

```
OUT OF DATA IN LINE 60
```

Now we have gotten something printed, but the program is all over the place. We can assemble it again with the LIST command or we may use a new command first. We can get nice numbering by the command RENUMBER. Some computers use EDIT RESEQUENCE. We RENUMBER here and LIST the program in its present form.

```
RENUMBER
LIST
```

```
10 LET X=5
20 READ Y,Z
30 PRINT X
40 READ W
50 DATA 5,11,25,-5
60 PRINT W*2
70 GOTO 40
80 END
RUN
```

```
5
625
25
```

```
OUT OF DATA IN LINE 40
```

There is no substitute for experience.

B-3 ERRORS THAT TERMINATE A RUN

The possible errors in this category become more and more plentiful as you use more and more advanced capabilities. However, the error messages are rather explicit and so the most fundamental examples should serve to demonstrate how termination errors operate. Probably the most common error for beginning programmers is that the data is either missing or not matched correctly for the READ variables.

```
10 PRINT "THE RUN HAS BEGUN"
20 LET A=2
30 READ B,C,D
40 PRINT B*C+A
50 PRINT "D =",D
60 PRINT "WE GOT TO LINE 60 AT LEAST"
70 READ X
80 PRINT X
90 DATA 3,17,11
100 END
RUN
```

```
THE RUN HAS BEGUN
867
D = 11
WE GOT TO LINE 60 AT LEAST

OUT OF DATA IN LINE 70
```

Not all computers will print the out of data message, but they will terminate after the last item of data is read if the program sends it back to READ again.

You might instruct the computer to perform an illegal operation as follows:

```
10 PRINT "A","B","A-B","A*B"
20 READ A,B
30 PRINT A,B,A-B,A*B
40 GOTO 20
50 DATA 1,2,5,3,3.41,2,1.23,4,0,0,4.03,5
60 END
RUN
```

A	B	A-B	A*B
1	2	-1	1
5	3	2	125
3.41	2	1.41	11.6281
1.23	4	-2.77	2.28887
0	0	0	

ZERO TO ZERO POWER IN LINE 30

Zero to the zero power is not defined. So the computer notifies you that it has come to this undefined condition and halts execution awaiting your program change. There are many more errors that will halt execution, but these examples should demonstrate the principle involved.

B-4 ERRORS THAT CAUSE UNEXPECTED OR INCORRECT RESULTS

These are the most difficult errors to find. Suppose you write a program and the computer prints nothing, but notifies you that it has run the program in the usual manner.

```
15 LET X=5
25 LET Y=10
30 LET Z=X*2
40 LET W=Y*2
70 END
RUN
```

DONE

We got three blank lines and that is not what we wrote the program to do. It is reasonably obvious that we forgot to put in any PRINT statements.

```
50 PRINT X;Y;Z;W
10 PRINT "X      Y      X*2    Y*2"
RUN
```

X	Y	X*2	Y*2
5	10	25	100

DONE

If you think that you have the PRINT statements and do not get any printed results, look for a GØTØ that causes the computer to bypass the PRINT statements.

The ways in which programs can give incorrect results are unlimited. And to make matters worse, the computer has no way of determining that the result is correct. This is the responsibility of the programmer. Consider the following program to read pairs of numbers and print their sum and their product and the number of pairs:

```

10 PRINT "A      B      SUM  PROD  "
20 LET C=0
30 READ A,B
40 LET C=C+1
50 PRINT A;B;A+B;A*B;C;"PAIRS SØ FAR"
60 GØTØ 10
70 DATA 10,20,11,9
80 DATA 1,2,-45,18
90 END
RUN

```

A	B	SUM	PROD		
10	20	30	200	1	PAIRS SØ FAR
A	B	SUM	PROD		
11	9	20	99	1	PAIRS SØ FAR
A	B	SUM	PROD		
1	2	3	2	1	PAIRS SØ FAR
A	B	SUM	PROD		
-45	18	-27	-810	1	PAIRS SØ FAR
A	B	SUM	PROD		

ØUT ØF DATA IN LINE 30

We certainly do not need to have the headings printed more than once. So we want to change the GØTØ in line 60 as follows:

```

60 GØTØ20
RUN

```

A	B	SUM	PROD		
10	20	30	200	1	PAIRS SØ FAR
11	9	20	99	1	PAIRS SØ FAR
1	2	3	2	1	PAIRS SØ FAR
-45	18	-27	-810	1	PAIRS SØ FAR

ØUT ØF DATA IN LINE 30

But now we still have to find out why the computer prints 1 for the number of pairs each time. Line 40 is LET C = C + 1. C must be 0 each time the computer comes to line 40. This is because the GØTØ sends the computer to line 20 which is LET C = 0. So we change line 60 again. This time we want the computer to go only to the READ statement in line 30.

```
60 GOTO 30
RUN
```

A	B	SUM	PROD		
10	20	30	200	1	PAIRS SØ FAR
11	9	20	99	2	PAIRS SØ FAR
1	2	3	2	3	PAIRS SØ FAR
-45	18	-27	-810	4	PAIRS SØ FAR

```
OUT ØF DATA IN LINE 30
```

And now the program is as follows:

```
10 PRINT "A      B      SUM  PROD  "
20 LET C=0
30 READ A,B
40 LET C=C+1
50 PRINT A;B;A+B;A*B;C;"PAIRS SØ FAR"
60 GOTO 30
70 DATA 10,20,11,9
80 DATA 1,2,-45,18
90 END
```

SUMMARY

We begin to see some of the types of errors and the way in which they affect the running of our program. There are errors of language or syntax errors. There are errors that prevent execution such as GOTO 870 when there is no line 870 in the program. Some errors do not affect the computer until it tries to evaluate an expression that calls for an undefined condition. And finally we have seen some errors that give incorrect results. As we are making changes in programs we may find the LIST command helpful to see the program in its present form. As we change programs, the line numbers may become very scattered or very close together. The command RENUMBER or EDIT RESEQUENCE makes 10 the first line number and the intervals 10.

APPENDIX C

Special Formatting Functions

C-1 TAB(X)

The TAB(X) function is available on many BASIC systems. The TAB() function numbers the spaces across the terminal carriage and uses this number to designate where to print. XXX PRINT TAB (10); "HELLØ THERE" is an instruction to the computer to skip out to the space whose number is 10 and begin printing there. See program HELLØ.

```
HELLØ

5 PRINT "HELLØ THERE"
10 PRINT TAB(10); "HELLØ THERE"
20 END
RUN
HELLØ

HELLØ THERE
      HELLØ THERE

DØNE
```

Some systems call the leftmost space zero and others call it one. Some systems treat the argument of the TAB() function mod 72, so that TAB(100) and TAB(28) mean the same thing. Others use mod 75, in which case TAB(100) means the same as TAB(25).

There may be several TAB()'s in the same PRINT instruction. The argument of TAB() may be a variable as in program TAB(1).

```
TAB(1)

10 LET X=10
20 PRINT TAB(X);X; TAB(X+10);X+10; TAB(X+25);X+25
30 END
RUN
TAB(1)

      10          20          35

DØNE
```

Notice that TAB() counts from the left margin every time it appears, not from the previous printed character.

We may use the TAB() function to make the formatting a little simpler in program BANK2 in Sec. 4-3. Turn back to that program and look at lines 132, 138, 156, 158, and 500 through 530. All of these lines were required to achieve flexible format. We may eliminate all of these as well as line 490 and replace line 140 with 140 PRINT TAB(X); "\$";FNH(P) and replace line 160 with 160 PRINT TAB(X);"\$";FNH(P1). Now all we need to take care of is a value for X. Let us try 35 the first time through. Anywhere before line 140 we may insert ZZZ LET X = 35 and call for a RUN.

```

530
520
510
500
490
158
156
138
132
140 PRINT TAB(X);"$";FNH(P)
160 PRINT TAB(X);"$";FNH(P1)
135 LET X=35
RUN
BANK2

FOR TEN YEARS
04.5% COMPOUNDED MONTHLY...      $ 88.24
04.75% COMPOUNDED QUARTERLY...    $ 90.29

```

The printed results are aligned nicely. Now let us list the new program in full with the value of X at 31 and call for a final RUN.

```

BANK2

2  DEF FNH(X)=INT(X*100+.5)/100
10  LET P=P1=56.31
20  FOR Y=1 TO 10
22  REM FOR TEN YEARS
30  FOR M=1 TO 12
32  REM COMPOUND MONTHLY AND COMPUTE INTEREST
40  LET I=P*4.5/100/12
50  LET P=P+I
60  NEXT M
62  REM THAT FIGURES THE INTEREST FOR THIS YEAR COMPOUNDED
    MONTHLY
70  FOR Q=1 TO 4
72  REM COMPOUND QUARTERLY
80  LET I1=P*4.75/100/4
90  LET P1=P+I1
100 NEXT Q
102 REM THAT TAKES CARE OF THE QUARTERLY INVESTMENT FOR THIS
    YEAR
108 REM NOW TO COMPUTE THE NEXT YEAR
110 NEXT Y
120 PRINT "FOR TEN YEARS"
130 PRINT "04.5% COMPOUNDED MONTHLY..."
135 LET X=31

```

```

140 PRINT TAB(X);"$";FNH(P)
150 PRINT "04.75% CØMPØUNDED QUARTERLY...";
160 PRINT TAB(X);"$";FNH(P1)
9999 END
RUN
BANK2

FØR TEN YEARS
04.5% CØMPØUNDED MØNTHLY...    $ 88.24
04.75% CØMPØUNDED QUARTERLY... $ 90.29

DØNE

```

C-2 IMAGE STATEMENT

There may be an IMAGE statement available on your system. An IMAGE statement provides the printing pattern for a PRINT statement in yet another statement. For our BANK2 program, we would use the following set of statements:

```


130 PRINT USING 140, FNH(P)
140 :@4.5% CØMPØUNDED MØNTHLY    $ ## . ##
150 PRINT USING 160, FNH(P1)
160 :@4.75% CØMPØUNDED QUARTERLY $ ## . ##

```


to achieve the results of the last RUN above. The IMAGE statement begins with a colon and the number signs specify the locations of the digits in the numerical results. In an IMAGE statement, you may specify the location of the decimal point and the number of digits on either side with the number of number signs. The IMAGE statement may specify printing for several numbers by having several sets of number signs. You may also specify E-format by following the number signs with four exclamation marks (...##!!!!). In our problem above, if we decide to change the location of the printed results, we simply retype lines 140 and 160.

APPENDIX D

Summary of Flowchart Shapes




Used for beginning and ending of program.




Indicates data entered into the computer or results returned by the computer.

READ	MAT READ	READ#
PRINT	MAT PRINT	READ:
INPUT	MAT INPUT	WRITE#
		WRITE:



Indicates that a decision is being made.


IF XXXXXX THEN YYY



Indicates a sequence of program statements not included in the flowchart. May be used for GØSUB statement.



Connector. Indicates transfer from one statement to another other than the next higher numbered statement in the program. N matches another N elsewhere in the same flowchart.



Used for anything not already specified.

NEXT X
LET
RETURN
STØP

Summary of Statements in BASIC

NOTE: Not all statements which appear in this appendix will run on all systems, and the list here does not cover every statement from some systems.

END	It is the highest numbered statement of every BASIC program. It is optional on some systems and required on others.
PRINT	Prints values of variables, calculated values, and literal expressions inside quotes. Spacing is controlled by semicolons or commas.
READ	Enters values stored in DATA statements into variables named in the READ statement. All legal BASIC variables (string and numeric) may be read in a single READ statement by separating them with commas.
DATA	Stores values for READ statements. Items of data must be separated by commas. Some systems require that strings be in quotes.
INPUT	Same as READ except that data is to be typed on the keyboard of the remote terminal.
LET	Assignment statement. The word LET is optional on many systems. Stores the value on the right of an equals sign in the variable named on the left. May be used to assign string variables. Multiple assignment is available on most systems.
GOTO n	Names n as the next line number to be executed by the computer.
IF-THEN n	Tests the truth of an algebraic sentence placed between the IF and the THEN. Sends the computer to line n if the sentence is true. Control passes to the next line of the sentence is false.

REM	Permits the programmer to remark upon the program in the program itself without affecting the program operation. Some systems allow an apostrophe, ' , to serve the same purpose.
FØR X = A TØ B STEP C	Opens a machine loop with first value for X at A, last number B, and increment C. If C is omitted, the step defaults to an increment of 1.
NEXT X	Closes machine loop. Sends the computer to the corresponding FØR statement to increment and test X.
GØSUB n	Sends the computer to a subroutine beginning at line n. Upon executing a RETURN statement, the computer returns to the line immediately following GØSUB n.
RETURN	Closes a subroutine.
DEF FNA(X) =	Program-defined function. The letter pair FN designates that a function is called for. The function name is A and the argument is X. Any letter of the alphabet may be placed where the A is. Some systems permit several variables as arguments.
DIM A(),B\$(). . .	Declares dimensions for one- or two-dimensional numeric arrays or string arrays or both. One number is required in the parentheses for a list, and two numbers separated by a comma are required for a two-dimensional array.
STØP	Execution of STØP statement causes termination of the RUN at that point.
RESTØRE	Restores all data in the program. The next item of data to be read will be the very first data item in the program (not discussed in text).
CHANGE A\$ TØ A	Stores the ASCII code of the characters of the string A\$ in the array A with the length of the string in characters stored in A(0).
CHANGE A TØ A\$	Stores a string in A\$ with length specified in A(0) and characters determined by the ASCII code stored in the array elements of the A list.

MATRIX INSTRUCTIONS

MAT READ A	Enters data into the array named A. Several arrays can be read in the same MAT READ statement by separating the array names with commas.
MAT PRINT A	Prints the array named A with comma spacing. Several arrays may be printed with the same MAT PRINT statement by separating array names with a comma or a semicolon. The delimiter specifies the spacing for the preceding array.

MAT INPUT	Enters data into an array from the keyboard (not discussed in text).
MAT C = A * B	Enters the product of A and B into array C.
MAT A = B + C	Enters the sum of B and C into array A.
MAT A = B - C	Enters the difference of B and C into array A.
MAT A = (K)*B	Multiplies each entry of B by the scalar K and enters the result into A.
MAT A = ZER	Creates the zero matrix (fills each entry of A with zero). ZER may be followed by redimensioning specifications in parentheses.
MAT A = CØN	Fills each element of A with 1. CØN may be followed by redimensioning specifications in parentheses.
MAT E = IDN	Forms the identity matrix E. E must be square. All elements with equal row and column numbers are 1 and all other elements are 0. IDN may be followed by redimensioning specifications in parentheses.
MAT X = INV(A)	Finds the inverse of A (if it exists) and enters it in X.
MAT A = TRN(B)	Fills A with the transpose of B.

FUNCTIONS

SQR(X)	Computes the nonnegative square root of X. X must be nonnegative.
ABS(X)	Computes the absolute value of X.
SGN(X)	Returns the value 1 for X positive, 0 for X equals zero, and -1 for X negative.
INT(X)	Returns integer part of X. For some systems this is the mathematically greatest integer function. For others, the computer simply chops off the digits to the right of the decimal point. (The results are the same for nonnegative numbers.)
RND(X)	Generates a random number. In some systems the set of random numbers accessed is determined by the value of X. Some systems generate the same set of numbers each time the program is run, whereas others provide a different set and still others provide an option. See RND below.
RND	Returns a random number. The numbers will be the same on successive runs of the program if the RANDØMIZE statement is not present in the program and different on successive runs if the RANDØMIZE statement is present.
RANDØMIZE	Causes the random numbers generated in successive runs of the same program to vary.
SIN(X),CØS(X),TAN(X)	Computes the sin, cos, or tan of X, where X must be in radians.

ATN(X)	Computes the arctan of X. ATN(X) is in radians. The program must be written to determine the correct quadrant for the result.
LØG(X)	Computes the logarithm of X using base e.
EXP(X)	Computes the number whose LØG base e is X.
TAB(X)	Moves the printing mechanism to the (X + 1)st position of the carriage unless the printing mechanism is already past that point, in which case there is no effect
LEN(A\$)	Returns the number of characters in the string A\$.
EXT\$(A\$,I,J)	String extract function. Isolates a substring in A\$ from the Ith to the Jth character inclusive.

FILES

Hewlett-Packard Files

FILES	Names files to be used by the present program and makes them available for access. File names are separated by commas.
READ #N,R	Sets the file pointer to the beginning of the Rth record of the Nth file named in the files statement. In addition, when followed by a semicolon and variable list, this statement reads values from the file to the variables.
READ #N;	When followed by a variable list, this statement reads from the file at a point previously established.
MAT READ #	Reads values from a file with the same options allowed for READ #.
PRINT #N,R	Sets the file pointer in the Nth file named in the files statement to the beginning of the Rth record and erases the contents of that record. In addition, when followed by a semicolon and a variable list, this statement causes the contents of the variables to be printed into the file.
PRINT #N;	When followed by a variable list this statement causes the contents of the variables to be printed wherever the file pointer has been previously set.
IF END #N THEN n	When executed, this statement sets a flag. If at any later time an attempt is made to read past the end of data or past the physical end of the file or to print past the physical end of the file, control passes to line n.
TYP(N)	The TYP (N) function takes on values from 1 to 4, depending on the nature of the next information in the file TYP(N) becomes 1 for number, 2 for

string, and 3 for end of file. If the argument is negative, the value 4 will be returned for end of record.

General Electric Files

FILES Names files to be used by the current program and makes them available for access. File names are separated by semicolons.

ASCII Files

READ #N,	Reads data from the Nth file named in the program into the variables of the variable list following the comma.
WRITE #N,	Writes data from the variable list following the comma to the file. The variables in the list may be separated by semicolons or commas to achieve corresponding spacing in the file.
IF MØRE #N	Determines whether or not there is more data in the file.
IF END #N	Determines whether or not the end of the file has been reached.
APPEND #N	Allows additional data to be written to an existing file by setting the file pointer to the end of the Nth file and placing the file in the WRITE mode.
SCRATCH #N	Sets the pointer of the Nth file to the beginning of the file, erases the file, and places it in write mode.
RESTORE #N	Sets the pointer of the Nth file to the beginning of the file and places it in the READ mode.

Binary Sequential Files

Binary sequential files may be processed by all of the above statements by substituting a colon (:) for the pound sign (#). Binary files should be less expensive to work with; however, ASCII files are very convenient due to the fact that they may be listed at the terminal.

Random Access Files

READ :N,	Same as ASCII.
WRITE :N,	Same as ASCII.
IF MØRE :N	Tests true, except when the file pointer is at the physical end of file.
IF END :N	Tests false, except when the file pointer is at the physical end of file.
SCRATCH :N	Places the file pointer at the beginning of the file and fills the file with binary zeros.

RESTORE :N	Places the file pointer at the beginning of the file without altering the contents of the file.
SETW N TØ X	Places the file pointer to the Xth word of file N. To access a random file by record, the formula $W \cdot (R - 1) + 1$ places the pointer at the beginning of the Rth record if there are W words per record.

APPENDIX F

Index of Programs in Text

<i>Program</i>	<i>Description</i>	<i>Page</i>
ADDA,B	Adds complex numbers in (A,B) form	148
ALLZER	Finds nonreal zeros for some fourth-degree polynomials	171-172
ARANG1	Prints list after each exchange in ARANGE	42
ARANG2	Uses GØSUB for printing in ARANG1	44
ARANG3	Orders a list of random integers	65
ARANG5	Orders lists in excess of 10 elements	67
ARANGE	Orders list of 10 numbers from data	40
ARRAY1	Demonstrates filling an array	79
ARRAY2	Prints contents of ARRAY1	80
ARRAY3	Detailed array manipulation	81
ARRAY4	More detailed than ARRAY3	82-83
ASIS	ABS(), SQR(), INT(), and SGN() demonstration	48
AVERAGE	Calculates test average from file SCØRE (GE)	117
AVG	Average test scores	31
AVGCNG	AVG done with nested loops First nested machine loops	32
BANK1	Compound amount on \$56.31 at two rates	56
BANK2	BANK1 with rounding and spacing	60
BASE	Change base-10 numbers to base-2	96
BASE-2	Base with digits printed closely packed	97
BIRTH	Probability of two identical birthdates	205
CHANGE	Demonstrates change statement (GE)	107
CHANGF	Demonstrates EXT\$ function (GE)	107
CLASS	Probability of membership on a committee	204
CLØCK1	Clock arithmetic with time of day	69
CLØCK2	Modifies CLØCK1	69

<i>Program</i>	<i>Description</i>	<i>Page</i>
CMPINT	Finds compound amount of \$2000 after nine years	33
CØMFAC	Finds greatest common factor using the Euclidean algorithm	93
CØMP-1	Finds nonreal zeros for trinomials	170–171
CØNVRT	Converts inches to feet and inches	54
CØURS1	Finds numbers of persons taking five courses	77
CØURS2	CØURS1 with random data	78
DAYS01	Reads days of week into MAT W\$(GE)	106
DEF()	Introduces DEF	58
DEMREM	Demonstrates finding remainder after integer division	53
DESCRT	Uses Decartes' Rule of Signs	174
DICE	Probability of two 1's on 10 dice	211
DICE-1	Probability of 0 to 10 1's on 10 dice	211
DIGIT	Prints base-10 numbers digit by digit	99
DIGIT2	Prints integers using string output (HP)	105
ENTERA	File prints one name to a record (HP)	113
FIRST\$	First string program	102
FLIP	Simulates flipping a coin 50 times	207
FLIP-1	Simulates flipping 50 coins 10 times	207–208
GØSUB	GØSUB demonstration program	43
INTZER	Finds integral zeros of polynomials	161
IZERØ1	INTZER with a subroutine-defined function	164
LADER	Uses SIN() in right triangle	135
LADER1	Gets several values for LADER	136
LADER2	Introduces arctangent function	137
LAWCØS	Given three sides of a triangle	143
LAWSIN	Given two angles and nonincluded side	140
LEFT	Probability of 10% success on 100 binomial trials	212
LIST1	First list demonstration program	44–45
LØØP1	First loop introduction	25
LØØP2	Second loop introduction	25
LØØP3	First machine loop using FØR–NEXT	26
LØØP3+	Uses the loop variable	26
LUPDEM	Demonstrates several loop properties	27
MAMD12	Multiply and add mod 12	70
MAT-1	Preintroduction to matrix instructions	176
MAT-2	First MAT READ and MAT PRINT	177
MAT-3	Shows the order in which MAT READ reads	177
MAT-4	Prints column vector	178
MAT-5	Prints row vector	178
MAT-6	Shows redimensioning of a matrix	178
MATINV	Takes the inverse of a matrix	191
MATSP1	Special matrices in BASIC	188

<i>Program</i>	<i>Description</i>	<i>Page</i>
MLTR,G	Multiplies two complex numbers in polar form	151
MØD12	Mod 12 addition	70
N!	Computes factorial N	199
NCR	Computes combinations of N things R at a time	201-202
NPR	Computes permutations of N things R at a time	200
ØRD\$	Compares strings for order	102
ØORDER\$	Alphabetizes characters of a string (GE)	108
ØORDERA	Alphabetizes names in a file (HP)	114
ØORDERAVG	Arranges student data by test average in a binary file	120
PAIRS	Prints all possible pairs from two sets of four numbers	38
PASCAL	Prints numbers of Pascal's triangle	213
PICK	Selects numbers from a random access binary file	119
PLØT1-PLØT5	PLØT1 through PLØT5 develop a plotting program	127-130
PØLAR	Prints coordinates from polar graphing	145
PRIME1	Finds prime integers from data	49
PRIME2	More efficient than PRIME1	49
PRINT	First HP file program	110
PRINT1	Uses 'IF END' in HP file	111
PRINT2	Prints to a file random access (HP)	112
QUAD1	Finds real roots of $AX^2 + BX + C = 0$	123
QUAD2	Analyzes parabola	125
RAND3+	Random decimal numbers 1. to 11	63
READ	Reads a data file (HP)	111
READ01	Uses 'IF END' in HP file	111
READ02	Reads from a file random access (HP)	113
READA	Reads names from a file (HP)	113
READTEST	Reads file SCØRE (GE)	116
REAL	Finds intervals for real zeros of polynomials	166
REAL1	REAL with input to reduce interval size	166-167
REDUCE	Reduces common fractions	52
RND	Loads a binary file with 18 random numbers (GE)	119
RND(1)	Introduces random number generator	62
RND(2)	Random integers 0 to 9	62
RND(3)	Random integers 1 to 10	63
RØLL	Simulates rolling 6 dice 1000 times	208
RØØTS	Takes roots of complex numbers in polar form	153
RØUND	Uses $\text{INT}(X * 100 + .5)/100$ for first time	57
SCØRE	Listing of ASCII file (GE)	116

<i>Program</i>	<i>Description</i>	<i>Page</i>
SCØRE1	Listing of ASCII file (GE)	118
SEG\$1	Demonstrates string subscripts (HP)	103
SEG\$2	Prints one digit numeric using string output (HP)	104
SØLVE	Solves four equations and four unknowns	192
SRVEY1	More processing of data in SURVEY	88–89
SUM1	Adds integers 1 through 50	17
SUM2	Modifies SUM1	17
SUM3	Modifies SUM2	20
SUM3+	SUM3 using machine loop	29
SURVEY	Uses a 15 by 5 array to analyze a questionnaire	86–87
SYNDIV	Divides a polynomial by $X - R$	158
TCHB	Tabulates four items per family	76
TCHB+	TCHB done with an array	83–84
TØLL-1	Reads and prints data for TØLL-2	182
TØLL-2	Prints schedule of tolls paid	184–185
TØLL-3	TØLL-2 with matrix operation	186
TØTAL	Finds total cost of five different items	21
TØTAL+	TØTAL using machine loop	29
TRAGL	Demonstrates variable loop limit	34
TRI•BI	Multiplies a trinomial by a binomial	156
TRIG1	Prints trig table 0 to 80 degrees	134
TRPØS1	Takes the transpose of a column vector	195
TRPØS2	Takes the transpose of a 2 by 4 matrix	195–196
TV'S	Tabulates survey of TV sets per family	74
WRITEAVG	Loads file SCØRE1 from file SCØRE (GE)	118

APPENDIX G

Answers to Even-Numbered Problems

Answers to Even-Numbered Problems

Each two-page spread should be read from top to bottom as one individual page.

CHAP. 1

Problem No. 2

The answer to this will vary from 286 for computers permitting only single letters of the alphabet, upward. Some systems permit dollar signs and ampersands as variables. Other systems permit several letters of the alphabet, such as ABX, as simple variables.

Problem No. 4

The quote is an instruction to the computer that the printed message is terminated. Here again, systems differ. Some systems permit printing double quotes (") by including them between single quotes ('), such as: 'HE SAID, "HELLO."'

Problem No. 6

```
10 READ A,B
20 PRINT A+B
25 DATA 1,E+06,-.001
30 END
RUN
4
```

1-000000E+06
DONE

Problem No. 8

```
10 PRINT 2/3
20 END
RUN
8
```

-.666667
DONE

Problem No. 16(d)

```
10 LET N=(37.481-2.048)*.4
20 LET D=4.98*3.87*.812
30 PRINT N/D
40 END
RUN
160
```

-9.61374
DONE

CHAP. 2

Problem No. 2

The READ statement calls for two variables. A single zero would have caused the program to terminate, as the variable P would find no data.

Problem No. 4

```
5 REM THE LINES USED TO MODIFY PROG-4M SINCE AHE 75, IS AND 35
10 LET N=5
10 LET N=5
20 LET S=0
30 LET S=S+N
40 IF N=1191 THEN 70
50 LET N=N+2
60 GOTO 30
70 PRINT "THE SUM OF ODD NUMBERS FROM 5 TO 1191 IS",S
75 PRINT "THE NUMBER OF NUMBERS SUMMED IS",T
80 END
RUN
N=4
T=594
SUM OF ODD NUMBERS FROM 5 TO 1191 IS 355212.
THE NUMBER OF NUMBERS SUMMED IS 594
DONE
```

Problem No. 12

```
10 PRINT "INITIAL BALANCE = $14.23"
20 LET B=14.23
30 READ T
35 IF T=0 THEN 110
40 LET B=B-T
50 PRINT B
60 GOTO 30
100 DATA 9,-3.24,-1.98,-3.85,0
110 END
RUN
END
NB-12
```

INITIAL BALANCE = \$14.23
23.23
19.99
18.01
14.16
DONE

Problem No. 14

```
10 LET G=0
20 LET D=1
30 REM 0 KEEPS TRACK OF THE NUMBER OF GIFTS
30 REM 1 KEEPS TRACK OF THE DAY NUMBER
32 REM T TOTALS THE NUMBER OF GIFTS ON A GIVEN DAY
40 LET T=0
50 IF D=1 THEN 60
60 LET G=G+1
70 IF T=0 THEN 80
75 GOTO 50
80 PRINT "DAY",D
90 IF D=12 THEN 40
100 PRINT "TOTAL NUMBER OF GIFTS IS",G
120 END
RUN
NB-14
```

TOTAL NUMBER OF GIFTS IS 364
DONE

Problem No. 10

```
10 READ A,B,C,D,E,F,G,H,I,J
20 PRINT A+B+C+D+E+F+G+H+I+J
30 LET S=0
40 FOR N=1 TO 10
50 LET S=S+N
60 NEXT N
70 PRINT S
80 END
```

10

55

DONE

Problem No. 12

```
10 READ A,B,C,D
20 PRINT A*B,C*A+B,D*B+C
30 LET S=0
40 FOR N=1 TO 10
50 LET S=S+N
60 NEXT N
70 PRINT S
80 END
```

12

```
3 3 10 5
6 13 6
OUT OF DATA IN LINE 10
```

Problem No. 14

```
10 READ M,N,O,P,Q,R,S
20 LET A=M+O+N+S
30 LET B=D+P+Q
40 PRINT "A+B=";A+B
50 PRINT "A*B=";A*B
60 END
```

14

$(1/2) * (5/6) = 1/6 \quad \checkmark$

DONE

Problem No. 16(a)

```
10 LET A=1/2+1/3
20 LET B=1/2+1/4
30 PRINT A*B
40 END
```

16a

10.

DONE

Problem No. 16(b)

```
10 LET A=(2+3)/(5+6)
20 LET B=(3+4)/(2+3)
30 PRINT A*B
40 END
```

16b

1.925

DONE

Problem No. 16(c)

```
10 LET A=(1/2+3)/(2+3+1)
20 LET B=((4+3-3)/(5)/(11/4))
30 PRINT A*B
40 END
```

16c

-332613

DONE

Problem No. 6

```
10 LET N=1001
20 LET S=0
30 LET T=1
40 IF S=0 THEN 70
50 LET S=S+N
60 LET N=N-1
70 GOTO 30
80 PRINT "THE SUM OF THE NUMBERS IS";S
90 PRINT "THE NUMBER OF NUMBERS IS";T
100 END
```

NO.6

THE SUM OF THE NUMBERS IS 170266.
THE NUMBER OF NUMBERS IS 111

DONE

Problem No. 8

```
10 LET J=1
20 PRINT 11/1
30 IF J=2 THEN 50
40 GOTO 20
50 END
```

NO.8

```
1 1
2 .333333
3 .25
4 .2
5 .16667
6 .142857
7 .125
8 .111111
```

```
9 9.09091E-02
10 8.33333E-02
11 7.69231E-02
12 7.14286E-02
13 6.66667E-02
14 6.25E-02
15 5.88235E-02
16 5.55556E-02
17 5.2381E-02
18 4.93827E-02
19 4.65116E-02
20 4.375E-02
21 4.10256E-02
22 3.84615E-02
23 3.60317E-02
24 3.37349E-02
25 .04
```

DONE

Problem No. 10

```
5 REM THIS IS NO.10
25 LET T=35.3+2.65*11+.25*1.9+49.35*1.59+.0
30 READ N,P
40 IF N=0 THEN 100
50 LET S=0
60 GOTO 30
100 PRINT "THE NUMBER OF DIFFERENT ITEMS IN THE ORDER IS";T
110 END
```

NO.10

THE NUMBER OF DIFFERENT ITEMS IN THE ORDER IS 5

DONE

Problem No. 16

```
10 LET T=0
15 LET C=0
20 READ S
30 LET P=S/4
40 IF S=0 THEN 70
50 LET T=T+S
60 GOTO 20
70 PRINT "THE AVERAGE TOTAL OF TESTS IS"
80 PRINT "FOR AN AVERAGE OF 17C"
90 DATA 83.9197,100.89,0
200 END
```

NO.16

GEORGE TOOK 5 TESTS
FOR AN AVERAGE OF 92

DONE

CHAP. 3

SEC. 3-1

Problem No. 2

```
10 LET C=0
20 LET T=0
30 FOR N=1001 TO 2213 STEP 11
40 LET C=C+N
50 LET T=T+N
60 NEXT N
70 PRINT "TOTAL 15411"
80 PRINT "THE NUMBER OF NUMBERS IS";T
90 END
```

NO.2

TOTAL IS 178566.
THE NUMBER OF NUMBERS IS 111

DONE

Problem No. 4

```
10 FOR X=1 TO 25
20 PRINT X*1/X
30 NEXT X
40 END
```

NO.4

```
1 1
2 .5
3 .333333
4 .25
5 .2
6 .166667
7 .142857
8 .125
9 .111111
10 .1
11 .09091E-02
12 .07692E-02
13 7.69231E-03
14 7.14286E-02
15 6.66667E-02
16 .04675
17 5.88235E-02
18 5.55556E-02
19 5.2381E-02
20 .054316E-02
21 .047619
22 4.54545E-02
23 4.34783E-02
24 4.16667E-02
25 .04
```

DONE

SEC. 3-1 Cont'd

Problem No. 6

```
10 LET S=0
20 FOR I=1 TO 1000
30 LET S=S+1/I
40 NEXT I
50 PRINT "SUM OF RECIPROCA-5 FRA-1 I TO 1000 IS" S
RUN
END
```

NO.6

SUM OF RECIPROCA-5 FRA-1 I TO 1000 IS 7.48547

DONE

Problem No. 8

```
5 LET P=100
10 FOR Q=1 TO 4
20 LET I=-01*P
30 PRINT I
40 NEXT Q
50 PRINT "AMOUNT AFTER ONE YEAR IS" P
RUN
END
```

NO.8

AMOUNT AFTER ONE YEAR IS 104.06

DONE

Problem No. 10

```
10 READ D
20 IF D=0 THEN 110
30 LET S=0
40 FOR C=0 TO D
50 LET S=S+X
60 NEXT C
70 PRINT "SUM UP TO" D "IS" S
80 PRINT "DATA 12-30-10"
90 DATA 12,30,10
100 DATA 12,30,10
110 END
```

NO.10

SUM UP TO 12 DAYS IS 78

SUM UP TO 30 DAYS IS 465

DONE

SEC. 3-2

Problem No. 2

```
10 FOR I=1 TO 12
20 FOR C=1 TO 12
30 PRINT "C"
40 NEXT C
50 PRINT "I"
60 NEXT I
70 END
```

NO.2

1	2	3	4	5	6	7	8	9	10	11	12
2	4	6	8	10	12	14	16	18	20	22	24
3	4	9	12	15	18	21	24	27	30	33	36
4	4	13	16	20	24	28	32	36	40	44	48
5	10	15	20	25	30	35	40	45	50	55	60
6	17	14	34	30	36	42	48	54	60	66	72
7	14	11	24	32	42	49	56	63	70	77	84
8	16	24	32	40	48	56	64	72	80	88	96

RUN

NO.8

999 IS THE LARGEST AND IS IN POSITION 9

DONE

Problem No. 10

```
5 LET I=0
10 FOR R=1 TO 5
20 LET I=I+1
30 PRINT I
40 NEXT I
50 PRINT R
60 NEXT R
70 END
```

NO.10

1	12	3	4	5	6	7	8	9	10
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50

DONE

Problem No. 12

```
10 PRINT "SQUARE"
20 FOR I=1 TO 9
30 PRINT I
40 NEXT I
50 PRINT
60 FOR L=0 TO 20 STEP 10
70 FOR X=L TO 20 STEP 10
80 PRINT X
90 NEXT X
100 NEXT L
110 PRINT
120 NEXT L
130 END
```

NO.12

SQUARE	0	1	2	3	4	5	6	7	8	9
0	0	1	4	9	16	25	36	49	64	81
10	100	121	144	169	196	225	256	289	324	361
20	400	441	484	529	576	625	676	729	784	841

DONE

SEC. 3-3

Problem No. 2

```
10 FOR I=1 TO 10
20 LET L(I)=I
30 NEXT I
40 PRINT "I"
50 PRINT "L(I)"
60 NEXT I
70 END
```

NO.2

1	1	1
2	3	9
3	6	16
4	10	25
5	15	36
6	21	49
7	28	64
8	36	81
9	45	100

```
220 FOR J=1 TO 4
230 PRINT "J"
240 NEXT J
250 DATA 6,11,15,17,26,33,15,19,27,33,91
260 END
```

NO.8

```
FIRST LIST 6 11 15 17 26 33
SECOND LIST 15 19 27 33 91
NUMBER IN LIST FIRST
15 17 26 33 19 27 91
DONE
```

Problem No. 10

```
10 FOR I=1 TO 10
20 LET L(I)=2*I-1
30 NEXT I
40 FOR J=1 TO 10
50 LET S=0
60 FOR K=1 TO J
70 NEXT K
80 LET S=S+L(K)
90 LET M(J)=S
100 PRINT M(J)
110 NEXT J
120 END
```

NO.10

1 4 9 16 25 36 49 64 81 100

DONE

Problem No. 12

```
10 FOR X=1 TO 6
20 READ F(X)
30 PRINT F(X)
40 NEXT X
50 FOR Y=1 TO 6
60 READ S(Y)
70 PRINT S(Y)
80 NEXT Y
90 FOR I=1 TO 6
100 PRINT A(I)
110 NEXT I
120 DATA 6,1,3,7,2,9,6,2,3,9,7,4
130 END
```

NO.12

6	1	3	7	2	9
8	2	3	9	7	4
48	2	9	63	14	36

DONE

SEC. 3-4

Problem No. 2

```
5 PRINT "ORIGINAL ORDER"
10 FOR X=1 TO 5
20 PRINT X
30 NEXT X
35 PRINT
40 FOR I=1 TO 4
50 FOR J=1 TO 5
60 IF L(I) < L(J) THEN 110
70 LET S=L(I)
80 LET L(I)=L(J)
90 LET L(J)=S
100 NEXT J
110 NEXT I
120 PRINT "LEAST FIRST"
130 PRINT L(I)
140 FOR U=2 TO 5
150 IF L(U)=L(U-1) THEN 180
160 IF L(U)=L(U-1) THEN 180
170 PRINT L(U)
```


SEC. 3-4 Cont'd

Problem No. 6 Cont'd

```
100 LET D=1
110 FOR X=2 TO 7
120 IF R >= R(X) THEN 151
130 LET D=R(X)
140 LET X=X+1
150 NEXT X
160 PRINT "HIGHEST RANGE =";R
170 PRINT "LOWEST RANGE =";D
175 DATA 31,71,146,47,30,17,55,78,55,76,55,75,49,79
180 END
RUN
NO=6
```

AVG LOW = 51.6571
AVG HIGH = 74.7143
HIGHEST RANGE = 30
LOW DATA NUMBER = 1

DONE

Problem No. 8

```
10 LET X=0
20 LET T=0
30 LET M=1
40 READ L(X)
50 IF L(X)=0 THEN 90
60 PRINT L(X)
70 LET T=T+L(X)
80 GOTO 30
90 LET A=T/(X-1)
95 PRINT "AVERAGE ="A
110 LET S=0
120 FOR B=1 TO X-2
130 IF L(B) < L(B+1) THEN 180
140 LET S=L(B)+L(B+1)
150 LET L(B)=L(B+1)
160 LET L(B+1)=S
170 LET S=1
180 IF S=1 THEN 110
190 FOR C=1 TO X-1
200 FOR D=1 TO X-1
210 PRINT C;" "D
220 PRINT C;" "D;S;BES BELOW AVERAGE"
230 GOTO 260
240 NEXT C
250 NEXT D
260 FOR D=X-1 TO 1 STEP -1
270 IF A < L(D) THEN 300
280 PRINT X;"C"TEST SCORES WERE ABOVE AVERAGE"
290 NEXT D
300 NEXT X
310 PRINT "TROUBLE"
320 PRINT "L1=INT((X-1)/2-.5)";IS THE MEDIAN SCORE"
330 LET L1=L(D+1)
382 DATA 0
330 END
RUN
NO=8
```

65	71	82	63	90	58	66	67	68
AVERAGE = 70								
6 SCORES WERE BELOW AVERAGE								
15 SCORES WERE ABOVE AVERAGE								
87 IS THE MEDIAN SCORE								
DONE								

CHAP. 4

SEC. 4-1

Problem No. 2

SEC. 4-3

Problem No. 2

```
10 LET P=5
11 IF P=5 THEN 20
20 FOR Y=1 TO 85
30 FOR M=1 TO 12
40 LET P=M*Y
50 LET P=M*Y/12
60 LET P=M*Y
70 NEXT M
80 NEXT Y
90 PRINT P
100 END
```

Problem No. 8

```
10 READ F, S
20 IF S=0 THEN 999
30 PRINT F;S;"GCF=";Y
40 FOR X=1 TO 1 STEP -1
50 IF S/INT(S/X) THEN 60
60 IF F/X=INT(F/X) THEN 110
70 NEXT X
80 GOTO 1
90 GOTO 10
110 PRINT X
120 GOTO 10
999 END
RUN
NO=8
```

Problem No. 10

```
10 LET F(1)=1
20 LET F(2)=1
30 FOR I=3 TO 10
40 LET F(I)=F(I-1)+F(I-2)
50 NEXT I
60 FOR I=3 TO 9
70 FOR J=1 TO 10
80 LET S=F(I)+F(J)
90 LET S=F(I)
100 GOSUB 1000
110 NEXT J
120 NEXT I
130 FOR Z=1 TO C
140 PRINT L(Z)
150 NEXT Z
160 GOTO 100
170 FOR X=1 TO 1 STEP -1
180 IF S/X=INT(S/X) THEN 1030
190 GOTO 1040
1040 NEXT X
1050 GOTO 1110
1060 FOR Y=1 TO 6
1080 NEXT Y
1090 NEXT Y
1100 LET C=C+1
1100 LET C=X
1120 RETURN
1120 END
RUN
NO=10
```

SEC. 4-3

Problem No. 2

```
10 LET P=5
20 FOR Y=1 TO 85
30 FOR M=1 TO 12
40 LET P=M*Y
50 LET P=M*Y/12
60 LET P=M*Y
70 NEXT M
80 NEXT Y
90 PRINT P
100 END
```

SEC. 3-4 Cont'd

Problem No. 6 Cont'd

```
100 LET D=1
110 FOR X=2 TO 7
120 IF R >= R(X) THEN 151
130 LET D=R(X)
140 LET X=X+1
150 NEXT X
160 PRINT "HIGHEST RANGE =";R
170 PRINT "LOWEST RANGE =";D
175 DATA 31,71,146,47,30,17,55,78,55,76,55,75,49,79
180 END
RUN
NO=6
```

AVG LOW = 51.6571
AVG HIGH = 74.7143
HIGHEST RANGE = 30
LOW DATA NUMBER = 1

DONE

Problem No. 8

```
10 LET X=0
20 LET T=0
30 LET M=1
40 READ L(X)
50 IF L(X)=0 THEN 90
60 PRINT L(X)
70 LET T=T+L(X)
80 GOTO 30
90 LET A=T/(X-1)
95 PRINT "AVERAGE ="A
110 LET S=0
120 FOR B=1 TO X-2
130 IF L(B) < L(B+1) THEN 180
140 LET S=L(B)+L(B+1)
150 LET L(B)=L(B+1)
160 LET L(B+1)=S
170 LET S=1
180 IF S=1 THEN 110
190 FOR C=1 TO X-1
200 FOR D=1 TO X-1
210 PRINT C;" "D
220 PRINT C;" "D;S;BES BELOW AVERAGE"
230 GOTO 260
240 NEXT C
250 NEXT D
260 FOR D=X-1 TO 1 STEP -1
270 IF A < L(D) THEN 300
280 PRINT X;"C"TEST SCORES WERE ABOVE AVERAGE"
290 NEXT D
300 NEXT X
310 PRINT "TROUBLE"
320 PRINT "L1=INT((X-1)/2-.5)";IS THE MEDIAN SCORE"
330 LET L1=L(D+1)
382 DATA 0
330 END
RUN
NO=8
```

65	71	82	63	90	58	66	67	68
AVERAGE = 70								
6 SCORES WERE BELOW AVERAGE								
15 SCORES WERE ABOVE AVERAGE								
87 IS THE MEDIAN SCORE								
DONE								

CHAP. 4

SEC. 4-1

Problem No. 2

SEC. 4-3

Problem No. 2

```
10 LET P=5
11 IF P=5 THEN 20
20 FOR Y=1 TO 85
30 FOR M=1 TO 12
40 LET P=M*Y
50 LET P=M*Y/12
60 LET P=M*Y
70 NEXT M
80 NEXT Y
90 PRINT P
100 END
```

```

10 PRINT
15 READ N THEN 110
17 FOR D=2 TO 500(N)
20 FOR D=2 TO 500(N)
30 IF N/D=INT(N/D) THEN 70
40 NEXT D
50 PRINT "N="N
60 GOTO 10
70 PRINT N/D;"D="N
75 IF D=N THEN 10
80 GOTO 10
85 DATA 1946,1949,1001,10
RUN
END

```

```

973 * 2 = 1946
278 * 7 = 1946
139 * 14 = 1946
1 * 1946 = 1946

```

```

1 * 1949 = 1949
143 * 7 = 1001
91 * 11 = 1001
77 * 13 = 1001
1 * 1001 = 1001

```

DONE

Problem No. 4

```

5 PRINT "NUMBER","ABSOLUTE VALUE"
10 READ A
20 PRINT A
30 IF A<0 THEN 1000
40 GOTO 10
1000 IF A>= 0 THEN 1020
1010 LET A=-A
1020 RETURN A
1030 RETURN A
1040 DATA 11,3,2,0,-17,13,31,2,-11,1
1050 END

```

NO.4

```

NUMBER ABSOLUTE VALUE
11.3 11.3
-17 17
13 13
31.2 31.2
-11.1 11.1

```

OUT OF DATA IN LINE 10

Problem No. 6

```

10 PRINT "N="N
17 IF N=0 THEN 110
20 FOR D=2 TO 500(N)
30 IF N/D=INT(N/D) THEN 70
40 NEXT D
50 PRINT "N="N
51 IF N=0 THEN 60
52 PRINT "1"
70 PRINT N/D;"D="N
71 IF N=0 THEN 75
73 PRINT "N/D="D;"N="N
75 IF D=N THEN 10
80 GOTO 40
85 DATA 711,991,-991,-453,-654,1009,-1009,9001,0
110 END

```

```

40 NEXT P
15 READ N THEN 110
17 FOR D=2 TO 500(N)
20 FOR D=2 TO 500(N)
30 IF Y/P=INT(Y/P) THEN 90
40 NEXT D
50 PRINT "Y="Y;"P="P
100 GOTO 10
110 DATA 3.4,82.48,3.4,36.48
120 DATA 0
130 DATA 0
150 END

```

NO.2

```

5 / 6 = 5 / 6
82 / 48 = 41 / 24
36 / 48 = 3 / 4

```

DONE

Problem No. 4

```

10 PRINT "INCHES","YARDS FEET INCHES"
20 READ I
35 IF I=0 THEN 999
40 LET Y=INT(I/36)
50 LET I=I-36*Y
40 LET F=INT(I/12)
50 LET I=I-12*F
80 PRINT Y;F;I
90 GOTO 20
100 DATA 20,197,150,608,83,10
110 END

```

NO.4

INCHES	YARDS	FEET	INCHES
20	0	1	8
197	5	1	5
150	4	0	6
608	16	8	0
83	2	0	11
31	0	2	7

DONE

Problem No. 6

```

10 READ H,D,Q,N
15 PRINT "DOLLARS","HALF QUARTER Dimes NICKEL PENNIES"
20 READ D
31 IF D=0 THEN 9999
37 LET D=100
38 PRINT D
30 LET H=INT(D/H)
40 LET D=D-H*H
41 LET Q=INT(D/Q)
42 LET D=D-Q*Q
43 LET N=INT(D/N)
44 LET D=D-N*N
70 LET D=INT(D/100)
80 LET D1=D-100*INT(D/100)
90 LET D=D1
100 LET D1=D1-100*INT(D1/100)
110 PRINT H;D1;Q;N;D1
120 DATA 20,85,10,5
130 DATA 1,56,35,1,76
1080 DATA .01,0
9999 END

```

NO.6

DOLLARS	HALF	QUARTER	Dimes	NICKEL	PENNIES
20	0	1	0	0	0
85	0	1	1	0	1
10	3	1	0	0	1
1.76	0	0	0	0	1
.01	0	0	0	0	1

DONE

```

RUN
NO.2
$780.36

```

DONE

Problem No. 4

```

10 LET P=0
20 FOR Y=1 TO 23
30 FOR M=1 TO 12
40 FOR D=1 TO 30
50 FOR D=1 TO 30
60 LET I=P+.045/360
70 LET P=P+I
80 NEXT D
90 NEXT M
100 NEXT Y
110 PRINT "I="I;"INT(P*100+.5)*101"
120 END

```

NO.4

\$ 278.71

DONE

Problem No. 6

```

10 DEF FNHX=INT(100*X+.5)*.01
50 LET P1=P2*P3*99
51 LET P1=P1+.1
40 FOR M=1 TO 12
50 LET P1=P1+.75/100/12
60 NEXT M
70 FOR Q=1 TO 4
80 LET P2=P2*P5/100/4
90 NEXT Q
100 FOR D=1 TO 365
110 LET P3=P3*34.5/100/365
120 NEXT D
130 NEXT Y
140 PRINT "P1="P1;"P2="P2;"P3="P3
150 PRINT "P4="P4;"P5="P5;"P6="P6;"P7="P7
160 LET X=5
170 GOSUB 500
180 PRINT "P1="P1
190 PRINT "P2="P2;"P3="P3;"P4="P4;"P5="P5;"P6="P6;"P7="P7
200 LET X=X+1
210 GOSUB 500
220 PRINT "P1="P1;"P2="P2;"P3="P3;"P4="P4;"P5="P5;"P6="P6;"P7="P7
230 PRINT "P4="P4;"P5="P5;"P6="P6;"P7="P7
240 LET X=X+2
250 GOSUB 500
260 PRINT "P1="P1;"P2="P2;"P3="P3;"P4="P4;"P5="P5;"P6="P6;"P7="P7
270 STOP
500 FOR Z=1 TO X
510 NEXT Z
520 NEXT Y
530 PRINT "X="X
540 RETURN
550 END

```

NO.6

```

****99.00 FOR 15 YEARS***
P4=.75% COMPOUNDED ANNUALLY.. $ 201.59
P5=.5% COMPOUNDED QUARTERLY.. $ 205.61
P4=.5% COMPOUNDED DAILY.. $ 194.43

```

DONE


```

RUN
N8.4
1 0 0 0 0 0 0 0
0 0 0 1 0 0 0 0
0 0 0 0 1 0 0 0
0 0 0 0 0 1 0 0
0 0 0 0 0 0 1 0
0 0 0 0 0 0 0 1
DONE

Problem No. 6
10 DIM M(12,12)
20 FOR R=1 TO 12
30 FOR C=1 TO 12
40 M(R,C)=R+C
50 NEXT C
60 NEXT R
70 FOR R=10 TO 12
80 FOR C=10 TO 12
90 PRINT M(R,C)
100 NEXT C
110 PRINT
120 NEXT R
130 END
RUN
N8.6
10 20 30 40 50 60 70 80 90 100 110 120
11 22 33 44 55 66 77 88 99 110 121 132
12 24 36 48 60 72 84 96 108 120 132 144
DONE

CHAP. 6
SEC. 6-1
Problem No. 2
10 PRINT "MULTIPLY TWO FRACTIONS"
20 PRINT " TO STOP RUN INPUT .01 FOR N1"
30 PRINT "N1,01"
40 INPUT N1
42 IF N1=01 THEN 999
50 PRINT "N2,02"
60 INPUT N2
70 LET N1=N1*N2
75 LET N3=N1
80 LET DDD=D2
90 REM HERE IS THE EUCLIDEAN ALGORITHM
100 LET I=INT(N/D3)
110 LET N=N-I*D3
120 IF N=0 THEN 140
130 LET D=N
140 LET D=N
150 GOTO 100
160 C=INT(100/D3)
170 LET N=PRODUCT I5*N3/D3
180 GOTO 30
999 END
RUN
N8.2
MULTIPLY TWO FRACTIONS
TO STOP RUN INPUT .01 FOR N1
N1,D11,2
M2,D214,3
PRODUCT 15 2 / 3
N1,D1745,72
M2,D2121,8
PRODUCT 15 105 / 64
N1,D17,0.1
DONE

SEC. 6-2
Problem No. 2
5 DIM L(21)
10 READ N
15 LET N=N-1
20 FOR X=1 TO N

```

```

240 PRINT A*M*B=M*PE(A+1,B+1)*MOD 5"
250 NEXT X
260 END
RUN
N8.12
MULTIPLICATION MOD 5
0 0 0 0 0 0
0 1 2 3 4
0 2 4 1 0
0 3 1 4 2
0 4 3 2 1
0 5 4 3 2 1
2 * 4 = 2 MOD 5
2 * 1 = 2 MOD 5
0 * 1 = 0 MOD 5
0 * 2 = 0 MOD 5
4 * 4 = 4 MOD 5
4 * 2 = 3 MOD 5
DONE

SEC. 5-3
Problem No. 2
10 DIM S(14,10)
20 FOR R=1 TO 16
30 REM LINE 30 ENTERS THE ROW NUMBER IN THE FIRST COLUMN
40 LET S(R,1)=R
50 REM LINE 50 SETS THE LAST 9 COLUMNS AT ZERO
60 LET S(R,C)=0
70 NEXT C
78 REM 80 READS THE CATAGORY FOR THE NEXT PERSON IN THE SURVEY
80 READ P
85 REM 90 GUESTS THROUGH THE 15 QUESTIONS
100 FOR Q=1 TO 15
110 READ A
120 LET S(R,Q)=S(R,P)+A
130 NEXT Q
138 REM LINE 140 SENDS THE COMPUTER BACK TO READ ANOTHER LINE OF DATA
140 FOR R=1 TO 15
150 LET S(R,6)=S(R,2)+S(R,3)
160 LET S(R,7)=S(R,4)+S(R,5)
170 LET S(R,8)=S(R,2)+S(R,3)
180 LET S(R,9)=S(R,2)+S(R,4)
195 LET S(R,10)=S(R,6)+S(R,7)
198 LET S(R,11)=S(R,16)+S(R,3)
199 LET S(R,12)=S(R,16)+S(R,3)
199 NEXT R
199 NEXT R
200 PRINT "PRINTING BEGINS HERE"
210 PRINT "NUMBER 21* UNDER 21* UNDER MALE FEMALE FEMALE"
211 PRINT " TOTAL"
220 FOR C=1 TO 15
230 FOR R=1 TO 10
250 PRINT S(R,C)
260 NEXT C
270 NEXT R
280 NEXT R
290 REM *** LINE LINE 300 MAY HELP TO LINEUP THE DATA LINES
299 REM IN TYPING***
300 DATA 4,1,0,1,1,1,0,0,0,1,1,1,1,1,1,1,1
501 DATA 4,1,0,1,1,1,0,0,0,1,1,1,0,1,0,1,1
502 DATA 4,1,0,0,0,0,1,1,0,1,1,0,0,0,0,1,1
503 DATA 3,1,1,1,1,0,0,0,1,0,1,0,0,1,1,0,0
504 DATA 2,1,1,1,1,0,0,0,1,0,1,0,1,1,1,1,0
505 DATA 2,1,1,1,0,0,0,1,0,0,1,0,1,1,1,1,0
506 DATA 5,0,0,1,0,1,0,0,0,1,1,1,0,0,1,1
507 DATA 2,0,0,0,1,1,1,0,1,0,1,0,1,0,0,1
508 DATA 4,1,1,1,1,1,1,0,1,0,0,1,0,1,1,0
509 DATA 4,1,1,1,1,1,1,0,1,0,0,1,0,1,1,0
510 DATA 2,1,1,0,0,1,1,0,1,0,0,0,0,0,1,1,1
511 DATA 1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1
512 DATA 1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1
999 END

```

```

FIRST ARRAY
18 -13 -20 16 -42 28 -1
33 1 -45 -31 -34 23 -7
SECOND ARRAY
128 99 139 76 65
148 148 56 148 75
13 39 14 31 -42 -30 97
SUMS ENTERED IN SECOND ARRAY
-47 -94 30 82 164 88 -64
46 40 -31 0 -76 -7
DONE

Problem No. 8
5 PRINT "FIRST ARRAY"
10 FOR X=1 TO 4
20 FOR Y=1 TO 7
30 LET I(X,Y)=INT(1001*RND(1))-500)
40 NEXT Y
50 NEXT X
60 GSUBS 1000
70 FOR I=1 TO 4
80 FOR J=1 TO 7
90 LET I(1,J)=2+I(1,J)
100 NEXT J
110 NEXT I

```

SEC. 6-2 Cont'd

```

30 READ L(1)
35 LET TOTAL322*(N-3)
40 LET TOTAL322 THEN 70
40 PRINT "00"
60 GOTO 80
70 PRINT "11"
80 PRINT "22"
90 PRINT "33"
100 GOTO 10
110 DATA 5.1,0.1,1.1
120 DATA 1.1,0.0,0.1,1.0,0.1,1.0,0.0,0.1,0
130 DATA 1.1,0.0,0.1,1.0,0.1,1.0,0.0,0.1,0
RUN
END
NO.4

```

```

10111 BASE TWO = 33 BASE TEN
10 BASE TWO = 8 BASE TEN
10001101100010 BASE TWO = 18018 BASE TEN

```

Problem No. 4

```

10 READ N
15 LET T=0
20 FOR E=20 TO 0 STEP -1
40 LET I=INT(N/31E)
42 LET T=T+I
45 IF I=1 THEN 55
47 IF I=2 THEN 58
50 GOTO 60
55 PRINT "11"
57 GOTO 40
60 LET N=N-I
70 LET N=N
80 NEXT E
90 GOTO 10 BASE THREE"
100 DATA 999999.1,16
110 END
NO.4

```

```

99999. BASE TEN =161610000000 BASE THREE
16 BASE TEN =121 BASE THREE

```

OUT OF DATA IN LINE 10

Problem No. 6

```

5 REM N1 IS NUMBER OF DIGITS
10 READ N1
15 LET N=0
20 FOR I=1 TO N1 STEP -1
22 READ A
24 IF A=1 THEN 30
25 IF A=2 THEN 34
26 PRINT "00"
30 PRINT "11"
32 GOTO 40
40 LET N=N+A*(X-1)
50 NEXT X
60 PRINT "TOTALS"
110 LET T=0
130 FOR E=20 TO 0 STEP -1
140 LET I=INT(N/2+E)
150 LET T=T+I
160 IF T=0 THEN 210
170 IF I=1 THEN 200
180 PRINT "00"

```

```

150 LET N=N+1*10+E1
160 LET R=N*1*10+E
170 LET N=R
180 REM E1 TO B
190 PRINT N*(N+1)*G.C.F. = 11
200 LET I=INT(N/11)
210 LET R=N-I*11
220 LET N=R
230 LET N=N+1
240 LET N1=R
250 GOTO 200
260 REM E1 TO B
280 GOTO 30
350 END
RUN
END
NO.4

```

```

INPUT INTEGERS
25 SE G.C.F. = 1
INPUT INTEGERS 455
455 634 G.C.F. = 6
INPUT INTEGERS 779
779 977 G.C.F. = 1
INPUT INTEGERS
DOME

```

CHAP. 7

SEC. 7-2

Problem No. 2

```

95 REM * PRINTING A NUMERIC OF MORE
96 REM THAN ONE DIGIT USING STRING
97 REM SEE LINES 165, 182 AND 185
100 DIM WS(10)
110 LET BS="0123456789"
120 PRINT "POSITIVE INTEGER LESS THAN 10000000"
130 PRINT "ENTER N"
140 IF N=0 THEN 260
150 PRINT "N"
160 PRINT "N"
165 LET T=0
170 FOR I=0 TO 0 STEP -1
180 LET I=INT(N/101E)
182 LET T=T+1
185 IF T=0 THEN 200
190 LET BS=BS+I*11
200 LET N=N-I*101E
210 LET N=R
220 NEXT E
230 PRINT "S"
240 GOTO 120
260 END
RUN
NO.2

```

```

POSITIVE INTEGER LESS THAN 10000000189231
# 189231.
51892315
POSITIVE INTEGER LESS THAN 1000000070

```

Problem No. 4

```

2 REM ** NOTICE THAT THIS IS MUCH SIGHTERH
3 REM THEN A PROGRAM WITHOUT THE USE OF
4 REM STRINGS
5 DIM WS(12)
8 BS="0123456789TE"
10 READ N:R

```

```

110 PRINT "BS"
130 INPUT BS
140 CHANGE BS TO B
150 REM E1 TO B(0)
160 FOR LET AG(11) = AG(11) + 1
170 NEXT I
170 LET B(0) = 1
180 PRINT "CHAR NUM CODE"
190 FOR I=1 TO 12
200 IF AG(I) = 0 THEN 240
210 LET B(I) = 1
220 CHANGE B TO AS
230 PRINT "****" AS; " " "j A(1); " "j 1
240 NEXT I
250 END
RUN
NO.2

```

```

BS? SUPPOSE I DON'T WISH TO PLAY THIS GAME
CHAR NUM CODE
*** 7 32
*** 1 65
** 1A* 2 65
** 1D* 1 68
** 1E* 2 69
** 1G* 1 71
** 1I* 3 73
** 1L* 1 76
** 1M* 1 77
** 1N* 1 78
** 1O* 3 79
** 1P* 3 80
** 1S* 4 83
** 1T* 3 84
** 1U* 1 85
** 1V* 1 87
** 1Y* 1 89

```

Problem No. 4

```

100 DIM WS(7)
105 REM * FIND LONGEST STRING
110 REM * READ DATA AND FIND LONGEST STRING
110 LET L=0
120 FOR I=1 TO 7
130 IF L < WS(I) THEN 140
140 IF LEN(WS(I)) <= L THEN 160
150 LET L = LEN(WS(I))
160 NEXT I
165 REM * PRINT DAYS OF THE WEEK VERTICALLY
170 FOR J = 1 TO 7
180 FOR I = 1 TO L
190 PRINT TAB(3*J); EXT$(WS(I),I);
200 NEXT J
210 NEXT I
220 NEXT I
225 REM * DATA
230 DATA THURSDAY, MONDAY, TUESDAY, WEDNESDAY
240 DATA FRIDAY, SATURDAY
250 END
RUN
NO.4

```

```

S M T W T F S
U O U E H R A
N N E D U I T
D D S N R D U
A A D E S A R
Y Y D A A A
A Y A Y A Y

```

```

100 GOT0 010
200 PRINT "11"
210 LET R=N-12/E
220 LET NR =
230 PRINT " "
240 PRINT " " BASE TWO"
245 PRINT
250 GOT0 10,0-0.1,2
260 LET NR=NR*2
270 END
NR=6

10012 BASE THREE
200012101 BASE THREE
100110101001010 BASE TWO
10101010 BASE TWO

OUT OF DATA IN LINE 10

SEC. 6-3
Problem No. 2
5 PRINT "TEST FOR DIVISIBILITY BY THREE"
6 PRINT
10 PRINT "INPUT INTEGER"
20 INPUT N
30 IF N=0 THEN 999
40 FOR E=5 TO 0 STEP -1
50 LET I=INT(N/10/E)
60 LET NR=N-I*10/E
70 LET R=N-I*10/E
80 LET NR
90 NEXT I
100 NEXT N
110 IF 7/3=INT(7/3) THEN 130
120 PRINT "NOT DIVISIBLE BY THREE"
130 PRINT " " IS A FACTOR"
140 GOT0 6
999 END
NR=2

TEST FOR DIVISIBILITY BY THREE
INPUT INTEGERE3492
SUM OF DIGITS IS 27
3 IS A FACTOR
INPUT INTEGER37
SUM OF DIGITS IS 10
NOT DIVISIBLE BY THREE
INPUT INTEGER0
DONE

Problem No. 4
30 PRINT "INPUT INTEGER"
40 INPUT N
55 LET N=N
60 LET T=0
70 FOR I=1 TO N
80 LET N1=N
90 LET E1=-1
100 FOR E=5 TO 0 STEP -1
110 LET T=T+INT(N/10/E)
120 LET T=T+1
130 IF T=0 THEN 160
140 LET E1=E+1

```

```

30 LET T=0
40 PRINT N;"BASE TEN ="
50 FOR E=20 TO 0 STEP -1
60 LET I=INT(N/B^E)
70 LET T=T+I
80 PRINT " " THEN 430
90 PRINT DSE(I+1+I+1)
430 R=N-I*B^E
440 LET N=R
450 NEXT E
460 PRINT " " BASE "B"
470 GOT0 10 BASE 10
480 DATA 99862,112,79324,.9
490 DATA 64,2,999999,.3
500 END
NR=4

99862. BASE TEN =9995 BASE 12
7932.4 BASE TEN =13072 BASE 9
64.2 BASE TEN =1000001 BASE 5
999999. BASE TEN =121210202000 BASE 3

OUT OF DATA IN LINE 10

Problem No. 3
100 DIM DSE(10)
110 DSE="0123456789"
120 GOT0 140
130 PRINT "OUT OF RANGE"
140 PRINT " "
150 PRINT " "
160 INPUT N
170 IF ABS(N)<.000001 THEN 130
180 IF ABS(N)>999999. THEN 130
190 PRINT " "
200 PRINT " "
210 IF N=0 THEN 240
220 PRINT " "
230 LET N=ABS(N)
240 FOR E=20 TO 0 STEP -1
250 IF N=5 TO 10/E THEN 280
260 NEXT E
270 GOT0 350
280 FOR E1=E TO 0 STEP -1
300 LET I=INT(N/10/E1)
310 LET R=N-I*10/E1
320 LET NR
330 NEXT E1
340 PRINT " "
350 PRINT " "
360 FOR E1=-1 TO -6 STEP -1
370 LET I=INT(N/10/E1+.05)
380 PRINT DSE(I+1+.1)
390 LET NR=N-I*10/E1
400 LET NR
410 IF N<.000001 THEN 430
420 NEXT E1
430 PRINT "S"
440 END
NR=6

47-1-10023
47-1-10023
5-1-100235

SEC. 7-3
Problem No. 2
98 REM * TABULATE CHARACTER FREQUENCY
100 DIM A(127),B(72)

```

```

Problem No. 6
100 DIM WS(7)
105 REM * READ DATA AND FIND LONGEST STRING
110 LET L=0
120 FOR I = 1 TO 7
130 READ WS(I)
140 IF LEN(WS(I)) <= L THEN 160
150 LET L = LEN(WS(I))
160 NEXT I
165 REM * PRINT DAYS OF THE WEEK AT A SLANT
170 FOR I = 1 TO 7
180 FOR J = 1 TO 7
190 PRINT TAB(4*J+1) EXT$(WS(J),I,1)
200 NEXT J
210 PRINT
220 NEXT I
225 REM * DATA
228 DATA MONDAY, MONDAY, TUESDAY, WEDNESDAY
240 DATA THURSDAY, FRIDAY, SATURDAY
250 END
NR=6

S M T W T F S
U O U E D H R A
N O D E D U I T
O A D S N R D U
Y Y A D E S A R
Y Y A D E S A R
Y Y A D A A A
Y Y A Y A Y
Y Y A Y A Y

SEC. 7-5
Problem No. 2
90 REM * FILE PRINT ONE TO A RECORD
92 REM * WITH RESTART FEATURE
100 DIM RESTART
110 FILES TEST
120 FOR I=1 TO 1000
121 IF END #1 THEN 130
122 READ #1,INS
123 RESTART=RESTART+1
130 READ NS,A,B
132 IF NS="STOP" THEN 230
138 IF END #1 THEN 155
140 PRINT #1,INS,A,B
150 NEXT I
152 STOP
155 PRINT "FILE FULL"
170 DATA "WAGNER, WILHELM RICHARD",1813,1883
180 DATA "VERRAZANO, GIOVANNI",1860,1527
190 DATA "BRONTE, ANNE",1820,1849
210 DATA "CURIE, MARIE",1867,1934
220 DATA "VERNE, JULES",1828,1905
230 END
NR=2

WAGNER, WILHELM RICHARD
VERRAZANO, GIOVANNI
BRONTE, ANNE
CURIE, MARIE
VERNE, JULES

```

SEC. 7-5 Cont'd

Problem No. 4

```
90 REM * ALPHABETIZE JAMES IN A FILE
100 DIM AS(782+BS(72))
110 LET TEST=1
111 FOR N=1 TO 1000
112 READ #1, IJAS
113 NEXT N
114 LET N=N+1
115 LET N=N-1
116 READ #1, IJAS, A, A1
117 FOR J=1 TO N
118 READ #1, IJAS, A, A1
119 FOR J=1 TO N
120 READ #1, IJAS, A, A1
121 PRINT #1, IJAS, A, A1
122 NEXT J
123 PRINT "FILE ALPHABETIZED"
124 END
```

Problem No. 4

FILE ALPHABETIZED

```
GET-NO.3
RUN
NO.3
DOB NAME
1820 ANTHONY, SUSAN B.
1847 BELL, ALEXANDER GRAHAM
1850 BERNARD, MARIE
1857 CURIE, MARIE
1747 JONES, JOHN PAUL
1828 VERNE, JULES
1480 VERRAZANO, GIOVANNI
1854 WASHINGTON, GEORGE
1859 WASHINGTON, EDDIE T.
```

Problem No. 6

```
100 DIM AS(72)+BS(72)+AL(50)
110 FILES TEST
120 REM * COUNT NAME: AND SAVE
130 REM POSITION IN A ARRAY
140 REM FOR I=1 TO 500
150 FOR I=1 TO 500
160 READ #1, IJAS
170 LET AL(1)=I
180 NEXT I
190 REM * ARRANGE POSITIONS IN
200 REM * ARRAY
210 FOR R=1 TO I-1
220 READ #1, ACRIJAS
230 READ #1, ACRIJAS
240 IF AS <= BS THEN 310
250 READ #1, ACRIJAS
260 LET X=AL(1)
270 LET AL(1)=AL(J)
280 LET AL(J)=X
290 LET AS=BS
300 NEXT J
310 NEXT R
320 REM * NOW PRINT NAMES
330 REM * NAMES IN ORDER"
350 PRINT " DOB "
360 FOR N=1 TO I
370 READ #1, AENIJAS, I1
380 PRINT AENIJAS
```

Problem No. 4

```
10 LET CATN(20R(96)+2)
20 LET G=180*(3-14)59
30 LET M=INT((G-D)*60+.5)
40 LET M=INT((G-D)*60+.5)
45 PRINT "TWO ANGLES ARE:"
50 PRINT "TWO ANGLES ARE:"
60 LET G1=180-246
65 PRINT "THE THIRD ANGLE MEASURES"
70 PRINT INT((G1-INT(G1))*60+.5)"MINUTES"
80 PRINT INT((G1-INT(G1))*60+.5)"MINUTES"
90 END
RUN
NO.4
TWO ANGLES ARE
78 DEGREES 28 MINUTES
THE THIRD ANGLE MEASURES
23 DEGREES 4 MINUTES
DONE
```

Problem No. 6

```
10 LET CATN(20R(96)+2)
20 LET G=180*(3-14)59
30 LET D=INT(G)
40 LET M=INT((G-D)*60+.5)
50 LET M=INT((G-D)*60+.5)
60 LET G1=180-246
70 PRINT INT((G1-INT(G1))*60+.5)"MINUTES"
80 PRINT INT((G1-INT(G1))*60+.5)"MINUTES"
90 END
RUN
NO.6
47 DEGREES 23 MINUTES
22 DEGREES 37 MINUTES
DONE
```

Problem No. 8

```
10 LET H=1000/TAN(7+30/60)*3-14)59/180)
20 PRINT "HEIGHT 15'4\"FEET"
30 END
RUN
NO.8
HEIGHT 15 131.652 FEET
DONE
```

SEC. 9-3

Problem No. 2

```
10 LET X=3-14)59/180)
20 DEF FN(C)=5*W(C)+4
30 DEF FN(C)=INT((C*100+.5)/100)
35 READ X
36 IF X=-1 THEN 999
37 GOTO 40
38 GOTO 40
40 READ I, B1
58 REM FIND THE THIRD ANGLE
60 LET C1=180-(A1+B1)
62 READ C1, B1, A1
64 LET A1=180-(C1+B1)
68 REM 70 AND 80 COMPUTE THE OTHER TWO SIDES
80 LET B2=180*(C1/B1)
82 LET C2=180*(C1/B1)
84 LET C=FN(C1)/FN(B1)
98 REM NOW PRINT THE RESULTS
100 PRINT "THE A, B, C"
102 PRINT "THE A, B, C"
120 PRINT "THE SIDES ARE", FN(A), FN(B), FN(C)
140 PRINT
150 GOTO 35
```



```

80 LET A2=INT(A1)
90 LET A3=INT(A2)
100 LET A4=INT((A3-A1)*60-(A3-A2)*60+.5)
110 LET C2=INT(C1)
120 LET C3=INT((C1-C2)*60)
130 LET C4=INT((C3-C2)*60+.5)
140 PRINT "A1=";A1;"A2=";A2;"A3=";A3;"A4=";A4
150 PRINT "B1=";B1;"B2=";B2;"B3=";B3;"B4=";B4
160 PRINT "C1=";C1;"C2=";C2;"C3=";C3;"C4=";C4
170 GOTO 10
180 DATA 10, 5
190 DATA 30, 5, 7, 46.5
200 DATA 530, 20, 31, 18, 5, 2, 1
540 DATA 0, 0, 0, 0, 0
1000 END
11000 END
12000 END
13000 END
14000 END
15000 END
16000 END
17000 END
18000 END
19000 END
20000 END
21000 END
22000 END
23000 END
24000 END
25000 END
26000 END
27000 END
28000 END
29000 END
30000 END
31000 END
32000 END
33000 END
34000 END
35000 END
36000 END
37000 END
38000 END
39000 END
40000 END
41000 END
42000 END
43000 END
44000 END
45000 END
46000 END
47000 END
48000 END
49000 END
50000 END
51000 END
52000 END
53000 END
54000 END
55000 END
56000 END
57000 END
58000 END
59000 END
60000 END
61000 END
62000 END
63000 END
64000 END
65000 END
66000 END
67000 END
68000 END
69000 END
70000 END
71000 END
72000 END
73000 END
74000 END
75000 END
76000 END
77000 END
78000 END
79000 END
80000 END
81000 END
82000 END
83000 END
84000 END
85000 END
86000 END
87000 END
88000 END
89000 END
90000 END
91000 END
92000 END
93000 END
94000 END
95000 END
96000 END
97000 END
98000 END
99000 END
100000 END
101000 END
102000 END
103000 END
104000 END
105000 END
106000 END
107000 END
108000 END
109000 END
110000 END
111000 END
112000 END
113000 END
114000 END
115000 END
116000 END
117000 END
118000 END
119000 END
120000 END
121000 END
122000 END
123000 END
124000 END
125000 END
126000 END
127000 END
128000 END
129000 END
130000 END
131000 END
132000 END
133000 END
134000 END
135000 END
136000 END
137000 END
138000 END
139000 END
140000 END
141000 END
142000 END
143000 END
144000 END
145000 END
146000 END
147000 END
148000 END
149000 END
150000 END
151000 END
152000 END
153000 END
154000 END
155000 END
156000 END
157000 END
158000 END
159000 END
160000 END
161000 END
162000 END
163000 END
164000 END
165000 END
166000 END
167000 END
168000 END
169000 END
170000 END
171000 END
172000 END
173000 END
174000 END
175000 END
176000 END
177000 END
178000 END
179000 END
180000 END
181000 END
182000 END
183000 END
184000 END
185000 END
186000 END
187000 END
188000 END
189000 END
190000 END
191000 END
192000 END
193000 END
194000 END
195000 END
196000 END
197000 END
198000 END
199000 END
200000 END
201000 END
202000 END
203000 END
204000 END
205000 END
206000 END
207000 END
208000 END
209000 END
210000 END
211000 END
212000 END
213000 END
214000 END
215000 END
216000 END
217000 END
218000 END
219000 END
220000 END
221000 END
222000 END
223000 END
224000 END
225000 END
226000 END
227000 END
228000 END
229000 END
230000 END
231000 END
232000 END
233000 END
234000 END
235000 END
236000 END
237000 END
238000 END
239000 END
240000 END
241000 END
242000 END
243000 END
244000 END
245000 END
246000 END
247000 END
248000 END
249000 END
250000 END
251000 END
252000 END
253000 END
254000 END
255000 END
256000 END
257000 END
258000 END
259000 END
260000 END
261000 END
262000 END
263000 END
264000 END
265000 END
266000 END
267000 END
268000 END
269000 END
270000 END
271000 END
272000 END
273000 END
274000 END
275000 END
276000 END
277000 END
278000 END
279000 END
280000 END
281000 END
282000 END
283000 END
284000 END
285000 END
286000 END
287000 END
288000 END
289000 END
290000 END
291000 END
292000 END
293000 END
294000 END
295000 END
296000 END
297000 END
298000 END
299000 END
300000 END
301000 END
302000 END
303000 END
304000 END
305000 END
306000 END
307000 END
308000 END
309000 END
310000 END
311000 END
312000 END
313000 END
314000 END
315000 END
316000 END
317000 END
318000 END
319000 END
320000 END
321000 END
322000 END
323000 END
324000 END
325000 END
326000 END
327000 END
328000 END
329000 END
330000 END
331000 END
332000 END
333000 END
334000 END
335000 END
336000 END
337000 END
338000 END
339000 END
340000 END
341000 END
342000 END
343000 END
344000 END
345000 END
346000 END
347000 END
348000 END
349000 END
350000 END
351000 END
352000 END
353000 END
354000 END
355000 END
356000 END
357000 END
358000 END
359000 END
360000 END
361000 END
362000 END
363000 END
364000 END
365000 END
366000 END
367000 END
368000 END
369000 END
370000 END
371000 END
372000 END
373000 END
374000 END
375000 END
376000 END
377000 END
378000 END
379000 END
380000 END
381000 END
382000 END
383000 END
384000 END
385000 END
386000 END
387000 END
388000 END
389000 END
390000 END
391000 END
392000 END
393000 END
394000 END
395000 END
396000 END
397000 END
398000 END
399000 END
400000 END
401000 END
402000 END
403000 END
404000 END
405000 END
406000 END
407000 END
408000 END
409000 END
410000 END
411000 END
412000 END
413000 END
414000 END
415000 END
416000 END
417000 END
418000 END
419000 END
420000 END
421000 END
422000 END
423000 END
424000 END
425000 END
426000 END
427000 END
428000 END
429000 END
430000 END
431000 END
432000 END
433000 END
434000 END
435000 END
436000 END
437000 END
438000 END
439000 END
440000 END
441000 END
442000 END
443000 END
444000 END
445000 END
446000 END
447000 END
448000 END
449000 END
450000 END
451000 END
452000 END
453000 END
454000 END
455000 END
456000 END
457000 END
458000 END
459000 END
460000 END
461000 END
462000 END
463000 END
464000 END
465000 END
466000 END
467000 END
468000 END
469000 END
470000 END
471000 END
472000 END
473000 END
474000 END
475000 END
476000 END
477000 END
478000 END
479000 END
480000 END
481000 END
482000 END
483000 END
484000 END
485000 END
486000 END
487000 END
488000 END
489000 END
490000 END
491000 END
492000 END
493000 END
494000 END
495000 END
496000 END

```

[illegible]

```

23 DEF FNY(R)=R*SIN(G#K)
40 DEF FNR(X)=INT(X*100+.5)/100
50 FOR G=0 TO 360 STEP 15
90 IF ABS(-COS(G#K))>.0001 THEN 110
100 LET G1=G1+(-COS(G#K))
110 PRINT FNR(FNR(X#G1)),FNR(FNY(G1)),
120 GOTO 120
130 PRINT "X OR Y UNDEFINED",
140 LET H=SIN(G#K)*COS(G#K)
150 PRINT FNR(X#G1),FNR(FNY(X#G1))
160 NEXT G
170 END
180
RUN
40-2GH

```

SEC. 9-4

Problem No. 2(a),(b)

```

3 LET M=3.14159/180
10 DEF FNPR(X)=INTX*(100+5)/100
15 PRINT "Y=";Y;"X=";X;"ANGLE="
20 FOR G=0 TO 360 STEP 15
30 LET A=COS(C2*G)
40 LET B=CS2*G
50 PRINT "X=";FNPR(G);";Y=";FNPR(A);";Z=";FNPR(B);";G=";G
60 NEXT G
100 END
1100 END
1101 END
1102 END

```

	X	Y	X	Y	ANGLE
	.64	.82	.66	.18	15
	.43	.63	0	0	30
	.45	.73	.5	.87	45
	.62	.84	.18	.68	60
	.82	.84	0	0	75
	.82	.84	.18	.68	90
	.65	.84	.5	.87	105
	.43	.63	.5	.87	120
	.43	.63	.5	.87	135
	.43	.63	.5	.87	150
	.43	.63	.5	.87	165
	.43	.63	.5	.87	180
	.43	.63	.5	.87	195
	.43	.63	.5	.87	210
	.43	.63	.5	.87	225
	.43	.63	.5	.87	240
	.43	.63	.5	.87	255
	.43	.63	.5	.87	270
	.43	.63	.5	.87	285
	.43	.63	.5	.87	300
	.43	.63	.5	.87	315
	.43	.63	.5	.87	330
	.43	.63	.5	.87	345
	.43	.63	.5	.87	360

Problem No. 2(c),(d)

```

5 LET X=C3:14159/160
10 PRINT "
15 PRINT "COS(403)";
15 PRINT "X", "Y", "X", "Y", "ANGLE"
20 DEF FNR(X)=INT((X*100-.5)/100
30 FOR G=0 TO 360 STEP 15
40 LET C=COS(403*G)
50 LET D=SIN(256*G)
60 PRINT FNR(CDUS(G));FNR(C(SIN(G)*)),
70 PRINT FNR(CDUS(G));FNR(C(SIN(G)*)),G
80 NEXT G
90 END
100 SUN
110 8CD
120

```

X		CBS (°G)		SIN (2°G)		ANGLE	
1		0		0		0	
.48		.13		.48		.13	
.43		-.25		.75		.43	
.71		-.71		.71		.71	
							45

```

Problem No. 4
10 LET N=3.14159/180
20 PRINT "CONVERT FROM (A,B) TO (R,G)"
30 INPUT A,B
40 PRINT "A,B"
50 IF A<-.01 THEN GOTO 100
60 IF A>.01 THEN GOTO 100
70 IF A=0 THEN 170
80 IF B<0 THEN 130
90 IF B=0 THEN 130
100 IF B>0 THEN 130
110 GOTO 30
120 GOTO 30
130 PRINT "-B",270;"
140 GOTO 30
150 GOTO 30
160 GOTO 30
170 LET R=(G/A)*180
180 LET G=(G/A)/K
190 GOTO 120
200 LET G=180
210 GOTO 240
220 IF B=0 THEN 240
230 IF B<0 THEN 240
240 PRINT "R",G;"
250 GOTO 30
260 END
270
280-4
CONVERT FROM (A,B) TO (R,G)
A,B70.1
(R,G) FORM = ( , ) .903
A,B71.1
(R,G) FORM = (1.14121 , 225.
A,B7-.01.0
CONVE

```

Problem No. 6

```

10. PRINT "FIND INTEGRAL POWERS OF (A,B)"
20. PRINT "WHAT POWER?"
30. PRINT " "
40. INPUT N
50. PRINT "A,B"
60. INPUT A,B
70. GET C
80. LET C=C+1
90. FOR X=1 TO N
100. LET C=ME-B*F
110. LET D=AF*B*E
120. LET E=C
130. LET F=D
140. PRINT X;"(C",D;"E",F)
150. NEXT X
160. PRINT "END"
170. RUN
180.

```

WHAT POWER?)
A.B7-1,1-1)
1 (-)
2 (0)
3 (2)
4 (-2)
5 (0)
DONE

SEC. 10-3

```

10 DEF FNR(X)=INT(X*1000+.5)/1000
20 PRINT "TAKE ROOTS OF COMPLEX NUMBERS IN (A,B) FORM"
30 READ A,B,N
40 IF A=0 THEN GOTO 100
50 IF B=0 THEN GOTO 100
60 LET R=SQRT(A2+B2)
70 LET (RORCA2+8/2)
80 IF A < 0 THEN 120
90 IF A > 0 THEN 120
100
110
120

```

SEC. 10-3 Cont'd

```

104 LET G=2.14159/2
106 IF B=0 THEN 240
108 GOTO 160
110 LET G=PI/2+G
112 LET G=PI/2+G
114 LET G=PI/2+G
116 LET G=PI/2+G
118 LET G=PI/2+G
120 IF B=0 THEN 240
122 FOR X=1 TO N
124 LET Y=2.14159
126 LET Y=2.14159
128 LET Y=2.14159
130 LET Y=2.14159
132 LET Y=2.14159
134 LET Y=2.14159
136 LET Y=2.14159
138 LET Y=2.14159
140 LET Y=2.14159
142 LET Y=2.14159
144 LET Y=2.14159
146 LET Y=2.14159
148 LET Y=2.14159
150 LET Y=2.14159
152 LET Y=2.14159
154 LET Y=2.14159
156 LET Y=2.14159
158 LET Y=2.14159
160 LET Y=2.14159
162 LET Y=2.14159
164 LET Y=2.14159
166 LET Y=2.14159
168 LET Y=2.14159
170 LET Y=2.14159
172 LET Y=2.14159
174 LET Y=2.14159
176 LET Y=2.14159
178 LET Y=2.14159
180 LET Y=2.14159
182 LET Y=2.14159
184 LET Y=2.14159
186 LET Y=2.14159
188 LET Y=2.14159
190 LET Y=2.14159
192 LET Y=2.14159
194 LET Y=2.14159
196 LET Y=2.14159
198 LET Y=2.14159
200 LET Y=2.14159
202 LET Y=2.14159
204 LET Y=2.14159
206 LET Y=2.14159
208 LET Y=2.14159
210 LET Y=2.14159
212 LET Y=2.14159
214 LET Y=2.14159
216 LET Y=2.14159
218 LET Y=2.14159
220 LET Y=2.14159
222 LET Y=2.14159
224 LET Y=2.14159
226 LET Y=2.14159
228 LET Y=2.14159
230 LET Y=2.14159
232 LET Y=2.14159
234 LET Y=2.14159
236 LET Y=2.14159
238 LET Y=2.14159
240 LET Y=2.14159
242 LET Y=2.14159
244 LET Y=2.14159
246 LET Y=2.14159
248 LET Y=2.14159
250 LET Y=2.14159
252 LET Y=2.14159
254 LET Y=2.14159
256 LET Y=2.14159
258 LET Y=2.14159
260 LET Y=2.14159
262 LET Y=2.14159
264 LET Y=2.14159
266 LET Y=2.14159
268 LET Y=2.14159
270 LET Y=2.14159
272 LET Y=2.14159
274 LET Y=2.14159
276 LET Y=2.14159
278 LET Y=2.14159
280 LET Y=2.14159
282 LET Y=2.14159
284 LET Y=2.14159
286 LET Y=2.14159
288 LET Y=2.14159
290 LET Y=2.14159
292 LET Y=2.14159
294 LET Y=2.14159
296 LET Y=2.14159
298 LET Y=2.14159
300 LET Y=2.14159

```

TAKE ROOTS OF COMPLEX NUMBERS IN (A,B) FORM

```

100 LET A=0
102 LET B=0
104 LET C=0
106 LET D=0
108 LET E=0
110 LET F=0
112 LET G=0
114 LET H=0
116 LET I=0
118 LET J=0
120 LET K=0
122 LET L=0
124 LET M=0
126 LET N=0
128 LET O=0
130 LET P=0
132 LET Q=0
134 LET R=0
136 LET S=0
138 LET T=0
140 LET U=0
142 LET V=0
144 LET W=0
146 LET X=0
148 LET Y=0
150 LET Z=0
152 LET A1=0
154 LET A2=0
156 LET A3=0
158 LET A4=0
160 LET A5=0
162 LET A6=0
164 LET A7=0
166 LET A8=0
168 LET A9=0
170 LET A10=0
172 LET A11=0
174 LET A12=0
176 LET A13=0
178 LET A14=0
180 LET A15=0
182 LET A16=0
184 LET A17=0
186 LET A18=0
188 LET A19=0
190 LET A20=0
192 LET A21=0
194 LET A22=0
196 LET A23=0
198 LET A24=0
200 LET A25=0
202 LET A26=0
204 LET A27=0
206 LET A28=0
208 LET A29=0
210 LET A30=0
212 LET A31=0
214 LET A32=0
216 LET A33=0
218 LET A34=0
220 LET A35=0
222 LET A36=0
224 LET A37=0
226 LET A38=0
228 LET A39=0
230 LET A40=0
232 LET A41=0
234 LET A42=0
236 LET A43=0
238 LET A44=0
240 LET A45=0
242 LET A46=0
244 LET A47=0
246 LET A48=0
248 LET A49=0
250 LET A50=0
252 LET A51=0
254 LET A52=0
256 LET A53=0
258 LET A54=0
260 LET A55=0
262 LET A56=0
264 LET A57=0
266 LET A58=0
268 LET A59=0
270 LET A60=0
272 LET A61=0
274 LET A62=0
276 LET A63=0
278 LET A64=0
280 LET A65=0
282 LET A66=0
284 LET A67=0
286 LET A68=0
288 LET A69=0
290 LET A70=0
292 LET A71=0
294 LET A72=0
296 LET A73=0
298 LET A74=0
300 LET A75=0

```

CHAP. 11

SEC. 11-1

Problem No. 2

```

5. WHEN SUBTRACT TWO POLYNOMIALS
20 LET S(X)=0
30 NEXT X
40 READ N TO 2 STEP -1
50 READ C(X)
60 READ C(X)
70 PRINT C(X)*X^N-1
80 NEXT X
90 PRINT C(X)
100 PRINT C(X)
110 READ N1
120 FOR X=1 TO N1
130 PRINT C(X)*X^N1-1
140 PRINT C(X)*X^N1-1
150 PRINT C(X)
160 PRINT C(X)
170 FOR X=10 TO 1 STEP -1
180 LET S(X)=0
190 LET S(X)=0
200 LET S(X)=0
210 LET S(X)=0
220 FOR X=10 TO 2 STEP -1
230 LET S(X)=0
240 LET S(X)=0
250 PRINT S(X)*X^N1-1
260 NEXT X
270 PRINT S(X)*X^N1-1
280 PRINT S(X)*X^N1-1
290 DATA 5.46-7.6-0.1
299 END

```

```

120 NEXT I
125 FOR Z=4*B-1 TO 1 STEP -1
130 PRINT P(Z)
135 NEXT Z
140 PRINT Z
145 PRINT
150 NEXT T
155 NEXT I
160 NEXT J
165 NEXT K
170 NEXT L
175 NEXT M
180 NEXT N
185 NEXT O
190 NEXT P
195 NEXT Q
200 NEXT R
205 NEXT S
210 NEXT T
215 NEXT U
220 NEXT V
225 NEXT W
230 NEXT X
235 NEXT Y
240 NEXT Z
245 NEXT A
250 NEXT B
255 NEXT C
260 NEXT D
265 NEXT E
270 NEXT F
275 NEXT G
280 NEXT H
285 NEXT I
290 NEXT J
295 NEXT K
300 NEXT L
305 NEXT M
310 NEXT N
315 NEXT O
320 NEXT P
325 NEXT Q
330 NEXT R
335 NEXT S
340 NEXT T
345 NEXT U
350 NEXT V
355 NEXT W
360 NEXT X
365 NEXT Y
370 NEXT Z
375 NEXT A
380 NEXT B
385 NEXT C
390 NEXT D
395 NEXT E
400 NEXT F
405 NEXT G
410 NEXT H
415 NEXT I
420 NEXT J
425 NEXT K
430 NEXT L
435 NEXT M
440 NEXT N
445 NEXT O
450 NEXT P
455 NEXT Q
460 NEXT R
465 NEXT S
470 NEXT T
475 NEXT U
480 NEXT V
485 NEXT W
490 NEXT X
495 NEXT Y
500 NEXT Z
505 NEXT A
510 NEXT B
515 NEXT C
520 NEXT D
525 NEXT E
530 NEXT F
535 NEXT G
540 NEXT H
545 NEXT I
550 NEXT J
555 NEXT K
560 NEXT L
565 NEXT M
570 NEXT N
575 NEXT O
580 NEXT P
585 NEXT Q
590 NEXT R
595 NEXT S
600 NEXT T
605 NEXT U
610 NEXT V
615 NEXT W
620 NEXT X
625 NEXT Y
630 NEXT Z
635 NEXT A
640 NEXT B
645 NEXT C
650 NEXT D
655 NEXT E
660 NEXT F
665 NEXT G
670 NEXT H
675 NEXT I
680 NEXT J
685 NEXT K
690 NEXT L
695 NEXT M
700 NEXT N
705 NEXT O
710 NEXT P
715 NEXT Q
720 NEXT R
725 NEXT S
730 NEXT T
735 NEXT U
740 NEXT V
745 NEXT W
750 NEXT X
755 NEXT Y
760 NEXT Z
765 NEXT A
770 NEXT B
775 NEXT C
780 NEXT D
785 NEXT E
790 NEXT F
795 NEXT G
800 NEXT H
805 NEXT I
810 NEXT J
815 NEXT K
820 NEXT L
825 NEXT M
830 NEXT N
835 NEXT O
840 NEXT P
845 NEXT Q
850 NEXT R
855 NEXT S
860 NEXT T
865 NEXT U
870 NEXT V
875 NEXT W
880 NEXT X
885 NEXT Y
890 NEXT Z
895 NEXT A
900 NEXT B
905 NEXT C
910 NEXT D
915 NEXT E
920 NEXT F
925 NEXT G
930 NEXT H
935 NEXT I
940 NEXT J
945 NEXT K
950 NEXT L
955 NEXT M
960 NEXT N
965 NEXT O
970 NEXT P
975 NEXT Q
980 NEXT R
985 NEXT S
990 NEXT T
995 NEXT U
1000 NEXT V
1005 NEXT W
1010 NEXT X
1015 NEXT Y
1020 NEXT Z
1025 NEXT A
1030 NEXT B
1035 NEXT C
1040 NEXT D
1045 NEXT E
1050 NEXT F
1055 NEXT G
1060 NEXT H
1065 NEXT I
1070 NEXT J
1075 NEXT K
1080 NEXT L
1085 NEXT M
1090 NEXT N
1095 NEXT O
1100 NEXT P
1105 NEXT Q
1110 NEXT R
1115 NEXT S
1120 NEXT T
1125 NEXT U
1130 NEXT V
1135 NEXT W
1140 NEXT X
1145 NEXT Y
1150 NEXT Z
1155 NEXT A
1160 NEXT B
1165 NEXT C
1170 NEXT D
1175 NEXT E
1180 NEXT F
1185 NEXT G
1190 NEXT H
1195 NEXT I
1200 NEXT J
1205 NEXT K
1210 NEXT L
1215 NEXT M
1220 NEXT N
1225 NEXT O
1230 NEXT P
1235 NEXT Q
1240 NEXT R
1245 NEXT S
1250 NEXT T
1255 NEXT U
1260 NEXT V
1265 NEXT W
1270 NEXT X
1275 NEXT Y
1280 NEXT Z
1285 NEXT A
1290 NEXT B
1295 NEXT C
1300 NEXT D
1305 NEXT E
1310 NEXT F
1315 NEXT G
1320 NEXT H
1325 NEXT I
1330 NEXT J
1335 NEXT K
1340 NEXT L
1345 NEXT M
1350 NEXT N
1355 NEXT O
1360 NEXT P
1365 NEXT Q
1370 NEXT R
1375 NEXT S
1380 NEXT T
1385 NEXT U
1390 NEXT V
1395 NEXT W
1400 NEXT X
1405 NEXT Y
1410 NEXT Z
1415 NEXT A
1420 NEXT B
1425 NEXT C
1430 NEXT D
1435 NEXT E
1440 NEXT F
1445 NEXT G
1450 NEXT H
1455 NEXT I
1460 NEXT J
1465 NEXT K
1470 NEXT L
1475 NEXT M
1480 NEXT N
1485 NEXT O
1490 NEXT P
1495 NEXT Q
1500 NEXT R
1505 NEXT S
1510 NEXT T
1515 NEXT U
1520 NEXT V
1525 NEXT W
1530 NEXT X
1535 NEXT Y
1540 NEXT Z
1545 NEXT A
1550 NEXT B
1555 NEXT C
1560 NEXT D
1565 NEXT E
1570 NEXT F
1575 NEXT G
1580 NEXT H
1585 NEXT I
1590 NEXT J
1595 NEXT K
1600 NEXT L
1605 NEXT M
1610 NEXT N
1615 NEXT O
1620 NEXT P
1625 NEXT Q
1630 NEXT R
1635 NEXT S
1640 NEXT T
1645 NEXT U
1650 NEXT V
1655 NEXT W
1660 NEXT X
1665 NEXT Y
1670 NEXT Z
1675 NEXT A
1680 NEXT B
1685 NEXT C
1690 NEXT D
1695 NEXT E
1700 NEXT F
1705 NEXT G
1710 NEXT H
1715 NEXT I
1720 NEXT J
1725 NEXT K
1730 NEXT L
1735 NEXT M
1740 NEXT N
1745 NEXT O
1750 NEXT P
1755 NEXT Q
1760 NEXT R
1765 NEXT S
1770 NEXT T
1775 NEXT U
1780 NEXT V
1785 NEXT W
1790 NEXT X
1795 NEXT Y
1800 NEXT Z
1805 NEXT A
1810 NEXT B
1815 NEXT C
1820 NEXT D
1825 NEXT E
1830 NEXT F
1835 NEXT G
1840 NEXT H
1845 NEXT I
1850 NEXT J
1855 NEXT K
1860 NEXT L
1865 NEXT M
1870 NEXT N
1875 NEXT O
1880 NEXT P
1885 NEXT Q
1890 NEXT R
1895 NEXT S
1900 NEXT T
1905 NEXT U
1910 NEXT V
1915 NEXT W
1920 NEXT X
1925 NEXT Y
1930 NEXT Z
1935 NEXT A
1940 NEXT B
1945 NEXT C
1950 NEXT D
1955 NEXT E
1960 NEXT F
1965 NEXT G
1970 NEXT H
1975 NEXT I
1980 NEXT J
1985 NEXT K
1990 NEXT L
1995 NEXT M
2000 NEXT N
2005 NEXT O
2010 NEXT P
2015 NEXT Q
2020 NEXT R
2025 NEXT S
2030 NEXT T
2035 NEXT U
2040 NEXT V
2045 NEXT W
2050 NEXT X
2055 NEXT Y
2060 NEXT Z
2065 NEXT A
2070 NEXT B
2075 NEXT C
2080 NEXT D
2085 NEXT E
2090 NEXT F
2095 NEXT G
2100 NEXT H
2105 NEXT I
2110 NEXT J
2115 NEXT K
2120 NEXT L
2125 NEXT M
2130 NEXT N
2135 NEXT O
2140 NEXT P
2145 NEXT Q
2150 NEXT R
2155 NEXT S
2160 NEXT T
2165 NEXT U
2170 NEXT V
2175 NEXT W
2180 NEXT X
2185 NEXT Y
2190 NEXT Z
2195 NEXT A
2200 NEXT B
2205 NEXT C
2210 NEXT D
2215 NEXT E
2220 NEXT F
2225 NEXT G
2230 NEXT H
2235 NEXT I
2240 NEXT J
2245 NEXT K
2250 NEXT L
2255 NEXT M
2260 NEXT N
2265 NEXT O
2270 NEXT P
2275 NEXT Q
2280 NEXT R
2285 NEXT S
2290 NEXT T
2295 NEXT U
2300 NEXT V
2305 NEXT W
2310 NEXT X
2315 NEXT Y
2320 NEXT Z
2325 NEXT A
2330 NEXT B
2335 NEXT C
2340 NEXT D
2345 NEXT E
2350 NEXT F
2355 NEXT G
2360 NEXT H
2365 NEXT I
2370 NEXT J
2375 NEXT K
2380 NEXT L
2385 NEXT M
2390 NEXT N
2395 NEXT O
2400 NEXT P
2405 NEXT Q
2410 NEXT R
2415 NEXT S
2420 NEXT T
2425 NEXT U
2430 NEXT V
2435 NEXT W
2440 NEXT X
2445 NEXT Y
2450 NEXT Z
2455 NEXT A
2460 NEXT B
2465 NEXT C
2470 NEXT D
2475 NEXT E
2480 NEXT F
2485 NEXT G
2490 NEXT H
2495 NEXT I
2500 NEXT J
2505 NEXT K
2510 NEXT L
2515 NEXT M
2520 NEXT N
2525 NEXT O
2530 NEXT P
2535 NEXT Q
2540 NEXT R
2545 NEXT S
2550 NEXT T
2555 NEXT U
2560 NEXT V
2565 NEXT W
2570 NEXT X
2575 NEXT Y
2580 NEXT Z
2585 NEXT A
2590 NEXT B
2595 NEXT C
2600 NEXT D
2605 NEXT E
2610 NEXT F
2615 NEXT G
2620 NEXT H
2625 NEXT I
2630 NEXT J
2635 NEXT K
2640 NEXT L
2645 NEXT M
2650 NEXT N
2655 NEXT O
2660 NEXT P
2665 NEXT Q
2670 NEXT R
2675 NEXT S
2680 NEXT T
2685 NEXT U
2690 NEXT V
2695 NEXT W
2700 NEXT X
2705 NEXT Y
2710 NEXT Z
2715 NEXT A
2720 NEXT B
2725 NEXT C
2730 NEXT D
2735 NEXT E
2740 NEXT F
2745 NEXT G
2750 NEXT H
2755 NEXT I
2760 NEXT J
2765 NEXT K
2770 NEXT L
2775 NEXT M
2780 NEXT N
2785 NEXT O
2790 NEXT P
2795 NEXT Q
2800 NEXT R
2805 NEXT S
2810 NEXT T
2815 NEXT U
2820 NEXT V
2825 NEXT W
2830 NEXT X
2835 NEXT Y
2840 NEXT Z
2845 NEXT A
2850 NEXT B
2855 NEXT C
2860 NEXT D
2865 NEXT E
2870 NEXT F
2875 NEXT G
2880 NEXT H
2885 NEXT I
2890 NEXT J
2895 NEXT K
2900 NEXT L
2905 NEXT M
2910 NEXT N
2915 NEXT O
2920 NEXT P
2925 NEXT Q
2930 NEXT R
2935 NEXT S
2940 NEXT T
2945 NEXT U
2950 NEXT V
2955 NEXT W
2960 NEXT X
2965 NEXT Y
2970 NEXT Z
2975 NEXT A
2980 NEXT B
2985 NEXT C
2990 NEXT D
2995 NEXT E
3000 NEXT F
3005 NEXT G
3010 NEXT H
3015 NEXT I
3020 NEXT J
3025 NEXT K
3030 NEXT L
3035 NEXT M
3040 NEXT N
3045 NEXT O
3050 NEXT P
3055 NEXT Q
3060 NEXT R
3065 NEXT S
3070 NEXT T
3075 NEXT U
3080 NEXT V
3085 NEXT W
3090 NEXT X
3095 NEXT Y
3100 NEXT Z
3105 NEXT A
3110 NEXT B
3115 NEXT C
3120 NEXT D
3125 NEXT E
3130 NEXT F
3135 NEXT G
3140 NEXT H
3145 NEXT I
3150 NEXT J
3155 NEXT K
3160 NEXT L
3165 NEXT M
3170 NEXT N
3175 NEXT O
3180 NEXT P
3185 NEXT Q
3190 NEXT R
3195 NEXT S
3200 NEXT T
3205 NEXT U
3210 NEXT V
3215 NEXT W
3220 NEXT X
3225 NEXT Y
3230 NEXT Z
3235 NEXT A
3240 NEXT B
3245 NEXT C
3250 NEXT D
3255 NEXT E
3260 NEXT F
3265 NEXT G
3270 NEXT H
3275 NEXT I
3280 NEXT J
3285 NEXT K
3290 NEXT L
3295 NEXT M
3300 NEXT N
3305 NEXT O
3310 NEXT P
3315 NEXT Q
3320 NEXT R
3325 NEXT S
3330 NEXT T
3335 NEXT U
3340 NEXT V
3345 NEXT W
3350 NEXT X
3355 NEXT Y
3360 NEXT Z
3365 NEXT A
3370 NEXT B
3375 NEXT C
3380 NEXT D
3385 NEXT E
3390 NEXT F
3395 NEXT G
3400 NEXT H
3405 NEXT I
3410 NEXT J
3415 NEXT K
3420 NEXT L
3425 NEXT M
3430 NEXT N
3435 NEXT O
3440 NEXT P
3445 NEXT Q
3450 NEXT R
3455 NEXT S
3460 NEXT T
3465 NEXT U
3470 NEXT V
3475 NEXT W
3480 NEXT X
3485 NEXT Y
3490 NEXT Z
3495 NEXT A
3500 NEXT B
3505 NEXT C
3510 NEXT D
3515 NEXT E
3520 NEXT F
3525 NEXT G
3530 NEXT H
3535 NEXT I
3540 NEXT J
3545 NEXT K
3550 NEXT L
3555 NEXT M
3560 NEXT N
3565 NEXT O
3570 NEXT P
3575 NEXT Q
3580 NEXT R
3585 NEXT S
3590 NEXT T
3595 NEXT U
3600 NEXT V
3605 NEXT W
3610 NEXT X
3615 NEXT Y
3620 NEXT Z
3625 NEXT A
3630 NEXT B
3635 NEXT C
3640 NEXT D
3645 NEXT E
3650 NEXT F
3655 NEXT G
3660 NEXT H
3665 NEXT I
3670 NEXT J
3675 NEXT K
3680 NEXT L
3685 NEXT M
3690 NEXT N
3695 NEXT O
3700 NEXT P
3705 NEXT Q
3710 NEXT R
3715 NEXT S
3720 NEXT T
3725 NEXT U
3730 NEXT V
3735 NEXT W
3740 NEXT X
3745 NEXT Y
3750 NEXT Z
3755 NEXT A
3760 NEXT B
3765 NEXT C
3770 NEXT D
3775 NEXT E
3780 NEXT F
3785 NEXT G
3790 NEXT H
3795 NEXT I
3800 NEXT J
3805 NEXT K
3810 NEXT L
3815 NEXT M
3820 NEXT N
3825 NEXT O
3830 NEXT P
3835 NEXT Q
3840 NEXT R
3845 NEXT S
3850 NEXT T
3855 NEXT U
3860 NEXT V
3865 NEXT W
3870 NEXT X
3875 NEXT Y
3880 NEXT Z
3885 NEXT A
3890 NEXT B
3895 NEXT C
3900 NEXT D
3905 NEXT E
3910 NEXT F
3915 NEXT G
3920 NEXT H
3925 NEXT I
3930 NEXT J
3935 NEXT K
3940 NEXT L
3945 NEXT M
3950 NEXT N
3955 NEXT O
3960 NEXT P
3965 NEXT Q
3970 NEXT R
3975 NEXT S
3980 NEXT T
3985 NEXT U
3990 NEXT V
3995 NEXT W
4000 NEXT X
4005 NEXT Y
4010 NEXT Z
4015 NEXT A
4020 NEXT B
4025 NEXT C
4030 NEXT D
4035 NEXT E
4040 NEXT F
4045 NEXT G
4050 NEXT H
4055 NEXT I
4060 NEXT J
4065 NEXT K
4070 NEXT L
4075 NEXT M
4080 NEXT N
4085 NEXT O
4090 NEXT P
4095 NEXT Q
4100 NEXT R
4105 NEXT S
4110 NEXT T
4115 NEXT U
4120 NEXT V
4125 NEXT W
4130 NEXT X
4135 NEXT Y
4140 NEXT Z
4145 NEXT A
4150 NEXT B
4155 NEXT C
4160 NEXT D
4165 NEXT E
4170 NEXT F
4175 NEXT G
4180 NEXT H
4185 NEXT I
4190 NEXT J
4195 NEXT K
4200 NEXT L
4205 NEXT M
4210 NEXT N
4215 NEXT O
4220 NEXT P
4225 NEXT Q
4230 NEXT R
4235 NEXT S
4240 NEXT T
4245 NEXT U
4250 NEXT V
4255 NEXT W
4260 NEXT X
4265 NEXT Y
4270 NEXT Z
4275 NEXT A
4280 NEXT B
4285 NEXT C
4290 NEXT D
4295 NEXT E
4300 NEXT F
4305 NEXT G
4310 NEXT H
4315 NEXT I
4320 NEXT J
4325 NEXT K
4330 NEXT L
4335 NEXT M
4340 NEXT N
4345 NEXT O
4350 NEXT P
4355 NEXT Q
4360 NEXT R
4365 NEXT S
4370 NEXT T
4375 NEXT U
4380 NEXT V
4385 NEXT W
4390 NEXT X
4395 NEXT Y
4400 NEXT Z
4405 NEXT A
4410 NEXT B
4415 NEXT C
4420 NEXT D
4425 NEXT E
4430 NEXT F
4435 NEXT G
4440 NEXT H
4445 NEXT I
4450 NEXT J
4455 NEXT K
4460 NEXT L
4465 NEXT M
4470 NEXT N
4475 NEXT O
4480 NEXT P
4485 NEXT Q
4490 NEXT R
4495 NEXT S
4500 NEXT T
4505 NEXT U
4510 NEXT V
4515 NEXT W
4520 NEXT X
4525 NEXT Y
4530 NEXT Z
4535 NEXT A
4540 NEXT B
4545 NEXT C
4550 NEXT D
4555 NEXT E
4560 NEXT F
4565 NEXT G
4570 NEXT H
4575 NEXT I
4580 NEXT J
4585 NEXT K
4590 NEXT L
4595 NEXT M
4600 NEXT N
4605 NEXT O
4610 NEXT P
4615 NEXT Q
4620 NEXT R
4625 NEXT S
4630 NEXT T
4635 NEXT U
4640 NEXT V
4645 NEXT W
4650 NEXT X
4655 NEXT Y
4660 NEXT Z
4665 NEXT A
4670 NEXT B
4675 NEXT C
4680 NEXT D
4685 NEXT E
4690 NEXT F
4695 NEXT G
4700 NEXT H
4705 NEXT I
4710 NEXT J
4715 NEXT K
4720 NEXT L
4725 NEXT M
4730 NEXT N
4735 NEXT O
4740 NEXT P
4745 NEXT Q
4750 NEXT R
4755 NEXT S
4760 NEXT T
4765 NEXT U
4770 NEXT V
4775 NEXT W
4780 NEXT X
4785 NEXT Y
4790 NEXT Z
4795 NEXT A
4800 NEXT B
4805 NEXT C
4810 NEXT D
4815 NEXT E
4820 NEXT F
4825 NEXT G
4830 NEXT H
4835 NEXT I
4840 NEXT J
4845 NEXT K
4850 NEXT L
4855 NEXT M
4860 NEXT N
4865 NEXT O
4870 NEXT P
4875 NEXT Q
4880 NEXT R
4885 NEXT S
4890 NEXT T
4895 NEXT U
4900 NEXT V
4905 NEXT W
4910 NEXT X
4915 NEXT Y
4920 NEXT Z
4925 NEXT A
4930 NEXT B
4935 NEXT C
4940 NEXT D
4945 NEXT E
4950 NEXT F
4955 NEXT G
4960 NEXT H
4965 NEXT I
4970 NEXT J
4975 NEXT K
4980 NEXT L
4985 NEXT M
4990 NEXT N
4995 NEXT O
5000 NEXT P
5005 NEXT Q
5010 NEXT R
5015 NEXT S
5020 NEXT T
5025 NEXT U
5030 NEXT V
5035 NEXT W
5040 NEXT X
5045 NEXT Y
5050 NEXT Z
5055 NEXT A
5060 NEXT B
5065 NEXT C
5070 NEXT D
5075 NEXT E
5080 NEXT F
5085 NEXT G
5090 NEXT H
5095 NEXT I
5100 NEXT J
5105 NEXT K
5110 NEXT L
5115 NEXT M
5120 NEXT N
5125 NEXT O
5130 NEXT P
5135 NEXT Q
5140 NEXT R
5145 NEXT S
5150 NEXT T
5155 NEXT U
5160 NEXT V
5165 NEXT W
5170 NEXT X
5175 NEXT Y
5180 NEXT Z
5185 NEXT A
5190 NEXT B
5195 NEXT C
5200 NEXT D
5205 NEXT E
5210 NEXT F
5215 NEXT G
5220 NEXT H
5225 NEXT I
5230 NEXT J
5235 NEXT K
5240 NEXT L
5245 NEXT M
5250 NEXT N
5255 NEXT O
5260 NEXT P
5265 NEXT Q
5270 NEXT R
5275 NEXT S
5280 NEXT T
5285 NEXT U
5290 NEXT V
5295 NEXT W
5300 NEXT X
5305 NEXT Y
5310 NEXT Z
5315 NEXT A
5320 NEXT B
5325 NEXT C
5330 NEXT D
5335 NEXT E
5340 NEXT F
5345 NEXT G
5350 NEXT H
5355 NEXT I
5360 NEXT J
5365 NEXT K
5370 NEXT L
5375 NEXT M
5380 NEXT N
5385 NEXT O
5390 NEXT P
5395 NEXT Q
5400 NEXT R
5405 NEXT S
5410 NEXT T
5415 NEXT U
5420 NEXT V
5425 NEXT W
5430 NEXT X
5435 NEXT Y
5440 NEXT Z
5445 NEXT A
5450 NEXT B
5455 NEXT C
5460 NEXT D
5465 NEXT E
5470 NEXT F
5475 NEXT G
5480 NEXT H
5485 NEXT I
5490 NEXT J
5495 NEXT K
5500 NEXT L
5505 NEXT M
5510 NEXT N
5515 NEXT O
5520 NEXT P
5525 NEXT Q
5530 NEXT R
5535 NEXT S
5540 NEXT T
5545 NEXT U
5550 NEXT V
5555 NEXT W
5560 NEXT X
5565 NEXT Y
5570 NEXT Z
5575 NEXT A
5580 NEXT B
5585 NEXT C
5590 NEXT D
5595 NEXT E
5600 NEXT F
5605 NEXT G
5610 NEXT H
5615 NEXT I
5620 NEXT J
5625 NEXT K
5630 NEXT L
5635 NEXT M
5640 NEXT N
5645 NEXT O
5650 NEXT P
5655 NEXT Q
5660 NEXT R
5665 NEXT S
5670 NEXT T
5675 NEXT U
5680 NEXT V
5685 NEXT W
5690 NEXT X
5695 NEXT Y
5700 NEXT Z
5705 NEXT A
5710 NEXT B
5715 NEXT C
5720 NEXT D
5725 NEXT E
5730 NEXT F
5735 NEXT G
5740 NEXT H
5745 NEXT I
5750 NEXT J
5755 NEXT K
5760 NEXT L
5765 NEXT M
5770 NEXT N
5775 NEXT O
5780 NEXT P
5785 NEXT Q
5790 NEXT R
5795 NEXT S
5800 NEXT T
5805 NEXT U
5810 NEXT V
5815 NEXT W
5820 NEXT X
5825 NEXT Y
5830 NEXT Z
5835 NEXT A
5840 NEXT B
5845 NEXT C
5850 NEXT D
5855 NEXT E
5860 NEXT F
5865 NEXT G
5870 NEXT H
5875 NEXT I
5880 NEXT J
5885 NEXT K
5890 NEXT L
5895 NEXT M
5900 NEXT N
5905 NEXT O
5910 NEXT P
5915 NEXT Q
5920 NEXT R
5925 NEXT S
5930 NEXT T
5935 NEXT U
5940 NEXT V
5945 NEXT W
5950 NEXT X
5955 NEXT Y
5960 NEXT Z
5965 NEXT A
5970 NEXT B
5975 NEXT C
5980 NEXT D
5985 NEXT E
5990 NEXT F
5995 NEXT G
6000 NEXT H
6005 NEXT I
6010 NEXT J
6015 NEXT K
6020 NEXT L
6025 NEXT M
6030 NEXT N
6035 NEXT O
6040 NEXT P
6045 NEXT Q
6050 NEXT R
6055 NEXT S
6060 NEXT T
6065 NEXT U
6070 NEXT V
6075 NEXT W
6080 NEXT X
6085 NEXT Y
6090 NEXT Z
6095 NEXT A
6100 NEXT B
6105 NEXT C
6110 NEXT D
6115 NEXT E
6120 NEXT F
6125 NEXT G
6130 NEXT H
6135 NEXT I
6140 NEXT J
6145 NEXT K
6150 NEXT L
6155 NEXT M
6160 NEXT N
6165 NEXT O
6170 NEXT P
6175 NEXT Q
6180 NEXT R
6185 NEXT S
6190 NEXT T
6195 NEXT U
6200 NEXT V
6205 NEXT W
6210 NEXT X
6215 NEXT Y
6220 NEXT Z
6225 NEXT A
6230 NEXT B
6235 NEXT C
6240 NEXT D
6245 NEXT E
6250 NEXT F
6255 NEXT G
6260 NEXT H
6265 NEXT I
6270 NEXT J
6275 NEXT K
6280 NEXT L
6285 NEXT M
6290 NEXT N
6295 NEXT O
6300 NEXT P
6305 NEXT Q
6310 NEXT R
6315 NEXT S
6320 NEXT T
6325 NEXT U
6330 NEXT V
6335 NEXT W
6340 NEXT X
6345 NEXT Y
6350 NEXT Z
6355 NEXT A
6360 NEXT B
6365 NEXT C
6370 NEXT D
6375 NEXT E
6380 NEXT F
6385 NEXT G
6390 NEXT H
6395 NEXT I
6400 NEXT J
6405 NEXT K
6410 NEXT L
6415 NEXT M
6420 NEXT N
6425 NEXT O
6430 NEXT P
6435 NEXT Q
6440 NEXT R
6445 NEXT S
6450 NEXT T
6455 NEXT U
6460 NEXT V
6465 NEXT W
6470 NEXT X
6475 NEXT Y
6480 NEXT Z
6485 NEXT A
6490 NEXT B
6495 NEXT C
6500 NEXT D
6505 NEXT E
6510 NEXT F
6515 NEXT G
6520 NEXT H
6525 NEXT I
6530 NEXT J
6535 NEXT K
6540 NEXT L
6545 NEXT M
6550 NEXT N
6555 NEXT O
6560 NEXT P
6565 NEXT Q
6570 NEXT R
6575 NEXT S
6580 NEXT T
6585 NEXT U
6590 NEXT V
6595 NEXT W
6600 NEXT X
6605 NEXT Y
6610 NEXT Z
6615 NEXT A
6620 NEXT B
6625 NEXT C
6630 NEXT D
6635 NEXT E
6640 NEXT F
6645 NEXT G
6650 NEXT H
6655 NEXT I
6660 NEXT J
6665 NEXT K
6670 NEXT L
6675 NEXT M
6680 NEXT N
6685 NEXT O
6690 NEXT P
6695 NEXT Q
6700 NEXT R
6705 NEXT S
6710 NEXT T
6715 NEXT U
6720 NEXT V
6725 NEXT W
6730 NEXT X
6735 NEXT Y
6740 NEXT Z
6745 NEXT A
6750 NEXT B
6755 NEXT C
6760 NEXT D
6765 NEXT E
6770 NEXT F
6775 NEXT G
6780 NEXT H
6785 NEXT I
6790 NEXT J
6795 NEXT K
6800 NEXT L
6805 NEXT M
6810 NEXT N
6815 NEXT O
6820 NEXT P
6825 NEXT Q
6830 NEXT R
6835 NEXT S
6840 NEXT T
6845 NEXT U
6850 NEXT V
6855 NEXT W
6860 NEXT X
6865 NEXT Y
6870 NEXT Z
6875 NEXT A
6880 NEXT B
6885 NEXT C
6890 NEXT D
6895 NEXT E
6900 NEXT F
6905 NEXT G
6910 NEXT H
6915 NEXT I
6920 NEXT J
6925 NEXT K
6930 NEXT L
6935 NEXT M
6940
```

```

RUN
NO-2
3 X1 3 +2 X1 2 +6 X1 1 +-8
6 X1 4 +-7 X1 3 +8 X1 2 +0 X1 1 +-1
9 X1 4 +10 X1 3 +-6 X1 2 +6 X1 1 +-9
DONE

```

Problem No. 4

```

20 DIM P(20)
100 FOR J=1 TO 10
120 LET S=0
140 NEXT J
160 READ A THEN 400
180 FOR M=4 TO 1 STEP -1
200 READ P(X)
220 PRINT P(X)
240 PRINT X
260 READ B
300 FOR Y=8 TO 1 STEP -1
320 PRINT S(Y)
340 NEXT Y
360 NEXT J
380 FOR J=1 TO A
420 FOR J1 TO B
440 LET P1(+J-J1)*P(+J-J1)+P1(+J1)*S(J)
460 NEXT J1
500 FOR Z=A*B-1 TO 1 STEP -1
520 PRINT P(Z)
540 PRINT Z
560 PRINT
585 GOTO 100-2-0-2-1
595 DATA 3,2,5,2
600 DATA 2,3,2
605 DATA 2,2,3
610 DATA 1
620 END
RUN
NO-4
3 2 0 2 1
2 5 2
6 19 16 8 12 9 2
3 2
2 3
6 13 6
DONE

```

Problem No. 6

```

5 DIM P(20)
10 DEF FNM(X)=INT(X*RNDCX)+1-X/2)
20 FOR T=1 TO 5
25 FOR M=1 TO 10
30 LET F(+M)*S(+M)+P(+M)*10)=0
40 LET A=FNM(10)
45 FOR M=4 TO 1 STEP -1
50 FOR T=1 TO 23
55 PRINT F(X)
60 NEXT X
65 PRINT SPM(X)
75 FOR Y=8 TO 1 STEP -1
80 LET S(Y)=FNM(16)
85 PRINT S(Y)
95 PRINT X
100 FOR I=1 TO A
105 FOR J1 TO B
115 NEXT J

```

SEC. 11-2

Problem No. 2

```

10 DEF FNM(X)=INT(X*RNDC(1)-X/2)
15 FOR T=1 TO 3
20 PRINT
30 PRINT "ZEROS ARE1 " "J
50 FOR M=1 TO 4
60 LET P(X)=0
80 NEXT M
90 LET A=B+2
100 LET F1(+FNR(20)
120 LET S1(+FNR(20)
130 PRINT -S(1)
140 FOR I=1 TO A
160 LET P1(+J-J1)*P(+J-J1)+P1(+J1)*S(J)
170 NEXT J
180 NEXT I THEN 270
200 LET S=0
210 FOR M=1 TO 4
230 LET X1=P(X)
250 LET P1(+M)=0
260 NEXT X
280 NEXT J
290 PRINT "THE COEFFICIENTS ARE1 " "J
270 PRINT
300 NEXT X
310 NEXT T
330 PRINT
350 PRINT
370 END
RUN
NO-2
ZEROS ARE1 1 4 7
THE COEFFICIENTS ARE1 1 -12 39 -288
ZEROS ARE1 -4 8 -9
THE COEFFICIENTS ARE1 1 5 -68 -288
ZEROS ARE1 6 -7
THE COEFFICIENTS ARE1 1 -6 7 -36 -252
DONE

```

Problem No. 4

```

10 PRINT
20 READ N
35 IF N=-.01 THEN 420
40 READ P(S)
50 PRINT P(S)
60 NEXT S
70 LET Q=1
80 LET Q=1
90 PRINT "INTEGRAL ZERO(S) " "J
100 FOR M=1 TO P(1) STEP SON(P(1))
120 IF X=0 THEN 180
130 IF P1(+X) <> INT(P(1)/X) THEN 180
150 IF P=320 THEN 320
160 PRINT X
170 LET X=1
190 IF Q=1 THEN 240
200 PRINT
210 PRINT "ABS(P)+2"
220 FOR M=1 TO Q-1
230 PRINT M(X,2)K(X,1)
240 NEXT X
250 GOTO 10

```

Problem No. 4

```

10 DEF FNM(X)=12*X13-6*X12+17*X+195
20 LET A=0
30 FOR T=1 TO 5
40 LET S1=PNT(X)
50 LET S2=PNT(X+1)
60 IF S1&S2=0 THEN 90
70 LET S1=X
80 LET S1=X
82 IF X <> F THEN 90
84 IF S1 <> 0 THEN 90
90 NEXT X
92 IF S2 <> 0 THEN 100
940 PRINT X+S1 IS A ZERO"
960 FOR I=1 TO A
110 FOR J1 TO B
120 PRINT S(1)
130 NEXT J1
140 PRINT
150 PRINT
160 FOR I=1 TO A
180 LET I1=I
190 LET S1=1
200 LET D=C1(+PNT(F))-(PNT(F)-FNT(S))
220 IF FNT(X) <> 0 THEN 250
230 PRINT X1+IS A ZERO"
240 GOTO 340
250 FOR M=1 TO 10
260 PRINT X1+YIELDS FNT(X) =FNT(X)
270 GOTO 340
280 LET I1=I
290 LET I1=I
300 GOTO 190
310 LET I1=I-1
330 GOTO 190
340 NEXT I
350 END
NO-4
INTERVAL(S) BEGIN AT:
-2 2 3
-1.44714 YIELDS FNT(X) = 6.10352E-05
-1.44714 YIELDS FNT(X) =-6.10352E-05
3.90715 YIELDS FNT(X) =-3.90715E-05
DONE

```

SEC. 11-4

Problem No. 2

```

10 DEF FNM(X)=P(9)*X+B*(8)*X7-P(1)*X(6)*P(6)*S(P(5))*X+4
20 DEF FNM(X)=P(4)*X+X3-P(3)*X(2)*P(2)*X*(P(1))
40 PRINT
41 FOR X=1 TO 9
60 NEXT X
70 READ N
75 IF N=-.01 THEN 500
80 FOR M=1 TO 1 STEP -1
90 READ P(S)
110 PRINT P(S)
120 NEXT S
130 PRINT "INTEGRAL ZERO1 " "J
140 FOR X=1 TO P(1) STEP SON(P(1))
150 IF X=0 THEN 200
170 IF FNM(X) <> INT(P(1)/X) THEN 200
180 PRINT X
190 GOTO 210
200 NEXT X
210 LET X=X
220 PRINT "SYNTHETIC DIVISION BY X =-J1+YIELDS1"
230 PRINT P(N)
240 FOR X=N-1 TO 1 STEP -1

```

SEC. 11-4 Cont'd

```
250 LET P(X)=P(X)+P(X-1)*R
260 PRINT P(X)
270 IF X=2 THEN 280
280 NEXT X
300 FOR X=1 TO N-1
320 NEXT X
320 NEXT X
325 LET P(N)=Q
330 IF N=4 THEN 360
350 GOTO 130
360 LET D=P(2)*2-AP(X-1)*P(1)
370 LET A=P(1)*F
390 LET B=SORTABS(D)*F
400 IF D=0 THEN 440
410 IF D<0 THEN 440
420 PRINT ABS("ARG: ",I)
430 PRINT ABS("AND ",I)+B
430 GOTO 40
440 PRINT "NON-NEAL Zeros!"
450 IF D=0 THEN 460
460 GOTO 40 ("IAT",I)+B-1 AND ("IA",I)+B-1)
470 DATA 4,1,2,-1,-2
480 DATA 5,2,5,-3,1,-2,-4,5
500 END
510
RUN
NO-2
1 2 -1 -2 INTEGRAL ZERO! 1
2 5 -31 -21 -45 INTEGRAL ZERO! -5
SYNTHETIC DIVISION BY X-1 YIELDS: 1
SYNTHETIC DIVISION BY X-1 INTEGRAL ZERO! 1
2 -3 -9 NEAL ZERO! 3 AND -1,5
DONE
```

CHAP. 12

SEC. 12-1

```
Problem No. 2
10 DIM A(3,12)
20 MAT READ A
30 FOR X=1 TO 12
50 NEXT X
60 MAT PRINT A
65 DATA 1,2,3,4,5,6,7,23,51,47,56,23,4
70 END
NO-2
1 2 3 4 5 6 7 23 51 47 56 23
2 -3 43 90 45 32 -89 65 43 -96 0 1 6
3 -1 46 94 50 38 -82 89 94 -49 56 23
DONE
Problem No. 4
10 DIM A(4,3)
20 MAT READ A
30 FOR X=1 TO 3
40 FOR R=1 TO 4
50 FOR C=1 TO 3
60 LET A(R,C)=3*A(R,C)
70 NEXT R
80 NEXT X
```

```
70 MAT PRINT A
80 END
NO-1
123 97
DONE
Problem No. 8
20 MAT A(2,2)=B(2,2)+C(2,2)+D(2,2)
30 DATA -2,1,1,5,-5,1,2,3,4
40 MAT C=A+B
50 MAT D=A-B
60 MAT PRINT D
70 MAT D=B+A
80 PRINT "B+A"
90 MAT B=C-D
100 END PRINT D
110
RUN
NO-2
A+B
1 0
0 1
B+A
9 4
1 0
0 1
500 PRINT "ROAD","TUNNEL","BRIDGE"
510 MAT PRINT C
520 END
NO-2
```

Problem No. 4

```
20 DIM A(4,3)=B(4,3)+C(4,3)
30 DATA 6,3,2,5,3,2,4,3,2,3,2,1
140 MAT READ B
150 FOR C=1 TO 4
240 FOR C=1 TO 3
300 FOR C=1 TO 3
340 NEXT X
360 NEXT C
380 LET C(R,C)=0
390 LET C(R,C)=C(R,C)+B(R,X)+A(X,C)
340 NEXT X
360 NEXT C
500 PRINT "ROAD","TUNNEL","BRIDGE"
510 MAT PRINT C
520 END
NO-2
```

Problem No. 10

```
10 DIM A(1,12),B(12,1),C(12,12)
20 MAT READ A
30 MAT READ B
40 MAT READ C
50 MAT C=B+A
60 MAT PRINT C
100 DATA 1,2,3,4,5,6,7,8,9,10,11,12
200 END
NO-10
1 2 3 4 5 6 7 8 9 10 11 12
2 4 6 8 10 12 14 16 18 20 22 24
3 6 9 12 15 18 21 24 27 30 33 36
4 8 12 16 20 24 28 32 36 40 44 48
5 10 15 20 25 30 35 40 45 50 55 60
6 12 18 24 30 36 42 48 54 60 66 72
7 14 21 28 35 42 49 56 63 70 77 84
8 16 24 32 40 48 56 64 72 80 88 96
9 18 27 36 45 54 63 72 81 90 99 108
10 20 30 40 50 60 70 80 90 100 110 120
11 23 33 44 55 66 77 88 99 110 121 132
12 24 36 48 60 72 84 96 108 120 132 144
DONE
```

Problem No. 6

```
10 PRINT "BECAUSE THE DIMENSIONS ARE"
20 PRINT "NON-CONFORMING"
30 END
NO-6
BECAUSE THE DIMENSIONS ARE
NON-CONFORMING
DONE
```

61 55
123 97
DONE

Problem No. 8

```
20 MAT A(2,2)=B(2,2)+C(2,2)+D(2,2)
30 DATA -2,1,1,5,-5,1,2,3,4
40 MAT C=A+B
50 MAT D=A-B
60 MAT PRINT D
70 MAT D=B+A
80 PRINT "B+A"
90 MAT B=C-D
100 END PRINT D
110
RUN
NO-2
A+B
1 0
0 1
B+A
9 4
1 0
0 1
500 PRINT "ROAD","TUNNEL","BRIDGE"
510 MAT PRINT C
520 END
NO-10
1 2 3 4 5 6 7 8 9 10 11 12
2 4 6 8 10 12 14 16 18 20 22 24
3 6 9 12 15 18 21 24 27 30 33 36
4 8 12 16 20 24 28 32 36 40 44 48
5 10 15 20 25 30 35 40 45 50 55 60
6 12 18 24 30 36 42 48 54 60 66 72
7 14 21 28 35 42 49 56 63 70 77 84
8 16 24 32 40 48 56 64 72 80 88 96
9 18 27 36 45 54 63 72 81 90 99 108
10 20 30 40 50 60 70 80 90 100 110 120
11 23 33 44 55 66 77 88 99 110 121 132
12 24 36 48 60 72 84 96 108 120 132 144
DONE
```

```

85 PRINT
90 MAT PRINT A1
95 DATA 2,56,78,3,20,45,3,9,67,3,56,4,90,23,4
100 END
RUN
NO.4
2 56 78
3 20 45
3 9 67,3
56,4 90 23,4
6 168 32,4
9 60 135
9 27 2019
1692 270 702
DONE
Problem No. 6
10 DIM A(2,3)
20 MAT READ A
30 MAT PRINT A1
40 FOR I=1 TO 3
60 LET C1=C1+A(I,1)
70 LET C2=C2+A(I,2)
80 LET C3=C3+A(I,3)
90
100 GOTO 110
110 LET C4=C1+1*(I+1,C1)
120 NEXT I
130 MAT PRINT A1
140 DATA 3,67,32,45,90,3,9,57,3,3,1
150 END
RUN
NO.6
3 67 32 45 90
2 9 57 -3 1
-3 -201 -32 -135 -90
-6 -9 -171 3 -3
DONE
Problem No. 8
10 DIM X(2,6)
20 FOR N=1 TO 2
30 FOR C=1 TO 6
50 NEXT C
60 NEXT N
70 MAT PRINT A1
80 END
RUN
NO.8
1 1 1 1 1 1
1 1 1 1 1 1
DONE
Problem No. 10
10 DIM A(3,3)
20 FOR M=1 TO 2
30 FOR I=1 TO 3
40 LET A(I,M)=I
50 NEXT I
60 NEXT M
70 NEXT X
80 NEXT Y

```

SEC. 12-3

Problem No. 2

```

10 DIM A(4,4),B(4,1),C(4,1)
20 MAT READ A
30 MAT READ B
40 MAT READ C
50 DATA -1,2,-3,4
70 MAT C=C+B
80 MAT PRINT C
90 END
RUN
NO.2
1 2 3 4
-23
64
-12
DONE

```

Problem No. 4

```

10 DIM A(2,3),B(2,3),C(2,2),D(2,2)
20 MAT READ A,B
30 MAT READ C
40 MAT READ D
50 MAT D=B+A
60 MAT PRINT D
70 MAT PRINT C1
80 MAT PRINT D1
90 MAT PRINT D1
100 LET C=C+1*(I+1,C1)
110 PRINT "CONCLUDE THAT MATRIX"
120 PRINT "MULTIPLICATION IS NOT"
130 END
140 DATA 3,67,32,45,90,3,9,57,3,3,1
150 END
RUN
NO.4
A+B 0
C 0 0
A+B -8 -32
A+B -8 -32
1 8
2

```

```

1 CONCLUDE THAT MATRIX
MULTIPLICATION IS NOT
COMMUTATIVE
DONE

```

Problem No. 6

```

10 DIM A(2,2),B(2,3),C(3,2),D(2,3)
20 MAT READ A,B,C
30 DATA 1,2,3,4,-1,-2,3,2,-1,1,5,31
40 MAT D=B+C
50 MAT PRINT D
60 MAT PRINT C
70 PRINT "A+B+C"
80 MAT PRINT F1
90 MAT PRINT F2
100 MAT PRINT F3
110 PRINT "A+B+C"
120 MAT PRINT F1
130 END
RUN
NO.6
A+B+C
61 55
153 97
A+B+C1

```

SEC. 12-4

Problem No. 2

```

10 DIM B(2,3),C(2,2),D(2,2)
20 MAT READ B
30 MAT C=INV(B)
40 MAT PRINT C
50 MAT D=B+C
60 MAT D=B+C
70 PRINT "B=INV(B)"
80 MAT PRINT D
90 PRINT "INV(B)=B"
100 MAT PRINT D
110 DATA -8,-3,0,-1
120 END
RUN
NO.2

```

```

INV(B)
--185

```

Problem No. 4

```

10 DIM C(3,3),K(3,1),S(3,1),I(3,3)
20 MAT READ C,K
30 MAT READ INV(C)
40 MAT S=INV(C)
50 MAT PRINT S
100 DATA 2,-9,-5,7,-6,5,9,-6,5
110 DATA 2,-35,-39
120 END
RUN
NO.4
-6
-9
-999998
-3

```

Problem No. 6

```

10 DIM C(4,3),K(4,1),I(4,4),S(4,1)
20 MAT READ C,K
30 MAT I=INV(C)
40 MAT S=INV(C)
50 MAT PRINT S
100 DATA -4,3,6,5,-7,5,-7,-1
102 DATA -3,1,3,6,-2,-4,-7
105 DATA -12,77,31,-76
110 END
RUN
NO.6
-3
4
-6
6
DONE

```

Problem No. 8

```
10 DIM C(3,3),K(3,1),S(1,1),I(3,3)
20 MAT I=INV(C)
30 MAT K=C*I
40 MAT S=I*K
50 PRINT S
100 DATA -9,-2,0,-9,8,5
105 DATA -11,9,28,5,46,-1
110 END
RUN
NO.8
```

-6.7

-600031

-299998

DONE

Problem No. 10

```
10 DIM C(10,10),K(10,1),I(10,10),S(10,1)
20 REM WE ALLOW UP TO TEN UNKNOWNS
30 DIM X(10)
25 IF N=0 THEN 999
30 MAT READ C(N,N),K(N,1)
40 PRINT "COEFFICIENT MATRIX"
60 PRINT "CONSTANT TERM"
70 MAT PRINT K
80 MAT PRINT C
90 MAT S=K*INV(C)
100 MAT I=INV(C)
110 MAT S=I*K
120 MAT PRINT S
130 MAT PRINT X
140 GOTO 20
200 DATA 2,3,1,5,-3,7,2
210 DATA 1,0,2,3,-1,3,0,1,1,-2,-5
220 DATA 20,0,0,6
230 DATA 0
240 END
999 END
NO.10
```

COEFFICIENT MATRIX

2 1

5 -3

CONSTANT TERMS

7

SOLUTIONS

21

3

COEFFICIENT MATRIX

2 3 -1

3 0 1

1 -2 -5

CONSTANT TERMS

25

0

6

SOLUTIONS

1.

5.

-3

DONE

36 118 40

-5 -1 7

12 40 -8

TRNKA**TRN(B)

3 21 12

26 7 -11

58 75 17

DONE

NO.8

CHAP. 13

SEC. 13-2

Problem No. 2

```
10 LET N=1
20 FOR X=14 TO 1 STEP -1
30 LET N=N*X
40 LET N=N/2
50 LET N=N/2
60 PRINT N
70 END
NO.2
```

4+.35891E+10

DONE

Problem No. 4

```
10 LET P=1
20 FOR X=5 TO 13 STEP -1
30 LET P=P*X
40 NEXT X
50 FOR X=12 TO 1 STEP -1
60 LET P=P*X
70 PRINT P
80 PRINT P
90 END
NO.4
```

1-.55112E+25

DONE

Problem No. 6

```
10 LET C=1
20 FOR X=52 TO 52-5+1 STEP -1
30 LET C=C*X
40 NEXT X
50 FOR X=5 TO 1 STEP -1
60 LET C=C/X
70 NEXT X
80 PRINT C*HANDS"
90 END
NO.6
```

2-.59896E+06 HANDS

DONE

Problem No. 8

```
5 LET N=1
10 FOR X=365 TO 365-5+1 STEP -1
20 LET N=N*X
30 NEXT X
40 PRINT N
50 END
```

40 NEXT X

50 FOR X=4 TO 1 STEP -1

60 NEXT X

70 NEXT X

80 PRINT "STRAIGHT COMMITTEES"

90 LET C=13*12/(2*1)

100 LET C=C*11/(2*1)

110 LET C=C*10/(2*1)

120 PRINT "TWO GIRLS AND TWO BOYS" C2

130 LET C=13*12*10*15/(1*2*3)

140 LET C=C*11/(2*1)

150 LET C=C*10*15*14/(4*3*2*1)

160 PRINT "ALL GIRLS" C

170 LET C=13*12*11*10/(4*3*2*1)

180 PRINT "ALL BOYS" C

200 END

RUN

NO.18

87405 STRAIGHT COMMITTEES

TWO GIRLS AND TWO BOYS 10608

ALL GIRLS AND THREE GIRLS 8840

ALL BOYS 715

DONE

Problem No. 20

```
10 LET N=1
20 FOR X=52 TO 52-5+1 STEP -1
30 LET N=N*X
40 NEXT X
50 LET N=N/2 TO 1 STEP -1
60 NEXT X
100 FOR X=52-5 TO (52-5)-5+1 STEP -1
110 LET N=N*X
120 NEXT X
130 FOR X=5 TO 1 STEP -1
140 LET N=N*1/X
150 NEXT X
160 PRINT "PAIRS OF FIVE CARD HANDS"
200 END
RUN
NO.20
```

3-.9865E+12 PAIRS OF FIVE CARD HANDS

DONE

SEC. 13-3

Problem No. 2

```
10 LET N=2
20 FOR X=5 TO 1 STEP -1
30 LET N=N*X
40 NEXT X
50 LET N=N/2
60 FOR X=10 TO 1 STEP -1
70 LET N=N/X
80 NEXT X
90 PRINT N/D
100 END
RUN
NO.2
```

-2

DONE

Problem No. 4

```
10 LET N=1
20 FOR X=52 TO 52-5+1 STEP -1
30 LET N=N*X
40 NEXT X
50 FOR X=5 TO 1 STEP -1
60 LET N=N/X
70 NEXT X
```

SEC. 12-5

Problem No. 2

```
10 DIM A(3,3),B(3,3),C(3,3)
20 MAT READ A
30 MAT PRINT A
40 PRINT "TRN(A)"
50 MAT PRINT B
60 MAT C=A*B
70 MAT PRINT C
80 MAT PRINT C
90 MAT C=A-B
100 PRINT "A-TRN(A)"
110 PRINT "B-TRN(B)"
120 MAT C=B-A
130 MAT PRINT C
140 PRINT "TRN(A)-A"
150 MAT PRINT C
160 MAT PRINT C
170 MAT PRINT C
180 MAT PRINT C
190 MAT PRINT C
200 MAT PRINT C
210 MAT PRINT C
220 MAT PRINT C
230 MAT PRINT C
240 MAT PRINT C
250 MAT PRINT C
260 MAT PRINT C
270 MAT PRINT C
280 MAT PRINT C
290 MAT PRINT C
300 MAT PRINT C
310 MAT PRINT C
320 MAT PRINT C
330 MAT PRINT C
340 MAT PRINT C
350 MAT PRINT C
360 MAT PRINT C
370 MAT PRINT C
380 MAT PRINT C
390 MAT PRINT C
400 MAT PRINT C
410 MAT PRINT C
420 MAT PRINT C
430 MAT PRINT C
440 MAT PRINT C
450 MAT PRINT C
460 MAT PRINT C
470 MAT PRINT C
480 MAT PRINT C
490 MAT PRINT C
500 MAT PRINT C
510 MAT PRINT C
520 MAT PRINT C
530 MAT PRINT C
540 MAT PRINT C
550 MAT PRINT C
560 MAT PRINT C
570 MAT PRINT C
580 MAT PRINT C
590 MAT PRINT C
600 MAT PRINT C
610 MAT PRINT C
620 MAT PRINT C
630 MAT PRINT C
640 MAT PRINT C
650 MAT PRINT C
660 MAT PRINT C
670 MAT PRINT C
680 MAT PRINT C
690 MAT PRINT C
700 MAT PRINT C
710 MAT PRINT C
720 MAT PRINT C
730 MAT PRINT C
740 MAT PRINT C
750 MAT PRINT C
760 MAT PRINT C
770 MAT PRINT C
780 MAT PRINT C
790 MAT PRINT C
800 MAT PRINT C
810 MAT PRINT C
820 MAT PRINT C
830 MAT PRINT C
840 MAT PRINT C
850 MAT PRINT C
860 MAT PRINT C
870 MAT PRINT C
880 MAT PRINT C
890 MAT PRINT C
900 MAT PRINT C
910 MAT PRINT C
920 MAT PRINT C
930 MAT PRINT C
940 MAT PRINT C
950 MAT PRINT C
960 MAT PRINT C
970 MAT PRINT C
980 MAT PRINT C
990 MAT PRINT C
END
```

```
TRN(A)
5 6 3
3 -2 9
1 9 1
A-TRN(A)
10 9 4
9 -4 18
4 18 2
A-TRN(A)
0 -3 -2
3 0 0
2 0 0
```

```
TRN(A)-A
0 3 2
-3 0 0
-2 0 0
DONE
Problem No. 4
10 DIM A(3,3),B(3,3),C(3,3),D(3,3)
20 MAT READ A,B
30 MAT C=A*B
40 MAT D=C*B
50 PRINT "TRN(A*B)"
60 MAT PRINT D
70 MAT C=TRN(A)
80 MAT C=TRN(B)
90 MAT E=D+C
100 PRINT "TRN(B)*TRN(A)"
110 MAT PRINT C
120 MAT E=C*D
130 PRINT "TRN(A)*TRN(B)"
140 MAT PRINT E
150 MAT PRINT C
160 MAT PRINT C
170 MAT PRINT C
180 MAT PRINT C
190 MAT PRINT C
200 MAT PRINT C
210 MAT PRINT C
220 MAT PRINT C
230 MAT PRINT C
240 MAT PRINT C
250 MAT PRINT C
260 MAT PRINT C
270 MAT PRINT C
280 MAT PRINT C
290 MAT PRINT C
300 MAT PRINT C
310 DATA 6,3,2,5,2,4,1,1,2,6
END
```

```
TRN(A*B)
36 118 40
-5 -1 7
12 40 -8
TRN(B)*TRN(A)
```

RUN

NO.8

```
6-30255E+12
DONE
Problem No. 10
10 PRINT 2613*1013"DIFFERENT PLATES"
20 END
END
NO.10
1-175760E-07 DIFFERENT PLATES
DONE
```

Problem No. 12

```
5 LET T=0
10 FOR F=5 TO 0 STEP -1
20 FOR P=5 TO 5-F+1 STEP -1
30 LET P=P*P
40 NEXT P
50 NEXT F
60 PRINT "F*P*P"
70 NEXT F
75 PRINT "TOTAL NUMBER OF SIGNALS IS"
END
NO.12
```

```
5 FLAGS 120 SIGNALS
4 FLAGS 120 SIGNALS
3 FLAGS 60 SIGNALS
2 FLAGS 20 SIGNALS
1 FLAGS 1 SIGNALS
0 FLAGS 1 SIGNALS
TOTAL NUMBER OF SIGNALS IS 326
```

Problem No. 14

```
10 LET G=1
20 FOR X=50 TO 50-25+1
30 LET G=G*X
40 NEXT X
50 PRINT G
60 FOR X=25 TO 1 STEP -1
70 LET G=G/X
80 NEXT X
90 PRINT G
100 END
RUN
```

```
6-44695E-26 GUEST LISTS
DONE
```

Problem No. 16

```
10 LET N=1
20 FOR X=14 TO 1 STEP -1
30 LET N=N*X
40 NEXT X
50 PRINT N
60 END
NO.16
```

1-74357E+11

DONE

Problem No. 18

```
10 LET C=1
20 FOR A=30 TO 30-4+1 STEP -1
30 LET C=C*A
```

80 PRINT 1/N

90 END

RUN

NO.4

3-84769E-07

DONE

Problem No. 6

```
10 PRINT (1/2)*10
20 END
END
NO.6
```

9-76562E-04

DONE

Problem No. 8

```
10 LET P=(48/32)*(47/51)*(46/50)*(4/49)
20 PRINT P
30 END
END
NO.8
```

6-38877E-08

DONE

Problem No. 10

```
10 PRINT (5/6)*(3/1/6)
20 PRINT (5/6)*9*(1/6)
30 END
END
NO.10
```

9-44804E-08

3-53011E-08

DONE

Problem No. 12

```
10 PRINT 1-(364/365)*28
20 END
END
NO.12
```

7-39395E-08

DONE

SEC. 13-4

Problem No. 4

```
10 MAT S=ZER(1,4)
20 PRINT "DEFECTIVE"
30 PRINT "LIGHT OPENER BOTH NEITHER"
40 FOR X=1 TO 1000
50 LET C=INT(RND(1))
60 LET C=INT(RND(1))
70 IF L=0 THEN 180
80 LET C=SC(1,2)*S(1,1)+1
90 LET C=SC(1,2)*S(1,1)+1
100 LET S(1,2)=S(1,2)+1
105 IF L=0 THEN 140
110 LET S(1,2)=S(1,2)+1
115 GOTO 50
120 IF C=0 THEN 90
130 LET S(1,2)=S(1,2)+1
140 MAT PRINT S
150 END
END
NO.4
```

```
DEFECTIVE
LIGHT OPENER BOTH NEITHER
42 35 926
DONE
```

SEC. 13-4 Cont'd

Problem No. 6

```
10 LET C=0
20 FOR X=1 TO 500
30 LET R=INT(6*RN0(1)+1)
40 IF R=5 THEN 100
60 GOTO 200
100 LET C=C+1
200 NEXT X
210 PRINT "CUTIVE OR ONE UP"
RUN
END
NB-6
```

DONE

Problem No. 8

```
10 LET N1=1
20 DIM S(500)
30 LET S(1)=1
40 FOR X=1 TO 500
50 LET N1=1
60 LET N1=INT(6*RN0(1)+1)
70 IF N1=1 THEN 120
80 LET S(N1)=S(N1)+1
90 IF N1=1 THEN 140
100 GOTO 140
110 GOTO 140
120 LET N1=N1+1
130 GOTO 60
140 PRINT "ROLLS TIL ONE", "NUMBER OF TIME"
150 FOR X=1 TO N1
160 PRINT X, S(X)
170 PRINT X, S(X)
180 END
RUN
END
NB-8
```

ROLLS TIL ONE NUMBER OF TIMES

1	84
2	26
3	37
4	31
5	35
6	42
7	48
8	23
9	17
10	14
11	16
12	15
13	11
14	1
15	5
16	5
17	1
18	2
19	1
20	3
21	0
22	0
23	4
24	3
25	2
26	1
27	0
28	0
29	0
30	1
31	1
32	0
33	0
34	0
35	1
DONE	

Problem No. 10

```
10 DIM S(1+1)
15 MAT SZER
20 FOR X=1 TO 300
35 LET C=0 TO 10
40 LET R=INT(6*RN0(1)+1)
50 IF R=1 THEN 100
60 LET C=C+1
70 NEXT X
110 LET S(C)=S(C)+1
130 NEXT X
140 PRINT "ONE TWO THREE FOUR FIVE SIX SEVEN"
150 PRINT "EIGHT NINE TEN"
160 PRINT "EIGHT NINE TEN"
170 MAT PRINT S
RUN
END
NB-10
```

ONE	TWO	THREE	FOUR	FIVE	SIX	SEVEN	EIGHT	NINE	TEN
78	150	153	69	32	8	0	0	0	0

DONE

SEC. 13-5

Problem No. 2

```
5 PRINT "ONES PROBABILITY", "TOTAL"
7 LET T=0
10 FOR R=10 TO 0 STEP -1
15 LET R=R+10
20 FOR X=10 TO 10-R+1 STEP -1
30 LET C=C+X/(10-X+1)
40 NEXT X
50 LET P=C*(1/6)+R*(5/6)+(10-R)
60 PRINT R,P,T
70 END
RUN
END
NB-2
```

ONES	PROBABILITY	TOTAL
10	1-65382E-08	1-65382E-08
9	8-26658E-07	8-26658E-07
8	1-94489E-05	1-94489E-05
7	2-47521E-04	2-47521E-04
6	2-17063E-03	2-43816E-03
5	1-30238E-02	-01546E
4	1-15552E-02	-22473E-02
3	-15504E	-22473E-02
2	-29071	-515483
1	-32011	-638495
0	-161306	1-

DONE

Problem No. 4

```
10 REM COMB 100 THINGS 1 AT A TIME=100
20 LET P=100*.00118*.999199
30 PRINT P
40 END
RUN
END
NB-4
```

9-05693E-02

DONE

Problem No. 6

```
10 LET P=100110*.9991100
20 PRINT P
30 END
RUN
END
NB-6
```

9-52127E-02

DONE

Problem No. 8

```
5 PRINT "ONES PROBABILITY"
10 LET N=6
20 FOR R=0 TO 6
30 LET C=1
40 LET C=C+X
50 NEXT X
60 NEXT R
70 FOR R=R TO 1 STEP -1
80 NEXT X
110 NEXT X
120 PRINT R/(6*(5/6)+(6-R)*(1/6)+R)
130 END
RUN
END
NB-8
```

ONES	PROBABILITY
0	-33489E
1	-4516E
2	-20093E
3	5-35637E-02
4	8-03755E-03
5	1-10366E-02
6	2-14035E-03

DONE

Problem No. 10

```
10 FOR R=0 TO 10
15 LET C=1
20 FOR R=10 TO 10-R+1 STEP -1
30 NEXT X
40 NEXT R
50 LET P=C*(1/2)+R*(1/2)+(10-R)
60 LET T=T+P
70 END
80 PRINT T
RUN
END
NB-10
```

-376953

DONE

Problem No. 12

```
5 PRINT "FLIPS PROBABILITY"
10 LET P=1
20 FOR R=1 TO 10
30 LET P=P*(1/2)
40 PRINT R,P
50 NEXT R
60 END
RUN
END
NB-12
```

FLIPS	PROBABILITY
1	.5
2	.25
3	.125
4	.0625
5	.03125
6	.015625
7	7-81859E-03
8	3-90483E-03
9	1-95318E-03
10	9-76552E-04

DONE

Index

Index

- ABS (Y) function, 47
- Addition
 - matrix, 186
 - modular, 67
- Algorithm, Euclidean, 91–92
- Argument, definition of, 47
- APPEND N statement, 118
- Arithmetic, modular; *see* Modular arithmetic
- Arithmetic operators, definition of, 4
- Arrays, 78–79, 84
 - DIM (two-dimensional), 85, 86, 89
 - dimensioning, 85–86
 - MAT instructions in, 176
 - structure of, 79
- Artificial data, 20
- ASCII, 102, 115, 116
- Assignment operator, 10
- Assignment statement, 10
- ATN (X) function, 136
- Axis of symmetry, 123, 124
- Base-2, 93, 94
- Binary files, 118
- Binomial experiments, 212
- Binomial theorem, 212
- Binomial trials, 210–213
- Birthday problem, 205
- Block diagramming; *see* Flowcharting
- Circular functions, 132, 133
- CLE; *see* SCR
- Coefficient matrix, 192
- Column vector, definition of, 179
- Combinations, 200
- Comma, use of, 2, 3, 101
- Comma delimiter, 10–11
- Complex numbers
 - addition of, 148
 - de Moivre's theorem, 152
 - division of, 148
 - multiplication of, 148
 - polar form, 150, 151
 - rectangular form, 147, 149
 - roots of, 152
 - subtraction of, 148
- Complex zeros, 168–175
- Compound fraction, decimal value for, 6
- Compound interest, 55
 - calculating, 32
- Computer list, 35–36, 40–45
- dimensioning, 66
- Computer functions
 - ABS(Y), 47
 - ATN(X), 136
 - DEF FNA(X), 57, 58, 61
 - INT(X), 47, 48, 51
 - RND(X), 62–63
 - SGN(N), 47
 - SQR(Y), 47
 - trigonometric, 133, 136
- CØN, 187
- Conditional transfer, 18, 19
- Congruence conditions, 139
- Conversions
 - base-10 to base-2, 93–96
 - degrees to radians, 133
 - dimensions, 50–51
 - inches to feet and inches, 51, 54
- Coordinate systems, 128
 - polar, 144, 150, 151
 - rectangular, 132, 138, 143, 147
- CØS(X) function, 133
- Cosines, Law of, 139–142
- CREATE command, 110
- Data files, 109–121
 - access, 115
 - ASCII, 116–118
 - binary, 118
 - data storage, 115
 - General Electric, 115
 - Hewlett-Packard, 110–115
 - random access, 112, 118–120
- Data processing, 2
 - arrays, 78
 - questionnaires, 85
 - tabulation, 73–77
- DATA statement, 3–4, 101, 116
- Debugging, 218
- Decision-making, 14
- DEF, 57, 58
- DEG(X), 133
- Degrees, conversion to radians, 133
- Delimiter, 73
 - comma, 10–11
 - semicolon, 10–11

- De Moivre's theorem, 152
- Depressed polynomial, definition of, 169
- Descartes' Rule of Signs, 173, 175
- Dimension conversions, 50–51
- Dimensioning
 - arrays, 85–86
 - lists, 66
- DIM statement, 66, 103
 - two-dimensional, 85, 86, 89
- Division
 - of polynomials, 156–158, 159
 - synthetic, 158
- Dummy argument, definition of, 62
- Dummy data; *see* Artificial data

- E-format, 8–9
- END statement, 2, 12
- Enumeration
 - combinations, 200
 - factorial, 198
 - partitioning, 202
 - permutations, 198–199, 200, 202
 - Principle of, 197–198
- Equality, matrix, 187, 190
- Equals sign, 10
 - in IF–THEN statement, 15
 - as relational operator, 15
- Error diagnosis, 218–224
- Euclidean algorithm, 112–113
 - greatest common factor, 91
- Event, definition of, 205
- Executive program, 4
- Experiment in probability, definition of, 197, 207
- Exponentiation, symbols used for, 4

- Factorial, 198
- Factoring integers, 48–49
- Factor theorem, 160
- Failure in probability, definition of, 197
- Fibonacci numbers, 39, 46
- FILES statement, 110, 117
- Flowcharting, 13–14, 20
- FØR–NEXT statement, 26, 28, 31, 32
- Fractions, reducing, 50–51
- Functions
 - circular, 132, 133
 - computer, *see* Computer functions

- GØSUB statement, 41, 45
- GØTØ statement, 3, 12, 18

- Greatest common factor, 51, 54, 91

- Identity matrix, 187
- IDN, 187
- IF END statement, 111
- IF–THEN statement, 15, 18–19
- IMAGE statement, 227
- Initializing, 9–10
- INPUT statement, 166
- Integers
 - computing greatest, 47
 - factoring, 48–49
- Integral zeroes of polynomials, 159–163
- INT(X) function, 47, 48, 51
- INV() statement, 191–192

- Law of Cosines, 139–142
- Law of Sines, 138–139, 141, 142
- LEN() function, 103
- LET statement, 5–6, 11, 56
 - as assignment statement, 10
- Lists; *see* Computer list
- Location principle, 163
- Logical end, definition of, 69
- Log-on; *see* Sign-on
- Loops, 24–25, 31–34
 - FØR–NEXT, 26, 28
 - machine-made, 26, 28–30
 - nested, 32

- Machine-made loops, 26, 28–30
- MAT instructions, 176
- MAT READ, 178–179
- MAT PRINT, 177, 178, 179
- Matrix, 179; *see also* Arrays
 - coefficient, 192
 - creating zero matrix (ZER), 187
 - filling locations with 1 (CØN), 187
 - forming identity matrix (IDN), 187
 - identity, 187
 - inverse of, 190–191
 - transpose of, 195
- Matrix addition, 186
- Matrix algebra, 185–188
- Matrix equality, 187, 190
- Matrix inverse, 190, 191
 - difference from transpose, 195
- Matrix multiplication, 185–186
 - scalar, 187
- Matrix subtraction, 186
- Maximum, 124

- Minimum, 124
- Modular arithmetic, 67
 - addition, 70
 - multiplication, 70
- Multiplication
 - matrix, 185–186
 - modular, 70
 - of polynomials, 155
 - scalar, 184
- Multiplication symbol, use of, 4
- Mutually exclusive events, 211, 212

- NAME command, 16
- Nested loops, 32
- Nonreal zeros, 169
- Numerical order, 40–41

- OPEN command, 110
- Operands, definition of, 4
- Operators
 - arithmetic, 4
 - assignment, 10
 - relational, 15, 19, 20
- Ordering routine, 65
- Outcome, definition of, 197

- Paper tape, 215
- Parabola
 - definition of, 123
 - plotting, 125–131
- Parentheses, 7–8
- Partitioning, 202
- Pascal's Triangle, 213
- Permutations, 198–199, 200, 202
- Polar axis, definition of, 144
- Polar coordinate system, 151
 - complex numbers, 150
 - polar axis, 144
 - pole, 144
- Pole, definition of, 144
- Polynomials
 - abbreviation of, 159
 - complex zeros, 168–175
 - definition of, 154
 - depressed, 169
 - Descartes' Rule of Signs, 173, 175
 - division of, 156–158, 159
 - Factor theorem, 160
 - integral zeroes of, 159–163
 - Location Principle, 165
 - multiplication of, 155
 - polynomial function, 160
 - quotient, 173
 - real zeros, 163, 165–167
 - Remainder theorem, 159
 - second-degree, 168
 - synthetic division, 158
 - variation in sequence, 173
- Predefined process, 41
- Prime numbers, 48–49
- Principle of Enumeration, 197–198
- PRINT statement, 1, 2, 101
- PRINT USING function, 61, 227
- Probability
 - binomial trials, 210–213
 - “birthday problem,” 205
 - definition of, 197, 204
 - event, definition of, 205
 - experiment, definition of, 197
 - failure, definition of, 197
 - independence, 205
 - outcome, definition of, 197
 - success, definition of, 197
- Program, definition of, 1
 - executive, 4
- Program defined functions, 55–60
- Pseudo random number generator, definition of, 62
- Pythagorean theorem, 132

- Quadratic formula, 122, 168
- Quadratic function
 - definition of, 122
 - graph of, 123–124
 - quadratic formula, 122, 168
 - zeros of, 122–123
- Questionnaire, 77, 85
- Quotient polynomial, 157
 - storing of, 173

- Radians, definition of, 132, 133
- RAD(X) function, 133
- Random access, 115
- Random access files, 112, 118–120
- Random number generator, 62–71, 206–207
 - dummy argument, 62
 - pseudo random number generator, 62
 - RND(X), 62–63
- READ statement, 3–4

- READ #N statement, 117
- Real zeros, 163, 165–167
- Records, 118
- Rectangular coordinate system, 132, 138, 143
 - complex numbers, 147, 149
- Relational operators
 - equals sign as, 15
 - “greater than,” 19
 - “greater than or equal to,” 20
 - “less than,” 19
 - “less than or equal,” 20
 - “not equal to,” 20
- REM statement, 13, 16–17
- Remainder, 51, 91
- Remainder theorem, 159
- Remote terminal, definition of, 1
- Replacement operator; *see* Assignment operator
- RESTORE #N statement, 118, 119
- RETURN statement, 41, 44–45
- Right triangles, 133, 135
 - computing angles, 136
- RND(X) function, 62–63
- Roots, complex numbers, 152
- Rounding off, 57
- Routine, ordering, 65
- Row vector, definition of, 179
- RUN command, 4, 5

- Scalar multiplication, 187
- Scientific notation, 8–9
- SCR command, 4–5
- SCRATCH #N statement, 117, 118
- Selections, 200
- Semicolon delimiter, 10–11
- Sequential access, 115
- SETW statement, 119
- SGN(N) function, 47
- Sign-on, 4
- Simulation, random
 - random number generator, 206–207
- Simultaneous linear equations
 - printing results, 194–195
 - solving, 192–193
- Sines, Law of, 138–139, 141, 142
- SIN(X) function, 133
- Spacing, 58–59
 - comma, 10, 11
 - semicolon, 10, 11, 96
- SQR(Y) function, 47

- Statements
 - DATA, 3–4
 - DEF, 57, 58
 - DIM, 66, 85, 86
 - END, 2, 11
 - FØR–NEXT, 26, 31, 32
 - GØSUB, 41, 45
 - GØTØ, 3, 11, 18
 - IF–THEN, 15, 18–19
 - INPUT, 166
 - LET, 5–6, 10, 11, 56
 - READ, 3–4
 - REM, 13, 16–17
 - RESTØRE, 108, 110
 - RETURN, 41, 44–45
 - STØP, 59
- STØP statement, 59
- Strings, 101–109
- String array scheme, 106–108
- String variable, 101, 103
- Subroutine, 41, 45
- Subscripts, 35, 103
- Substring scheme, 103
- Subtraction, matrix, 186
- Success in probability, definition of, 197
- Sum array, 186
- Symmetry
 - axis of, 123
 - definition of, 124
- Syntax errors, 220
- Synthetic division, definition of, 158
- System commands, 4–5
 - NAME, 16
 - RUN, 4, 5
 - SCR, 4–5
 - Sign-on, 4

- TAB(X) function, 225
- Tabulating
 - one item, 73–75
 - several items, 75
 - yes–no answers, 76–77
- TAN(X) function, 133
- Tape, paper, 215
- Tape punch, 215
- Tape reader, 216
- Transpose, of a matrix, 195
- Transfer
 - conditional, 18
 - unconditional, 18

- Triangle
 - area of, 138
 - Law of Cosines, 140–142
 - Law of Sines, 138–139
 - right triangles, 133, 135, 136
- Trigonometric ratios, 133
- Trigonometry
 - area of triangle, 138
 - circular functions, 132
 - complement, 135
 - congruence conditions, 139
 - Law of Cosines, 139–142
 - Law of Sines, 138–139, 141, 142
 - polar coordinate system, 144, 150, 151
 - Pythagorean theorem, 132
 - radians, 132
 - rectangular coordinate system, 132, 138, 143
 - trigonometric computer functions, 133, 136
 - trigonometric ratios, 133
- TRN(), 195–196
- Two-dimensional list; *see* Arrays
- Unconditional transfer, 18
- Variation in number sequence, definition of, 173
- Vectors
 - column, 179
 - row, 179
- WRITE #N statement, 117
- ZER, 187
- Zero subscripts, 155
- Zeros of polynomials
 - complex zeros, 168–175
 - of function, 159
 - integral zeros, 159–163
 - nonreal zeros, 169
 - real zeros, 163, 165–167

BASIC BASIC: An Introduction to Computer Programming in BASIC Language, Second Edition

James S. Coan

"... an excellent introduction to the use of BASIC through remote terminals and time sharing ... clearly written and well-organized," said *Computing Reviews* about the first edition of this popular introductory book. Anyone can learn to write computer programs in BASIC using this book. Not only does it describe the essential statements of BASIC and use them in sample programs, but this new edition now includes a chapter on strings and files.

The author uses over 100 sample programs to illustrate the essential techniques of the language and to integrate BASIC programming with mathematics. Each language statement or capability is clearly explained at the time that it is first used in a sample program. Every section is followed by practice problems. Solutions to even-numbered problems appear in the text, the remainder in the separate Teacher's Guide.

Other Books of Interest . . .

ADVANCED BASIC: Applications and Problems

James S. Coan

This is the follow-up BASIC text for those who want to extend their expertise. It offers advanced techniques and applications, including coordinate geometry, area, sequences and series, polynomials, graphing, simulations, and games. #5855-1, paper, #5856-X, cloth, 192 pages.

THE BASIC WORKBOOK: Creative Techniques for Beginning Programmers

Kenneth E. Schoman, Jr.

Here is a hands-on approach to learning BASIC and the fundamentals of problem-solving using a computer. Through many exercises, readers develop a workable BASIC vocabulary, a feeling for the logic and intrigue of programming algorithms, and the self-confidence needed to use a computer in a variety of applications. #5104-2, paper, 128 pages.

GAME PLAYING WITH BASIC

Donald D. Spencer

Enjoy the challenge of competition by playing such computer games and puzzles as 3-D Tic-Tac-Toe, Nim, Roulette, Black Jack, Magic Squares, the 15 Puzzle, Go-Moko, Keno, Morra, Baccarat, and many others. The author writes in a nontechnical style and includes the rules of each game, how each game works, illustrative flowcharts and diagrams, and the output produced by each program. #5109-3, paper, 176 pages.



HAYDEN BOOK COMPANY, INC.

Rochelle Park, New Jersey

ISBN 0-8104-5106-9